


Chevy Van

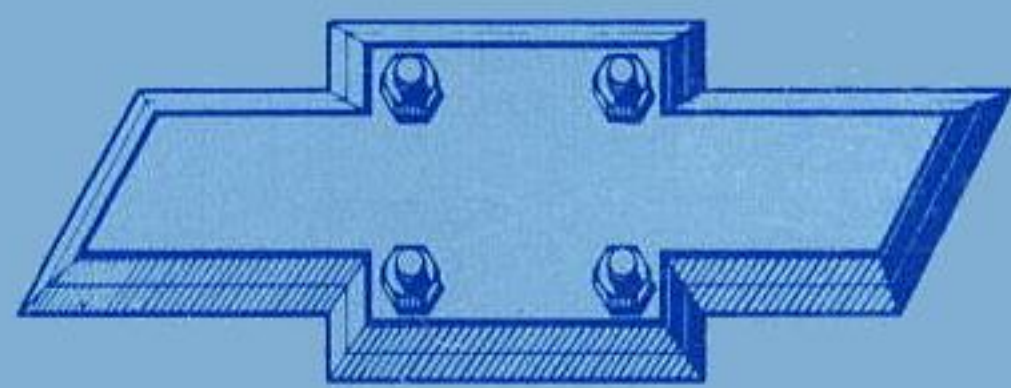

1986 Chevrolet Owner's Manual

Keep with vehicle at all times.

**Contains important operating,
safety, & maintenance instructions.**

1986 CHEVROLET VAN OWNER'S MANUAL

Table of Contents

Section	Page
0 Important Information on Vehicle Loading.....	0- 1
1 Before Driving Your Vehicle	1- 1
2 Starting and Operating	2- 1
Steering Column Controls	2-39
Floor Controls	2-46
Instrument Panel	2-51
Other Controls and Features	2-69
3 In Case of Emergency	3- 1
4 Appearance Care	4- 1
5 Service and Maintenance	5- 1
6 Specifications And Product Service Publications	6- 1
7 Service Station Information, Index	7- 1

This manual should be considered a permanent part of this vehicle. It should stay with the vehicle when sold, to provide the next owner with important operating, safety, and maintenance information.

All information, illustrations and specifications in this manual are based on the latest product information available at the time of printing. We reserve the right to make changes at any time without notice.

For vehicles sold in Canada, substitute the name "General Motors of Canada Limited" wherever the name "Chevrolet Motor Division" appears in this manual.

INTRODUCTION

CONTENTS

Graphic Symbols0-3
Important Information On Vehicle Loading0-5
Vehicle Identification Number (VIN) Plate0-8

This manual has been prepared to acquaint you with the operation and maintenance of your 1986 Chevrolet vehicle, and to provide important safety information. It is supplemented by a Maintenance Schedule and Log booklet and a Warranty and Owner Assistance Information booklet. We urge you to read all three publications carefully. Following the recommendations will help assure the most enjoyable, safe and troublefree operation of your vehicle.

When it comes to service, remember that your Chevrolet dealer knows your vehicle best and is interested in your complete satisfaction. Your dealer invites you to return for all of your service needs both during and after the warranty period.

To help dealers handle your needs, Chevrolet has a number of Zone Offices throughout the country. If you have a problem that has not been handled to your satisfaction, follow the steps in the separate "Warranty and Owner Assistance Information" booklet.

We thank you for choosing a Chevrolet product, and want to assure you of our continuing interest in your motoring pleasure and satisfaction.












**CHEVROLET MOTOR DIVISION
GENERAL MOTORS CORPORATION
30007 Van Dyke Ave.
Warren, Michigan 48090**



For continuing satisfaction keep your vehicle all GM. General Motors Parts are identified by one of these trademarks.


GRAPHIC SYMBOLS

Some of the following symbols are used to identify controls and displays on your vehicle.

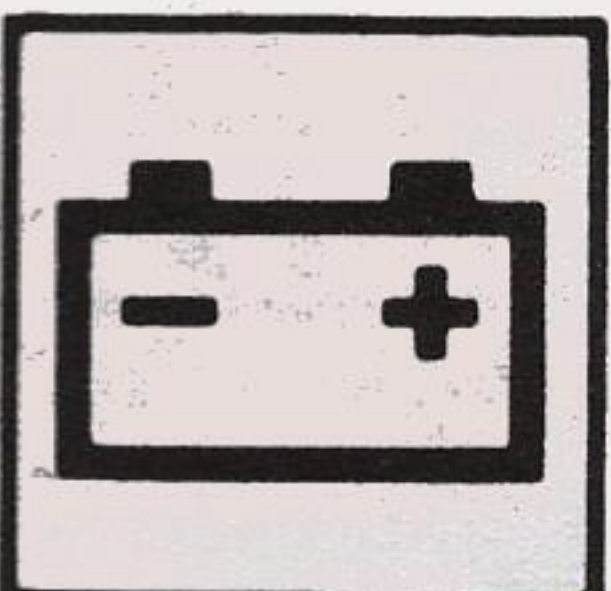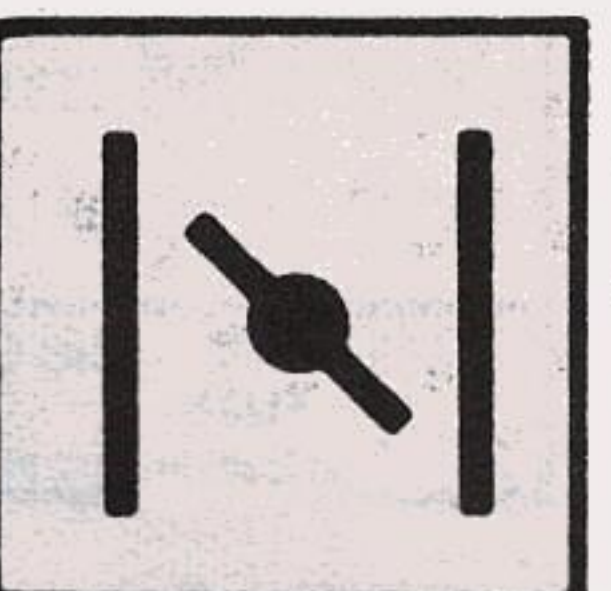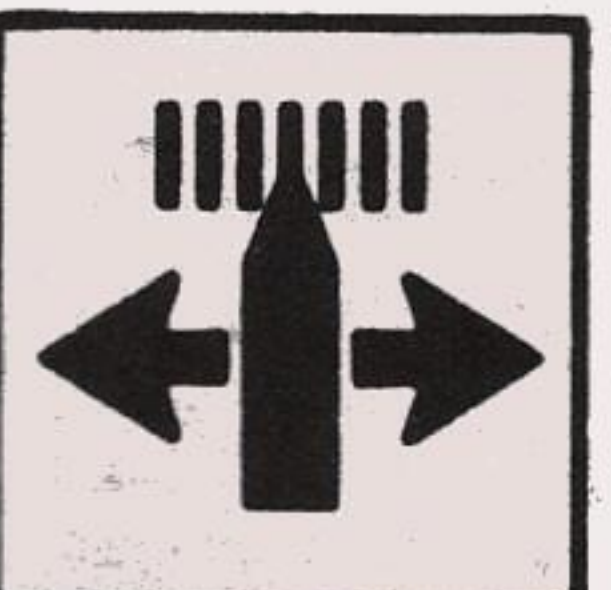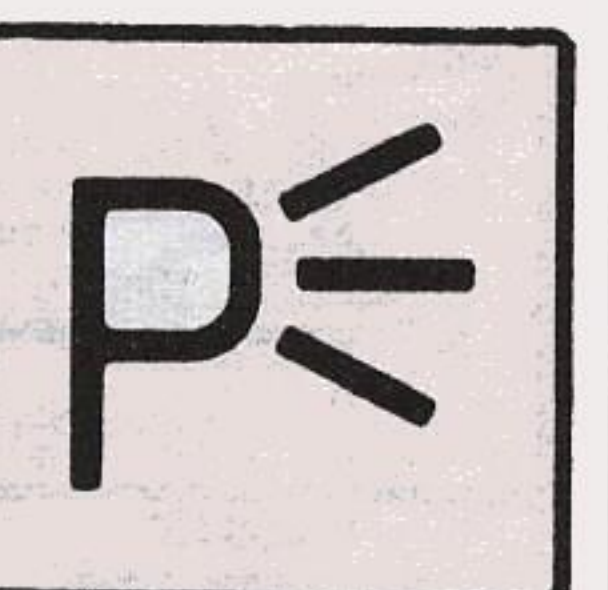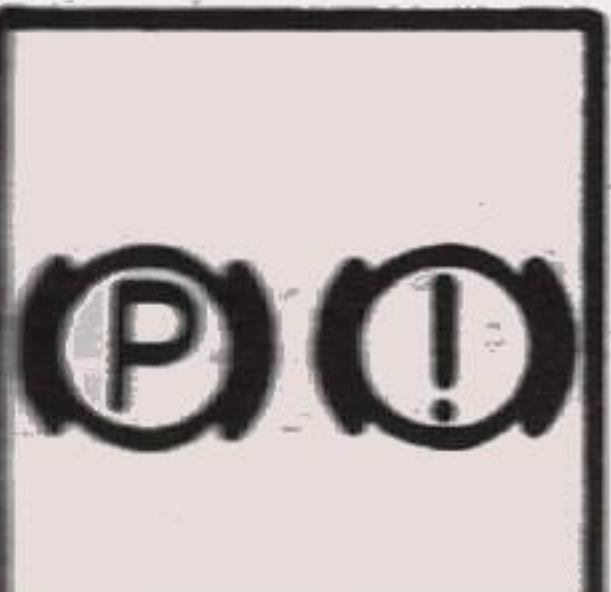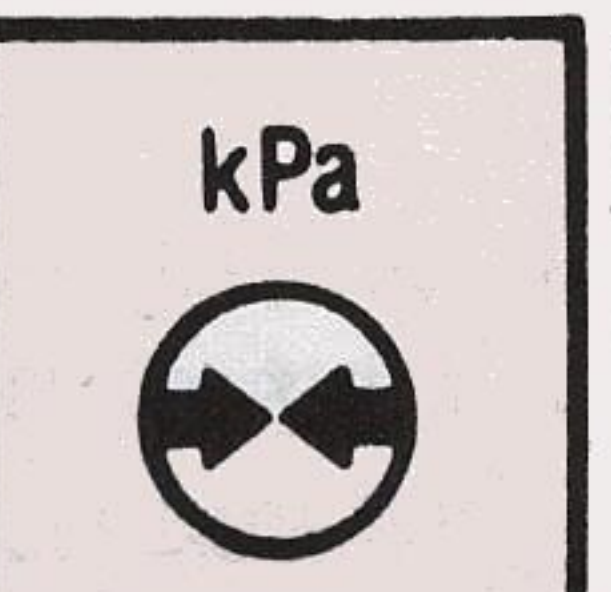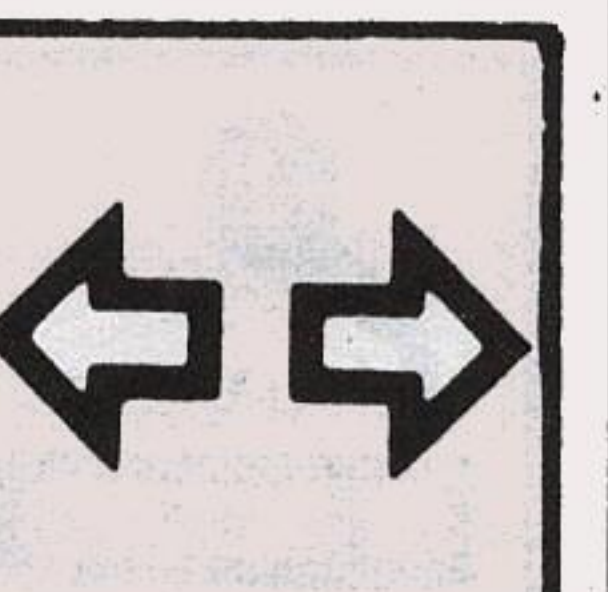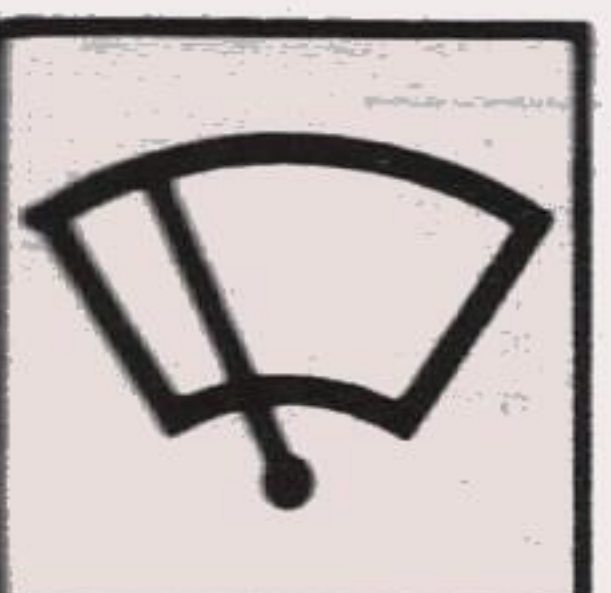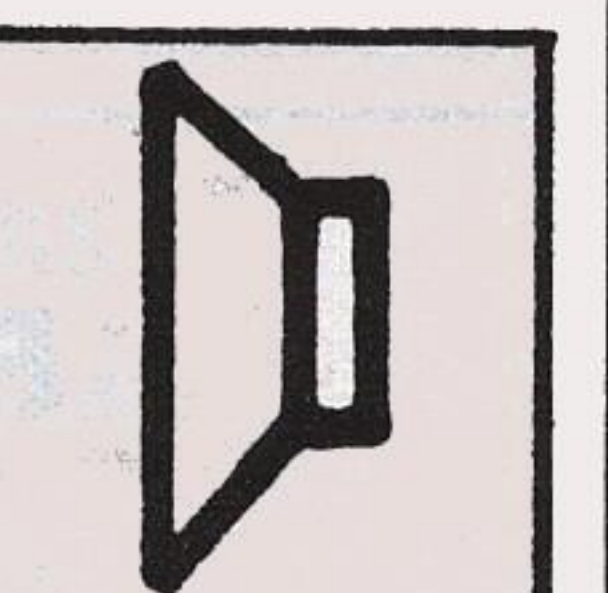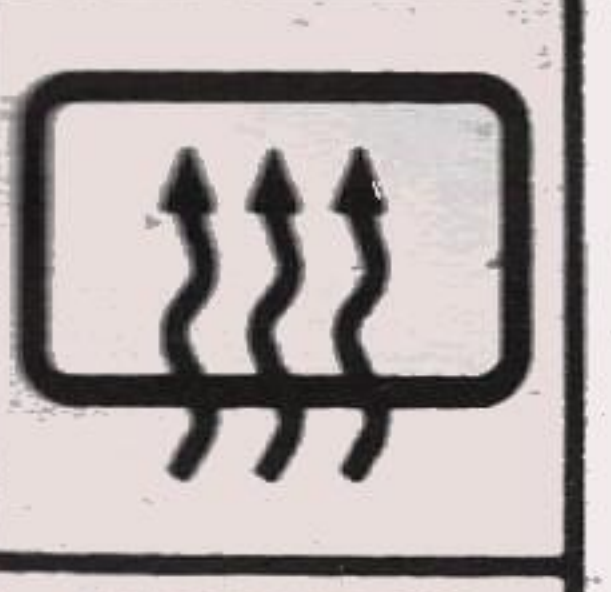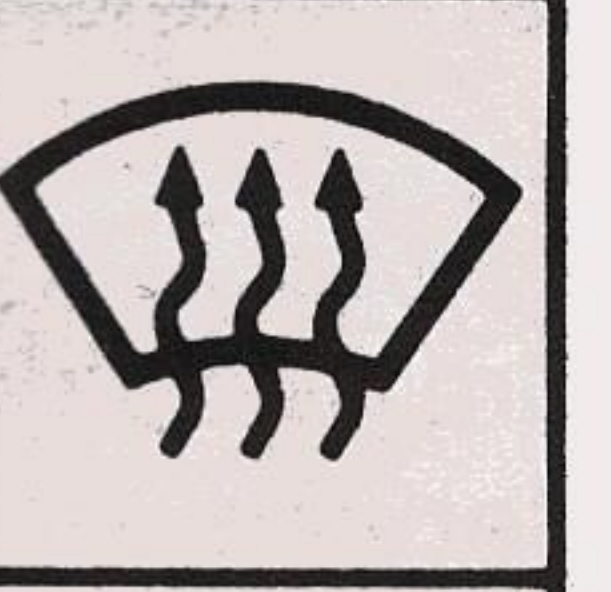				
ENGINE COOLANT TEMPERATURE	BATTERY CHARGING SYSTEM	CHOKE	ENGINE OIL TEMPERATURE	ENGINE OIL PRESSURE
				
FUEL	HAZARD WARNING FLASHER	RADIO SELECTOR	RADIO VOLUME	PARKING LIGHTS
				
BRAKE	BRAKE	MANIFOLD VACUUM	LIGHTS OR HIGH BEAM	TURN SIGNALS
				
WINDSHIELD WIPER	WINDSHIELD WASHER	REAR WINDOW WIPER & WASHER	WINDSHIELD WIPER & WASHER	SPEAKER
				
REAR WINDOW DEFOGGER	WINDSHIELD DEFROSTER			

B-09663

GRAPHIC SYMBOLS (CONT.)

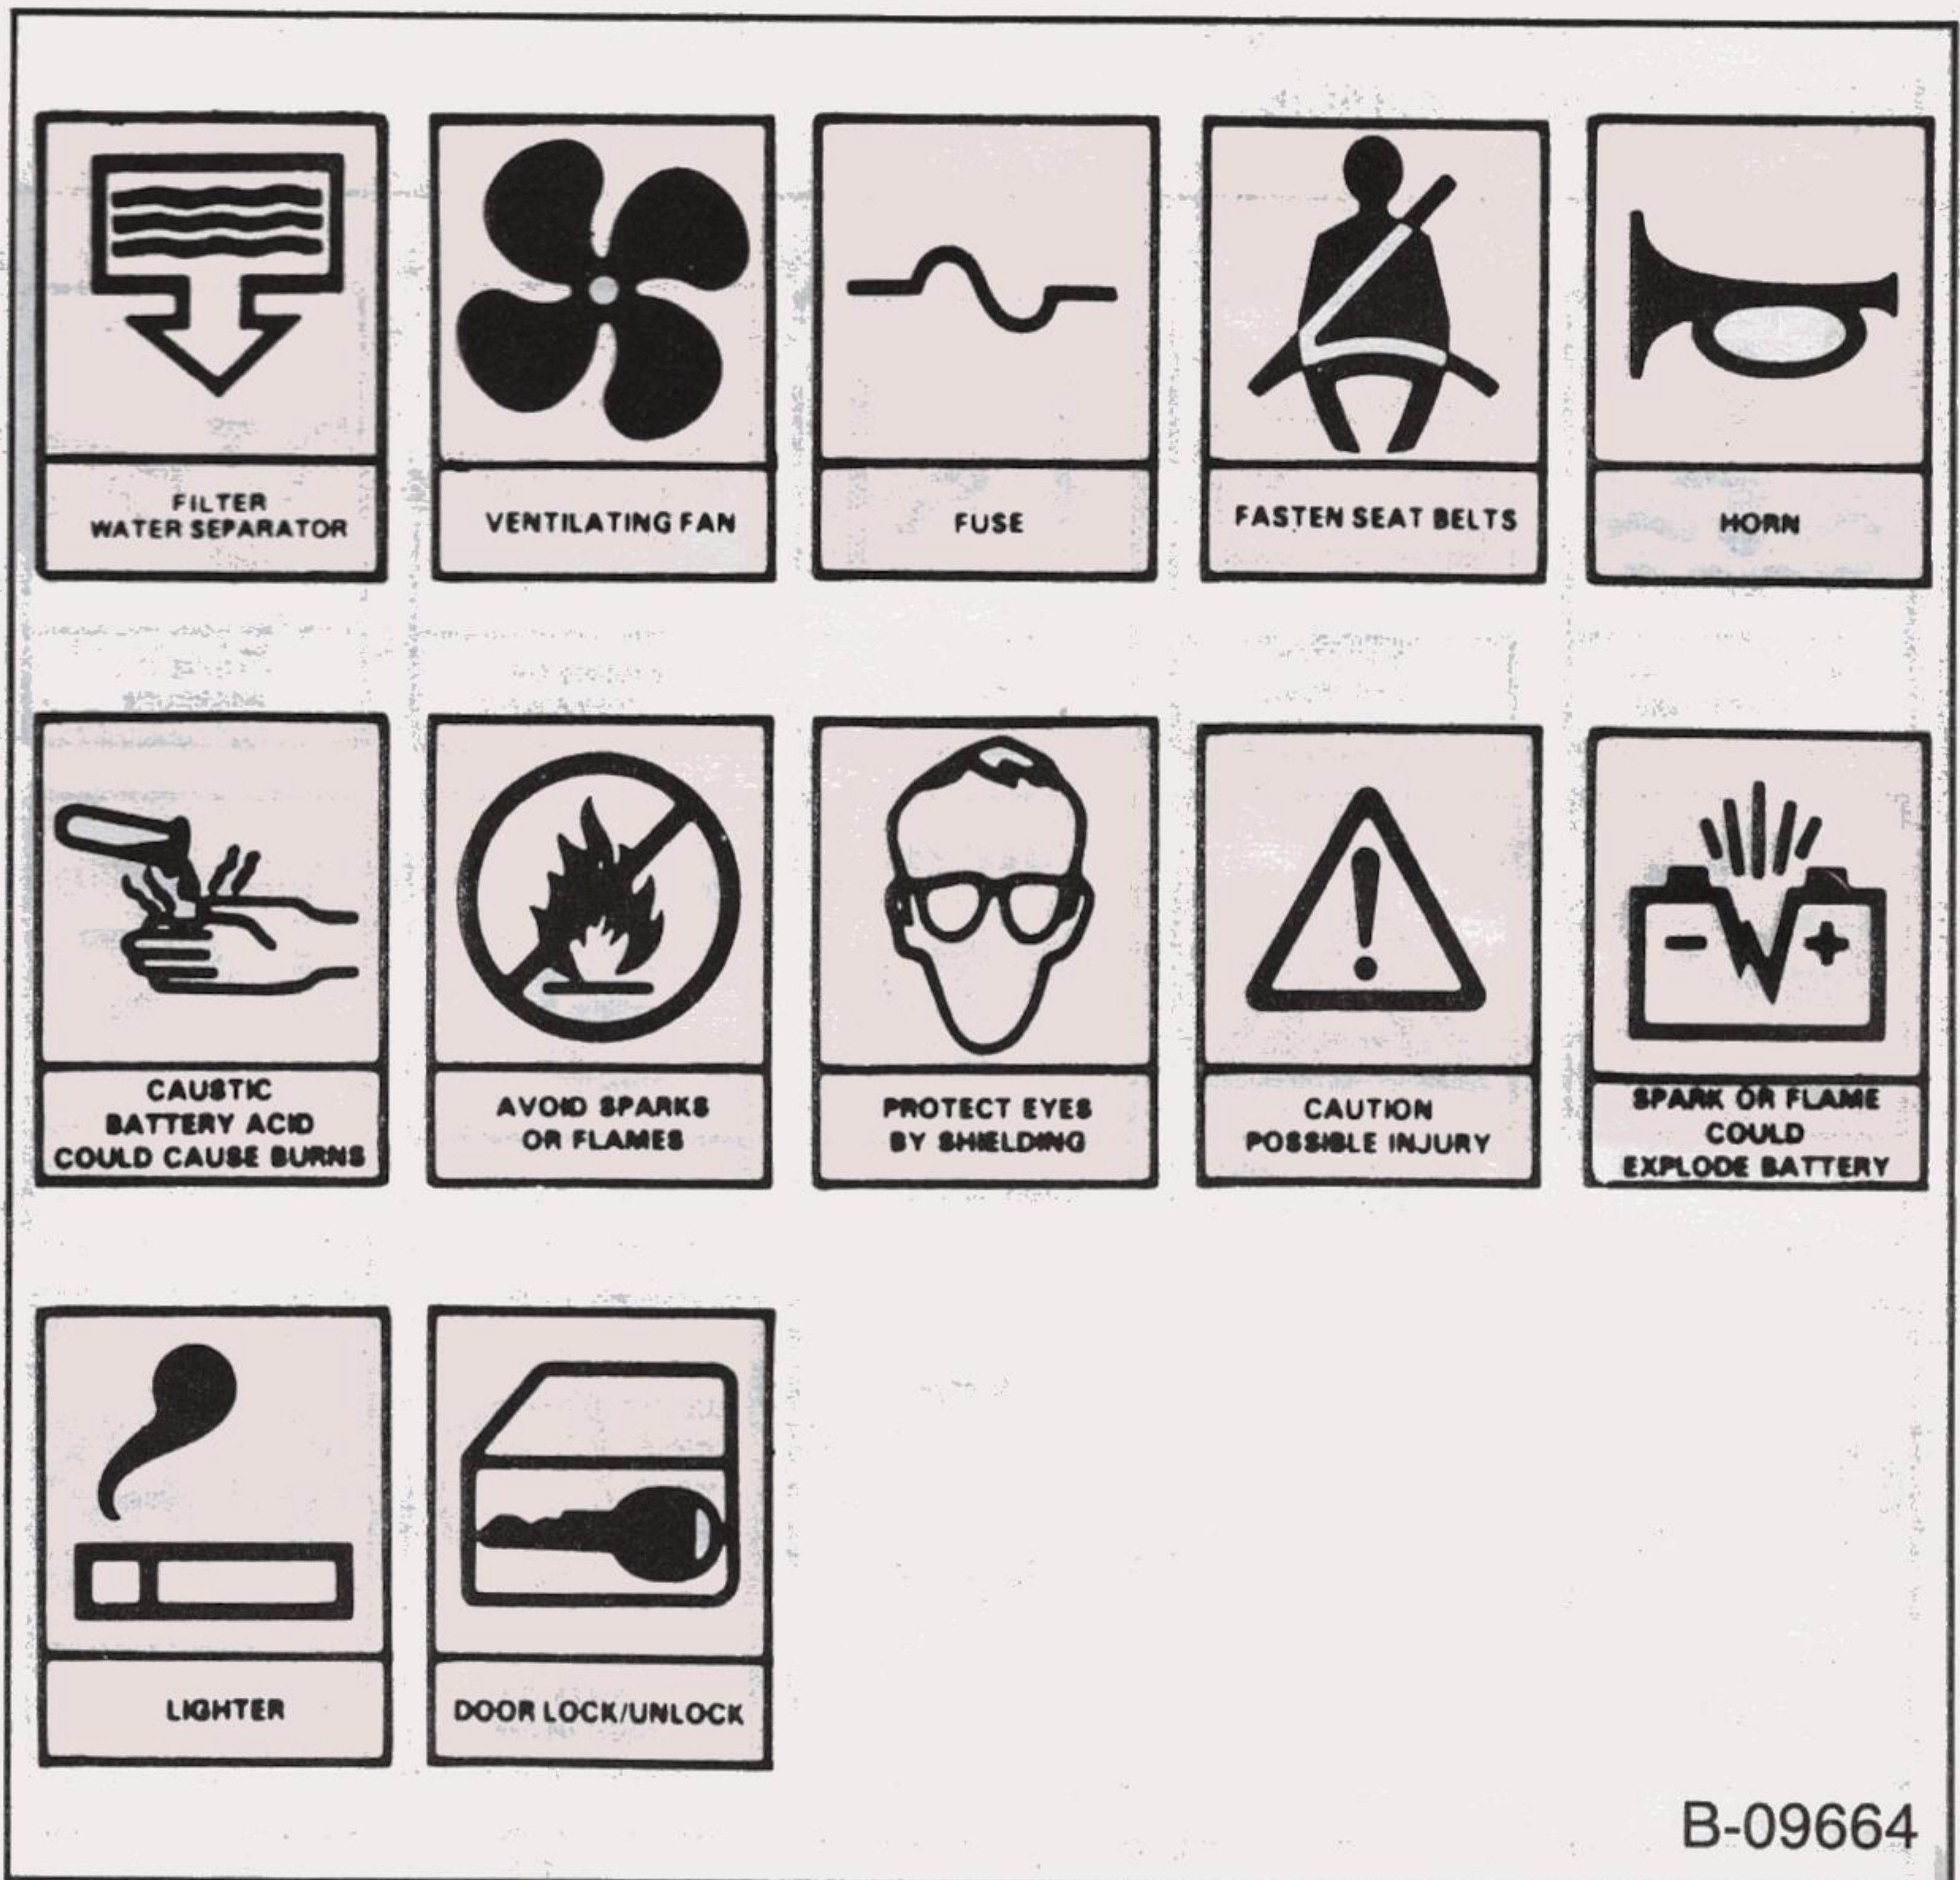

FRENCH OWNER'S MANUAL

If preferred, a French Owner's Manual can be obtained either from your dealer or by writing to General Motors of Canada Limited, Service Publications Department, Oshawa, Ontario, L1J 5Z6.

Aux Propriétaires Canadiens:

Vous pouvez vous procurer un exemplaire de ce guide en français chez votre concessionnaire ou au Service des publications techniques, General Motors du Canada Limitee, Oshawa, Ontario L1J 5Z6.

IMPORTANT INFORMATION ON VEHICLE LOADING

OVERLOADING

CAUTION: The components of your vehicle are designed to provide satisfactory service if the vehicle is not loaded in excess of either the Gross Vehicle Weight Rating (GVWR) or the maximum front and rear Gross Axle Weight Ratings (GAWR's). These ratings are listed on the Vehicle Certification Label located on the trailing edge of the driver's (left-hand) door.

Overloading can result in loss of vehicle control and personal injury, either by causing component failures or by affecting vehicle handling. It can also shorten the service life of your vehicle.

Your dealer can advise you of the proper loading conditions for your vehicle. Using selected heavier suspension components for added durability does not increase any of the weight ratings shown on the Vehicle Certification Label.

LOADED—MAXIMUM GVWR: 2540 kg/5600 LBS.

FRONT GAWR: 1318 kg/2906 LBS. REAR GAWR: 1318 kg/2906 LBS.



*Front curb 1017 kg/2244 LBS.
Front Cargo &
Pass. Load 179 kg/ 395 LBS.
 1196 kg/2639 LBS.

*Rear curb 797 kg/1758 LBS.
Rear Cargo &
Pass. Load 161 kg/ 355 LBS.
 958 kg/2113 LBS.

TOTAL WEIGHT AT GROUND: 2155 kg/4752 LBS.

*Curb weight equals the weight of the vehicle without driver, passenger or cargo, but including fuel and coolant.

B-09836

Maximum Front And Rear Axle Weights

The weight of the cargo load must be properly distributed over both the front and rear axles. The Certification Label shows the maximum weight that the front axle can carry (front GAWR). It also shows the maximum weight that the rear axle can carry (rear GAWR). The GVWR is the maximum permissible loaded weight of the vehicle and takes into account the capabilities of the engine, transmission, frame, springs, brakes, axles and tires. Actual loads at the front and the rear axles can only be determined by weighing the vehicles. This can be done at highway weigh stations or other such places. See your dealer for help. The cargo load should be distributed on both sides of the centerline as equally as possible.

Effect On Warranty

Your new vehicle warranty does not apply to any part of your vehicle which has been subject to misuse. Any part which fails because of overloading has been subjected to misuse.

CERTIFICATION LABEL

MFD. BY GENERAL MOTORS CORPORATION			
2/86			
LB/kg TIRES RIMS PSI/kPa	GVWR	GAWR FRT	GAWR RR
	4649/2109	2100/953 P195/75R15 15 X 6 JJ 35/241	2600/1180 P195/75R15 15 X 6 JJ 35/241
	Cold		
SPARE TIRE		SPARE TIRE	SPARE WHEEL
T155/90D16		60/414	16 X 4T
INFLATION PRESSURE COLD			
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. 1CCCC14B80C100001 MPV			
THIS VEHICLE EQUIPPED FOR		1000/453	LBS. PAYLOAD
SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION			

31MR83
PART NO. 15596025 PRINTED IN U.S.A.

B-09637

Your Certification Label shows the GVWR, and the front and rear GAWR's for your vehicle.

Gross Vehicle Weight (GVW) is the weight of originally equipped vehicle and all items added to it after it has left the factory. This would include bodies, winches, booms, etc.; the driver and all occupants; and the load the vehicle is carrying. The GVW must not exceed the GVWR. Also, the front and rear gross axle weights must not exceed the front and rear GAWR's.

Trailer Package

Your vehicle, if equipped with a Trailing Package, also carries a load rating for the combination of the vehicle and the trailer it tows. This is abbreviated GCWR (Gross Combination Weight Rating). Gross Combination Weight (GCW) is defined as "The total of the weight of the loaded tow vehicle and the loaded trailer." Remember, the weight of passengers is part of the load in the tow vehicle. Be sure you have included the weight of everything you put into the trailer before you weigh it.

Tires

The tires on your vehicle must be of the proper size and properly inflated for the load which you are carrying.

The Vehicle Certification Label shows the originally equipped tire size and recommended inflation pressures.

VEHICLE IDENTIFICATION NUMBER (VIN)

VEHICLE IDENTIFICATION NUMBER

1 G C D C T 1 C 1 4 N 4 G F 1 0 0 0 1

Nation of Origin
1 = U.S. Built
2 = Canadian Built
3 = Mexican Built

Manufacturers
G = General Motors

Make
A. Chevrolet Bus*
B. Chevrolet Incomplete
C. Chevrolet Truck
D. GMC Incomplete
T. GMC Truck
O. GMC Bus
5. GMC MPV
8. Chevrolet MPV
*Van with 4th Seat

Code
1
2
3

Series
1/2 Ton
3/4 Ton
1 Ton

Check Digit

Model Code
G

Year
Year
1986

Assembly Plant
B Baltimore 2 Moraine
F Flint 3 Detroit, MI
J Janesville 4 Scarborough CA
S St. Louis 7 Lordstown
V Pontiac 8 Shreveport
I Oshawa

Production Sequence Number

Engine Type and Make

Code	Producer	Type	RPO
B	Chevrolet	2.8L V6 2BBL	LR2
C	Chevrolet	6.2L V8 Diesel	LH6
E	Pontiac	2.5L L4 TB1	LN8
F	Chevrolet	5.0L V8 4BBL	LF3
H	Chevrolet	5.0L V8 4BBL	LE9
J	Chevrolet	6.2L V8 Diesel	LL4
K	Chevrolet	5.7L V8 LPG	LT9 & 4Y5
L	Chevrolet	5.7L V8 4BBL	LS9
M	Chevrolet	5.7L V8 4BBL	LT9
N	Chevrolet	4.3L V6 4BBL	LB1
R	Chevrolet	2.8L V6 TB1	LL2
T	GM de Mexico	4.8L L6 1BBL	L25
W	Chevrolet	7.4L V8 4BBL	LE8
Z	Chevrolet	4.3L V6 TB1	LB4

Line and Chassis Type

Code	Line	Chassis Type
C	Conventional Cab	4 x 2
D	Military Truck	4 x 4
K	Conventional Cab	4 x 4
G	Van	4 x 2
P	Forward Control	4 x 2
S	Small Conventional Cab	4 x 2
T	Small Conventional Cab	4 x 4
M	Small Van	4 x 2

GVWR/BRAKE SYSTEM

Code	GVWR Range	Brake System
B	3001-4000	Hydraulic
C	4001-5000	Hydraulic
D	5001-6000	Hydraulic
E	6001-7000	Hydraulic
F	7001-8000	Hydraulic
*G	8001-9000	Hydraulic
H	9,001-10,000	Hydraulic
J	10,001-11,000	Hydraulic
K	14,001-16,000	Hydraulic

*Includes G - Van Bus

B-09835

Vehicle Identification Number

This is the legal identifier of your vehicle. It appears on a plate attached to the left top of the instrument panel. This plate can be seen easily through the windshield from outside your vehicle. The VIN also appears on the certificates of Title and Registration.

SECURE CARGO

CAUTION: To help avoid personal injury during a collision or sudden maneuver, always take extra care when stowing things. Put luggage or cargo in the rear area if possible. Cargo weight, whether in the rear area or on the roof, should be located as far forward as possible. Secure all items in place to help keep them from being thrown about. Do not pile luggage or cargo higher than the seatbacks.

For continuing satisfaction keep your vehicle all GM. General Motors parts are identified by one of these trademarks.



SECTION 1

BEFORE DRIVING YOUR VAN

CONTENTS

Driver Daily Checklist	1- 1
Keys	1- 2
Doors And Door Locks	1- 3
Windows	1- 7
Mirrors	1- 8
Seat Controls	1- 8
Seat Belt Systems	1-13

DRIVER DAILY CHECKLIST

Be sure you know how to use your vehicle and its equipment before operating it.

BEFORE ENTERING THE VEHICLE

1. See that the windows, mirrors, lights and reflectors are undamaged, clean and unobstructed.
2. If any tire does not look normal, check it with a pressure gage.
3. Look for fluid leaks.
4. Be sure everything is properly stowed.
5. Check the area behind the vehicle if you are about to back up.

BEFORE DRIVING OFF

1. Lock all doors.
2. Adjust the seat.
3. Adjust the inside and outside mirrors.
4. Always properly fasten your seat belt. Check that seat belts for all other occupants are fastened properly. Never let anyone ride in the cargo area or any other place in or on this vehicle where there is no seat belt.
5. Check that all warning lights work as the key is turned to "Run" or "Start."
6. Check all gages (including the fuel gage).
7. Release the parking brake (and make sure the "BRAKE" light turns off).

See related topics in this manual or the Maintenance Schedule folder, especially if problems are found.

APPLICABLE SAFETY STANDARDS

This vehicle was originally designed, manufactured and sold by General Motors Corporation as a bus, multi-purpose vehicle (MPV) or truck. General Motors Corporation has certified that as a bus, MPV or truck this vehicle conforms to all applicable Federal Motor Vehicle Safety Standards (FMVSS).


This vehicle was not originally intended for use as a school bus unless sold as an incomplete vehicle equipped with School Bus Application Option RPO B3D. Therefore, this vehicle need not and does not conform to those FMVSS requirements specifically intended only for school buses, except to the extent specified in option B3D when selected.

However, this does not prevent subsequent alteration of this vehicle from a bus, MPV or truck into a school bus. In such a situation, the vehicle alterer should affix a vehicle alterer's label to this vehicle. This label should indicate the name of the vehicle alterer; the month and year of alteration; that, as altered, the vehicle conforms to all applicable Federal Motor Vehicle Safety Standards; and the new type classification of the vehicle; i.e., "school bus."

KEYS

Two different keys are provided for the locks on your vehicle. The key code is stamped on the "knock-out" plug in each key head.

- **Key with square head** — for the ignition lock only.
- **Key with oval head** — for all other locks.

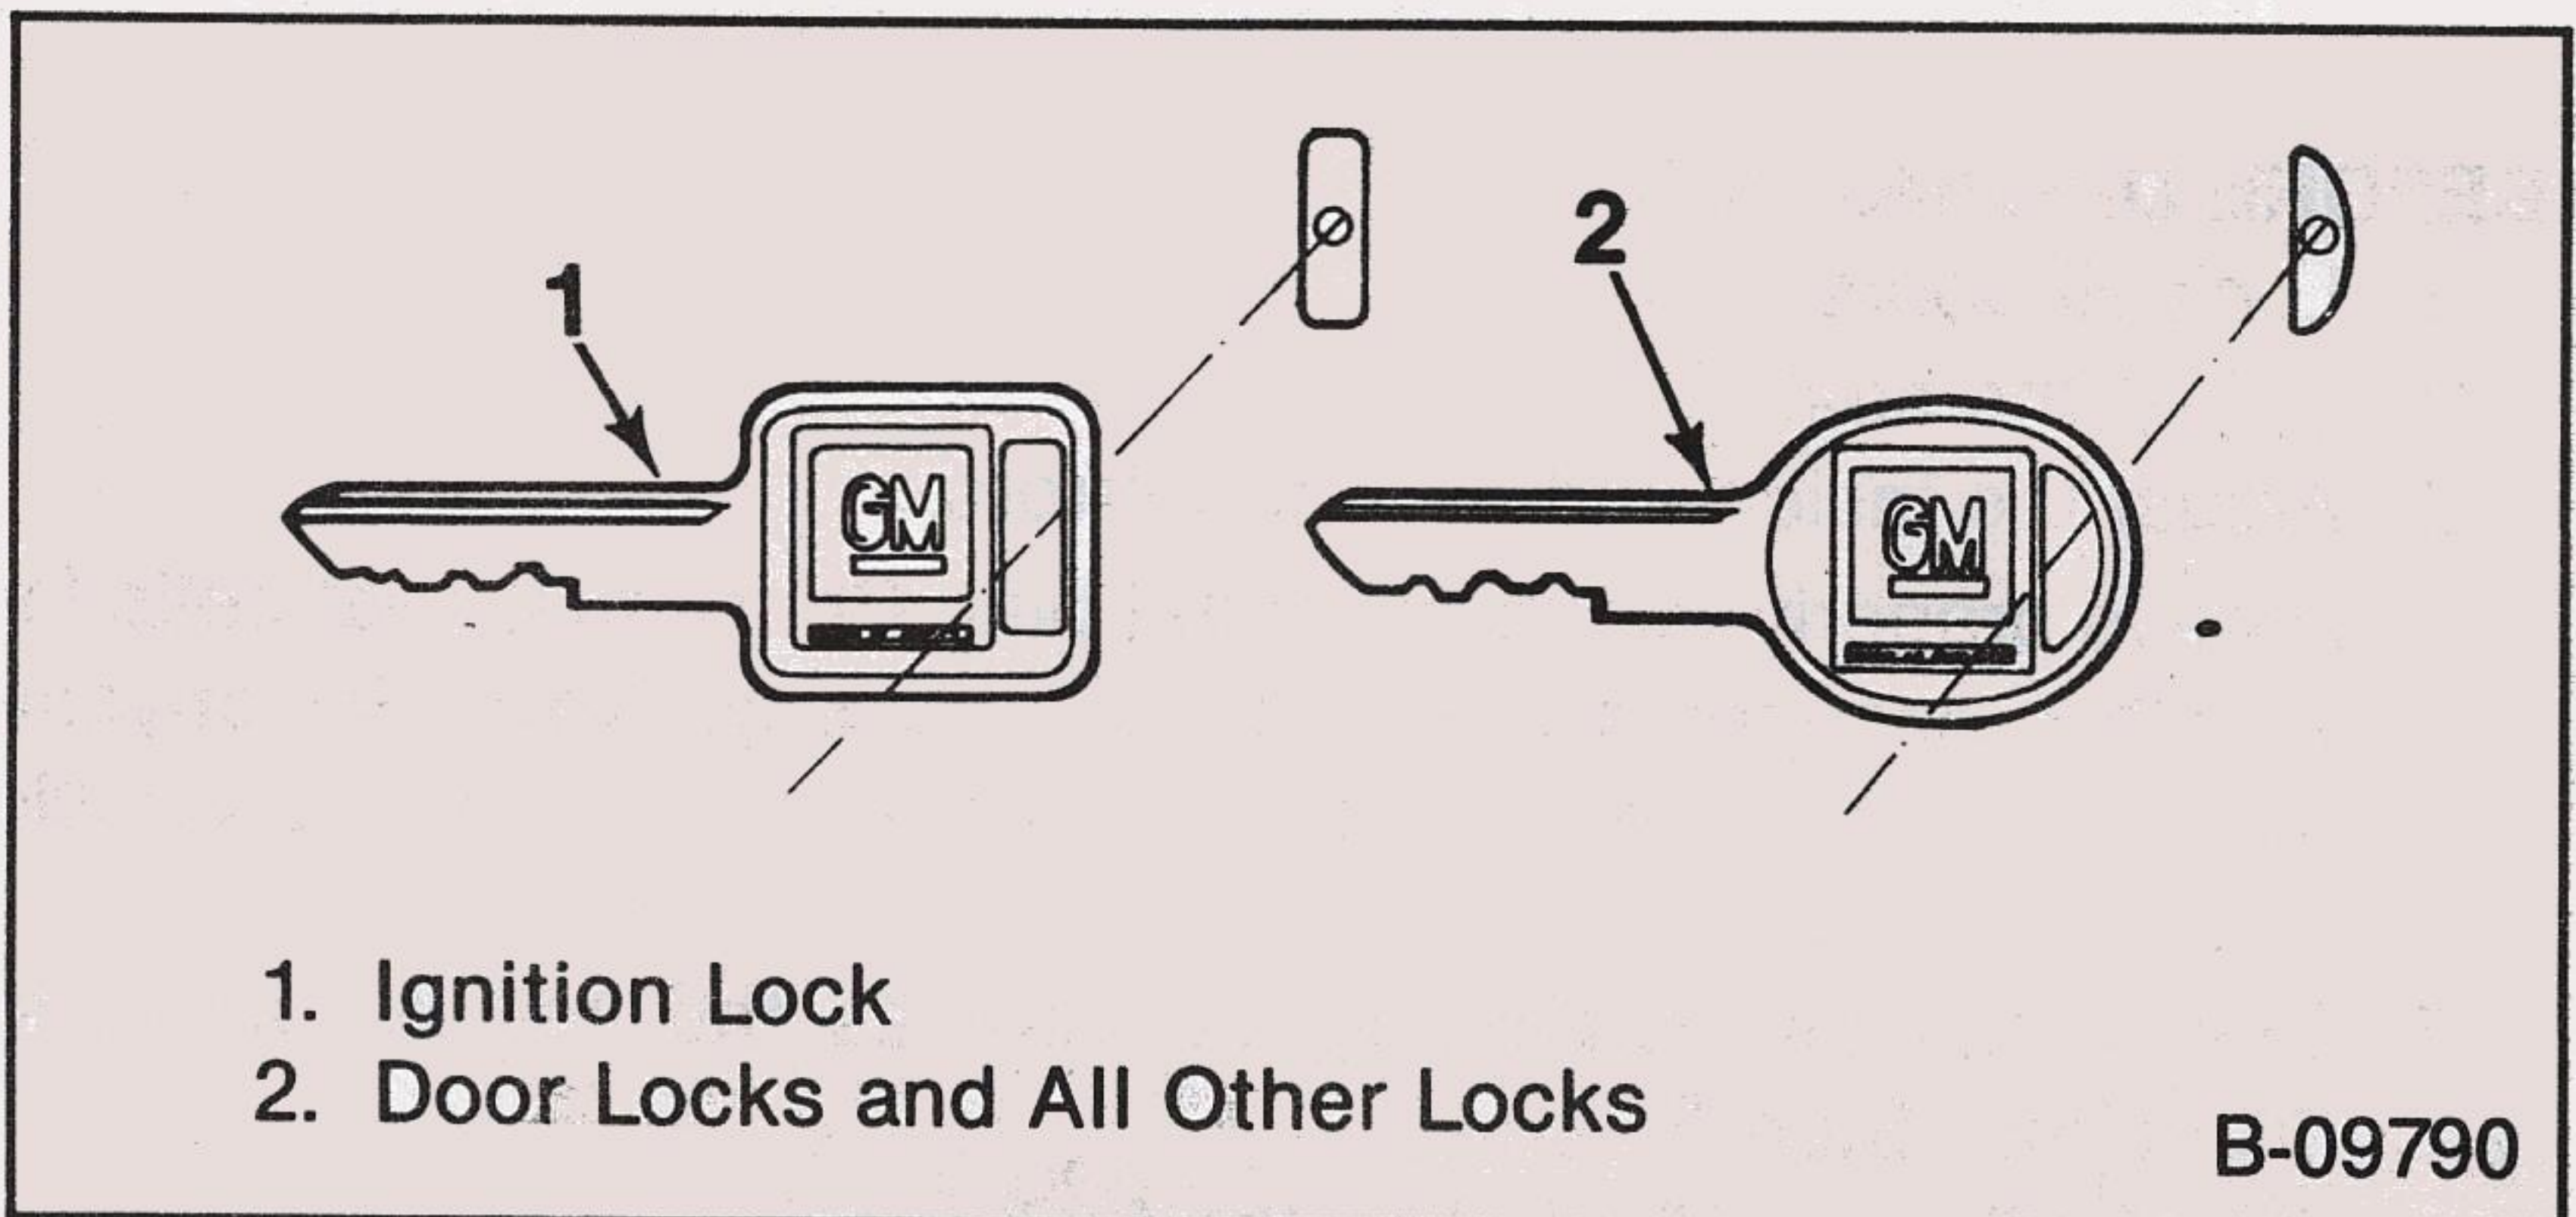

For vehicle security:

- Record the key code numbers, then knock the plugs out of the keys.

- **Keep the key codes in a safe place (such as your wallet), not in the vehicle.**

If the original keys are lost, duplicates can be made using the key codes. Stamped on the key is a letter indicating the proper key blank needed if duplicates are required. Contact any GM dealer or a locksmith.

If you park in an attended lot, leave only your square-head ignition key. Lock your glove box and take the oval-head key with you. This will help prevent illegal entry into your vehicle or any locked compartment.

It's a good idea to carry an extra key to the door in your wallet or purse, should you accidentally lock your regular keys in the vehicle. To help protect your vehicle and its contents against theft, General Motors has provided anti-theft features which would also make it inconvenient and possibly expensive to enter the vehicle if you are locked out.

DOORS AND DOOR LOCKS


ALWAYS LOCK THE DOORS

CAUTION: To help reduce the risk of personal injury in an accident, always lock the doors when driving. Along with using the seat belts properly, locking the doors (etc.) helps prevent people from being thrown from the vehicle. It also helps prevent unintended opening of the doors and helps keep out intruders.

SLIDING DOOR

Each time the sliding door is closed, both the front and rear edges of the door should be checked to see that they are latched and securely shut.

To open the sliding door, rotate the handle upward and slide the door rearward.

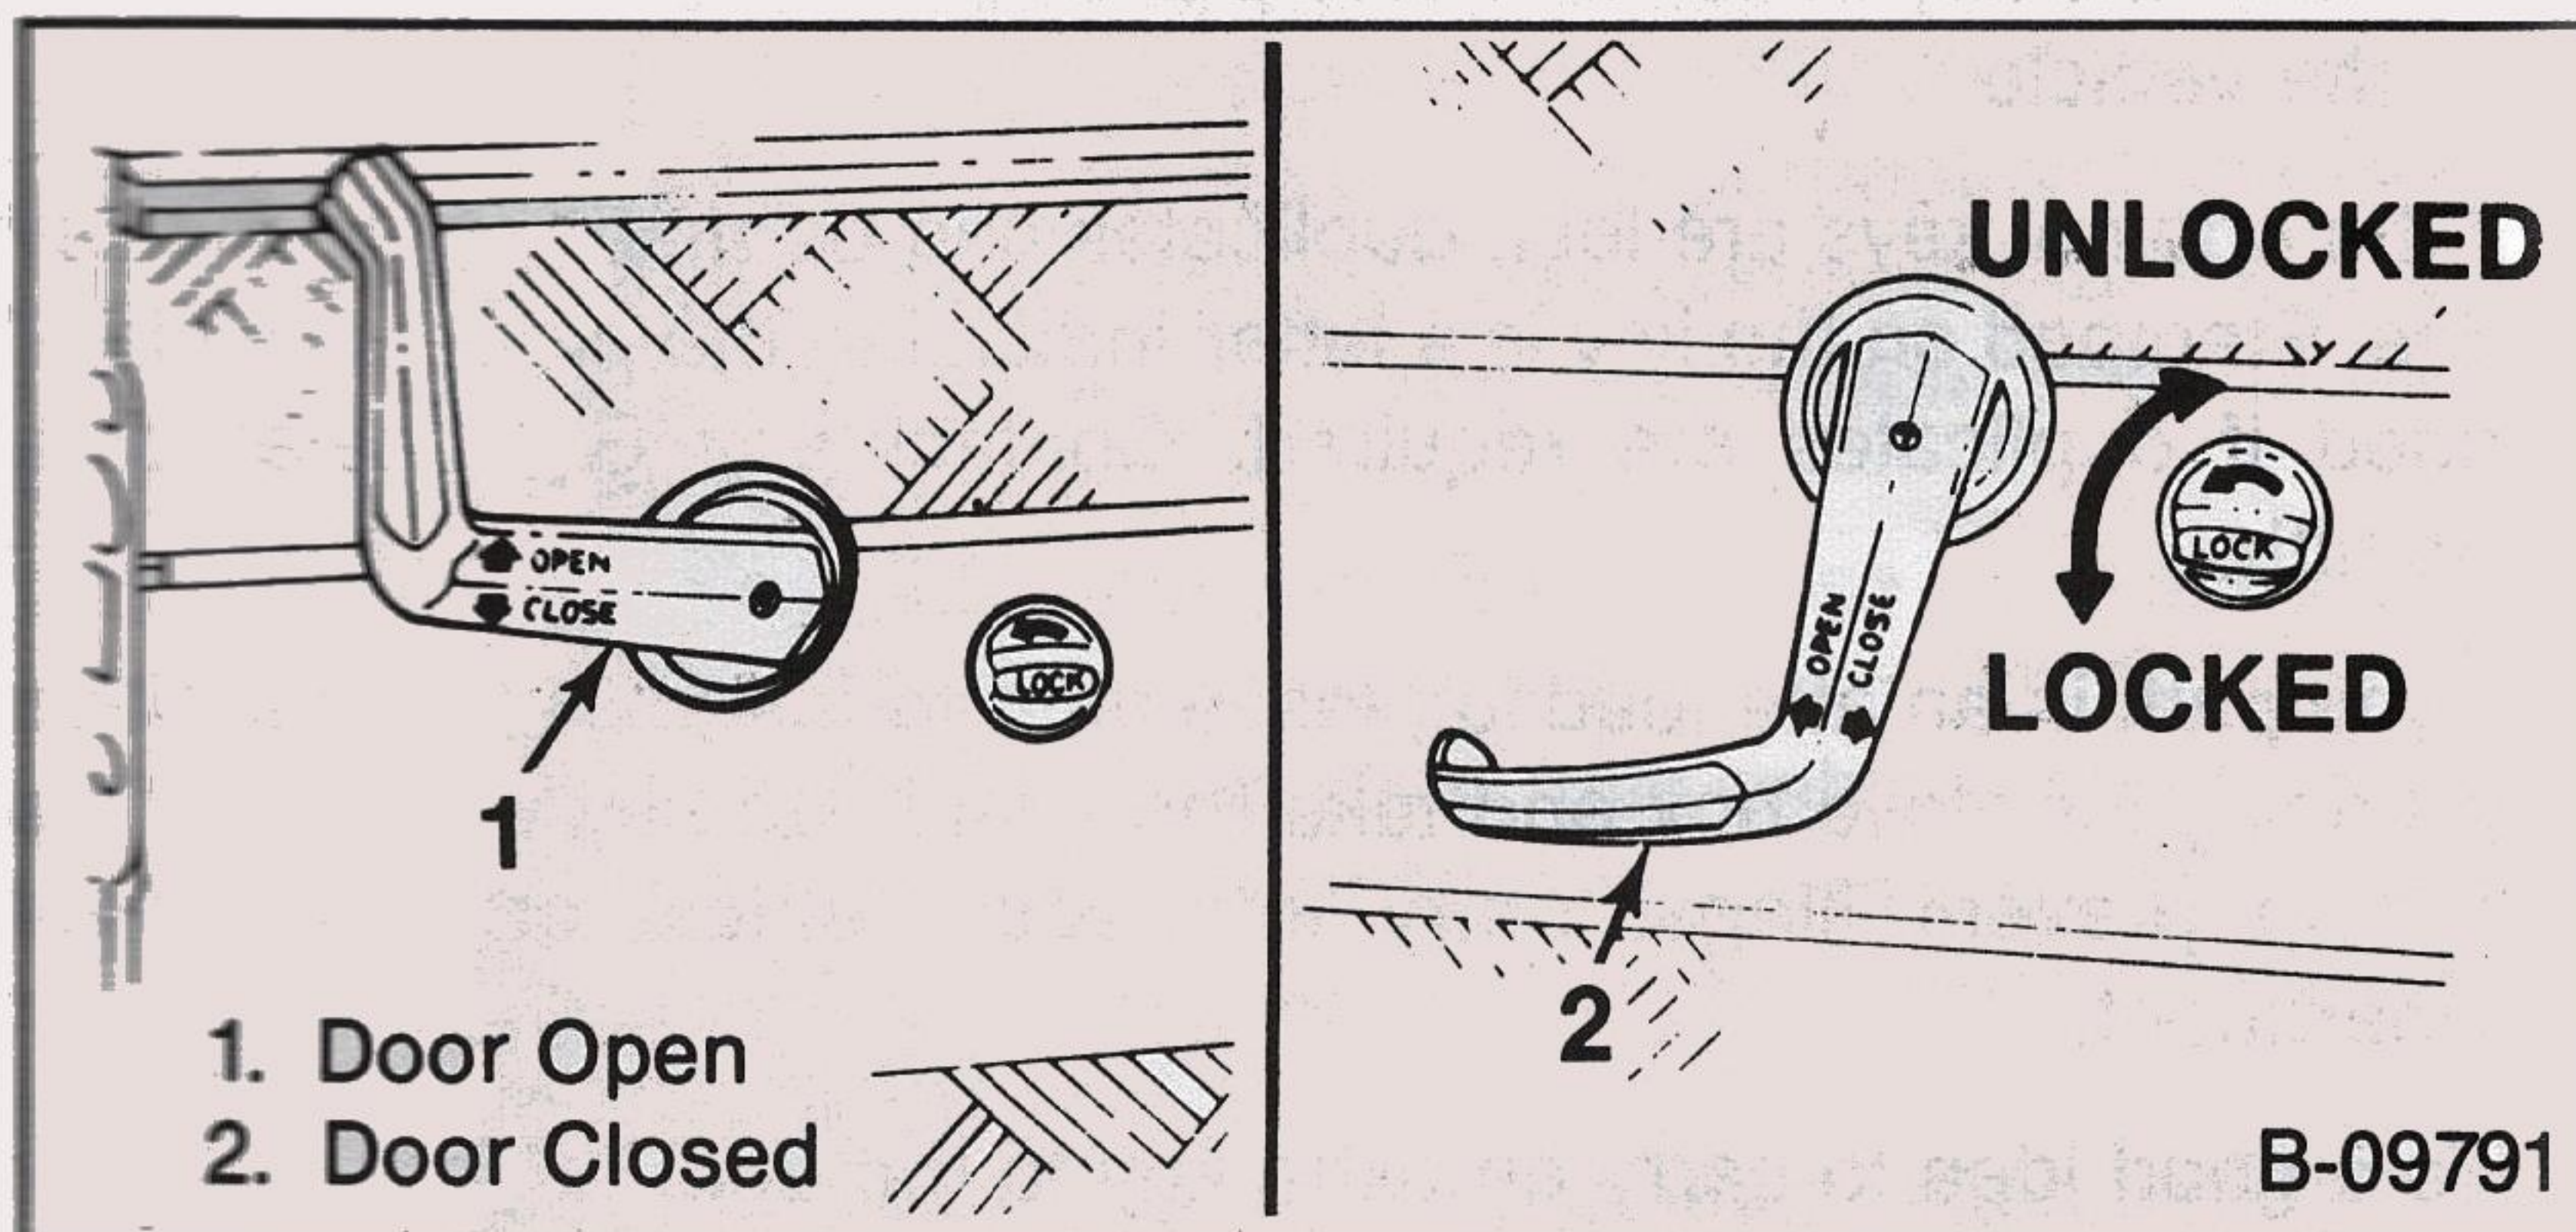

To close the door, rotate the handle slightly downward to release the hold open catch, slide the door forward until the rear latch engages and then rotate the handle downward to pull the door in against the body at the rear.


The sliding door can be locked from the inside by rotating the lock knob counterclockwise. This knob is to the right (rear) of the handle.

The door can be locked from the outside by using the key.

SWING-OUT SIDE DOORS

The optionally available swing-out doors are operated as follows:

- Open the front swing-out door — then press the door handle located on the seal-face of the rear door as shown in the illustration. When closing the doors, close the rear door first. Make certain both doors have closed and latched properly.

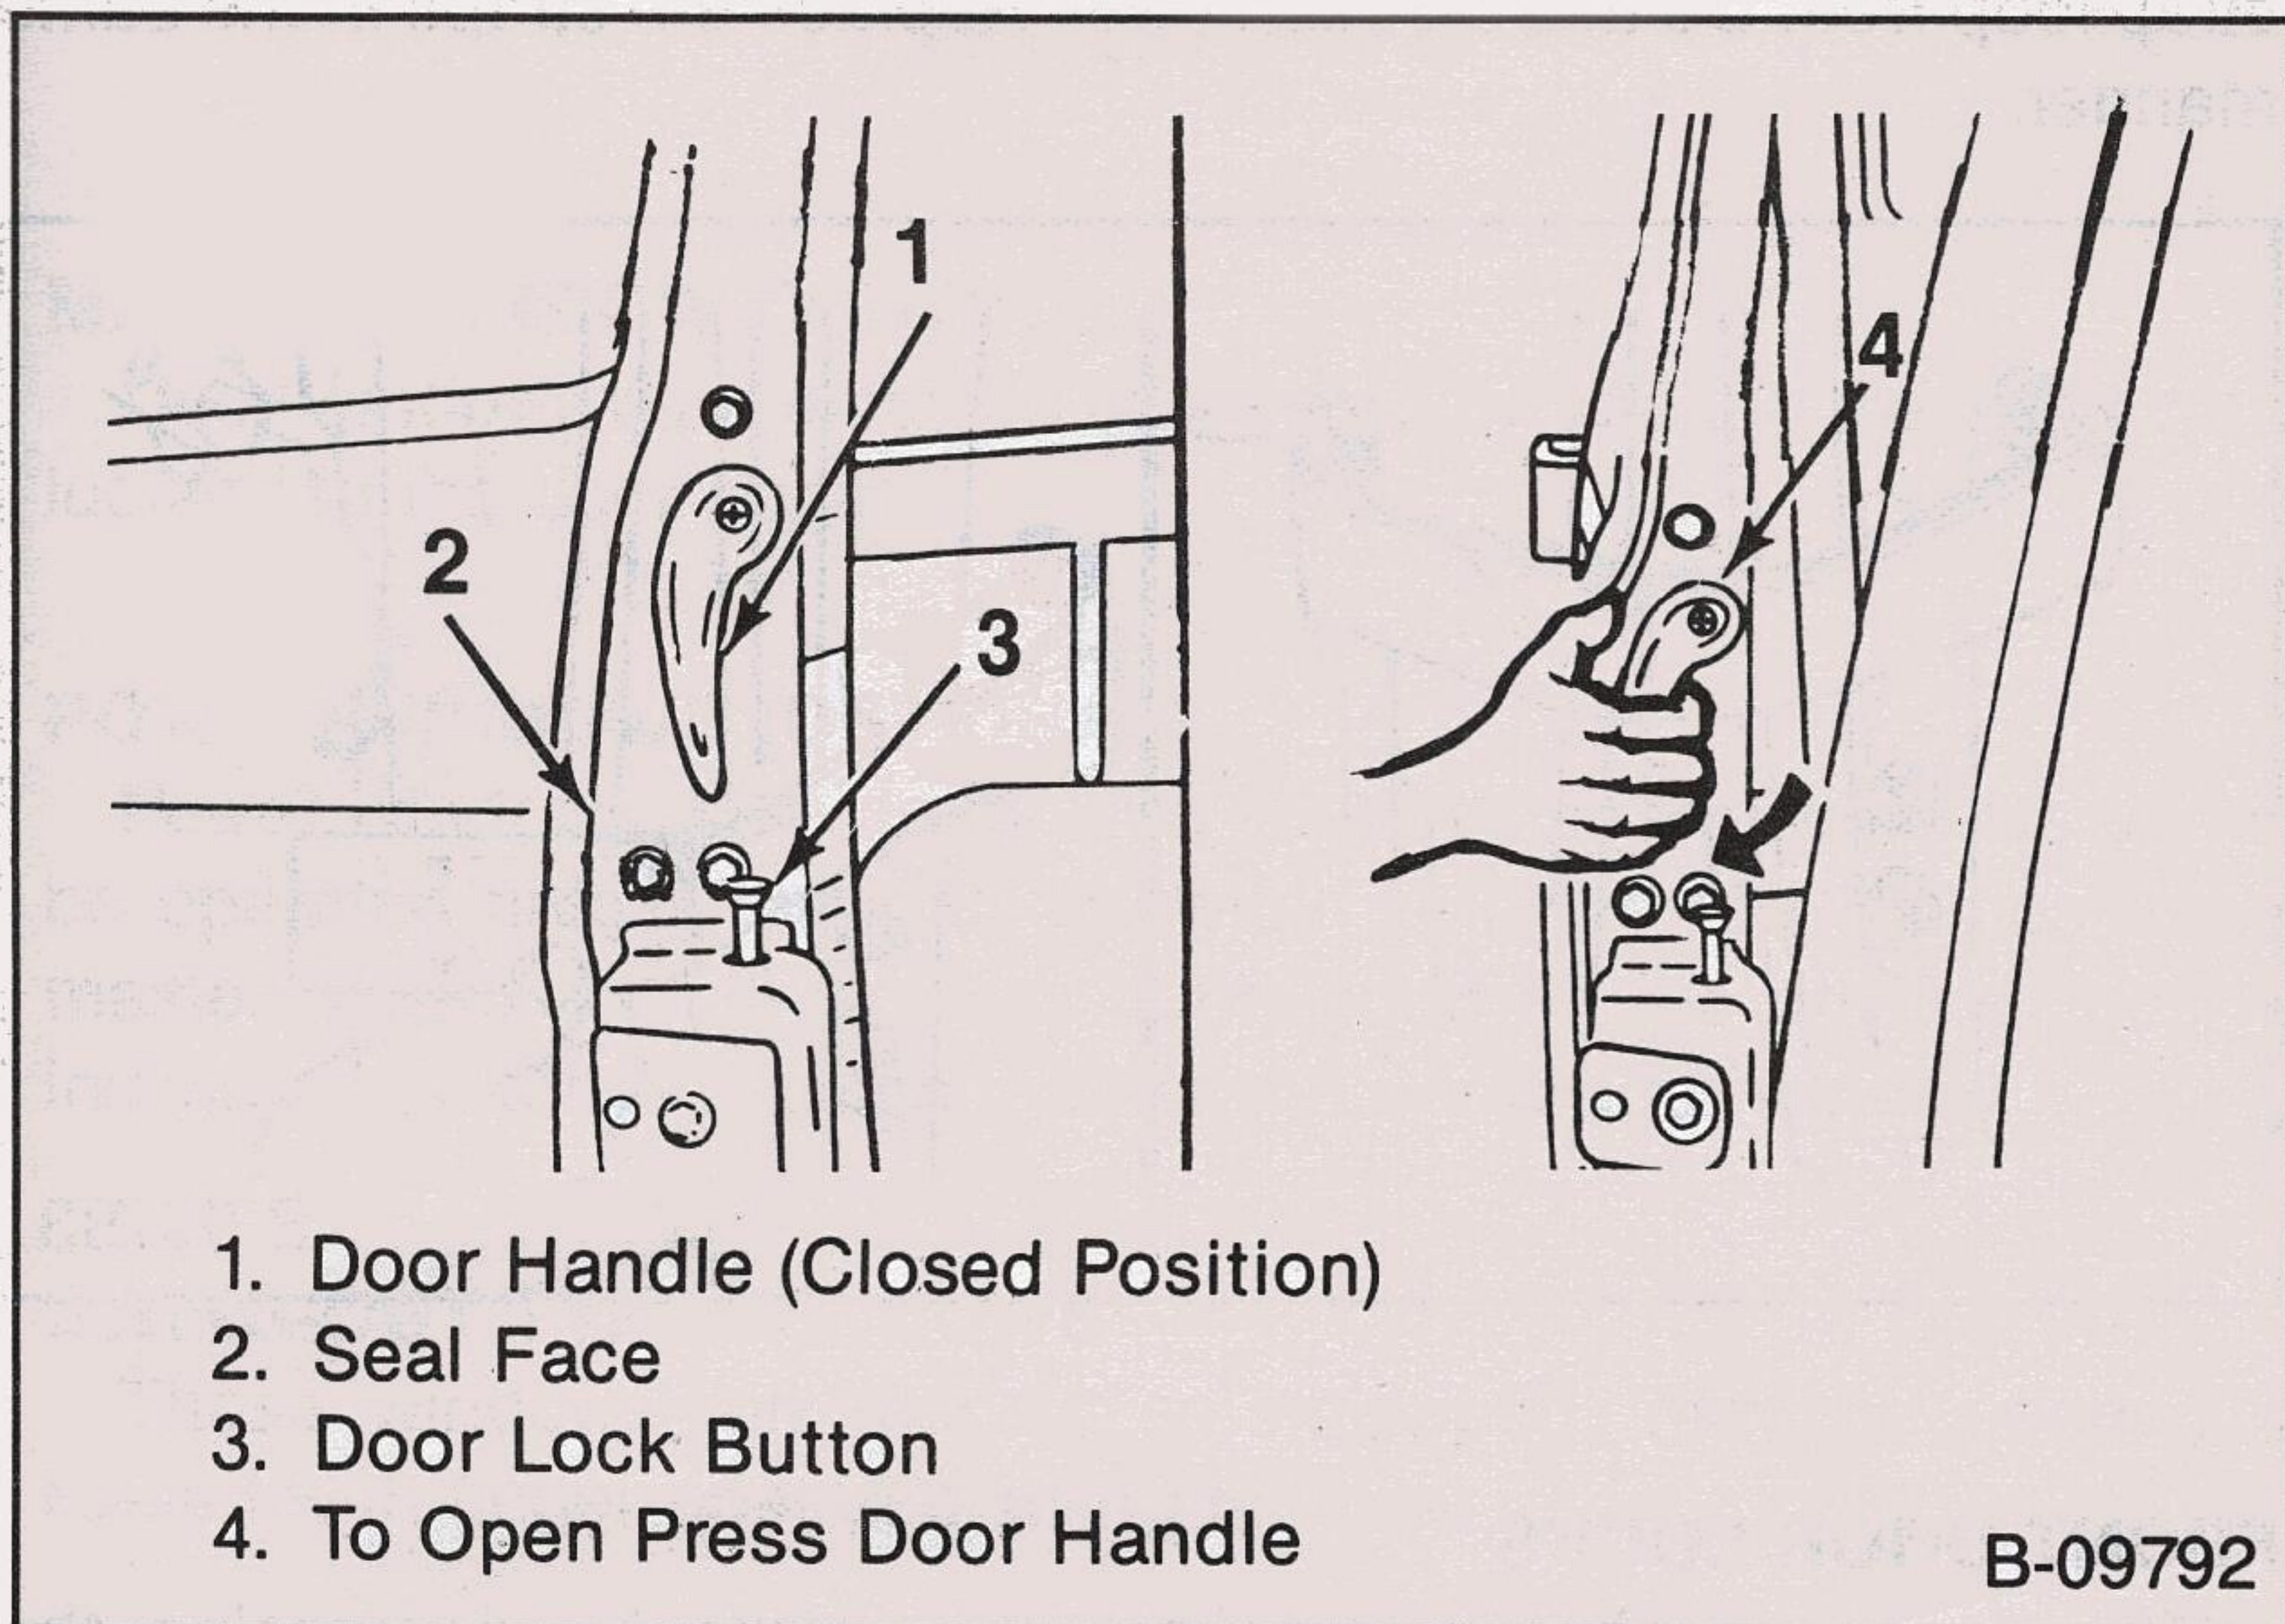

- The front swing-out door can be locked from inside the vehicle by sliding the lock lever rearward. The lever is located just below the inside door handle. The door can also be locked from the outside with the oval-head key. The rear swing-out door can be locked by depressing the door lock button located just below the door handle on the seal-face. The door can also be locked from outside the vehicle by depressing the door lock button and closing the door.


A check system is provided to keep doors from opening further than desired.

REAR DOORS

The right rear door can be locked from the outside with the oval-head key. The right rear door latch is released by pressing the button in the handle. The left rear door is opened by first opening the right rear door, then lifting the latch release lever at the lower inside corner of the door. When closing the doors, close the left door first. Firmly close the right door and make certain both doors are latched. Check straps keep the doors from opening further than desired.

To remove the check straps, close the doors slightly to remove tension from the holding pin and then lift the pin up and slide the

strap loop free. Do this on each door. Replace the straps in the same manner.

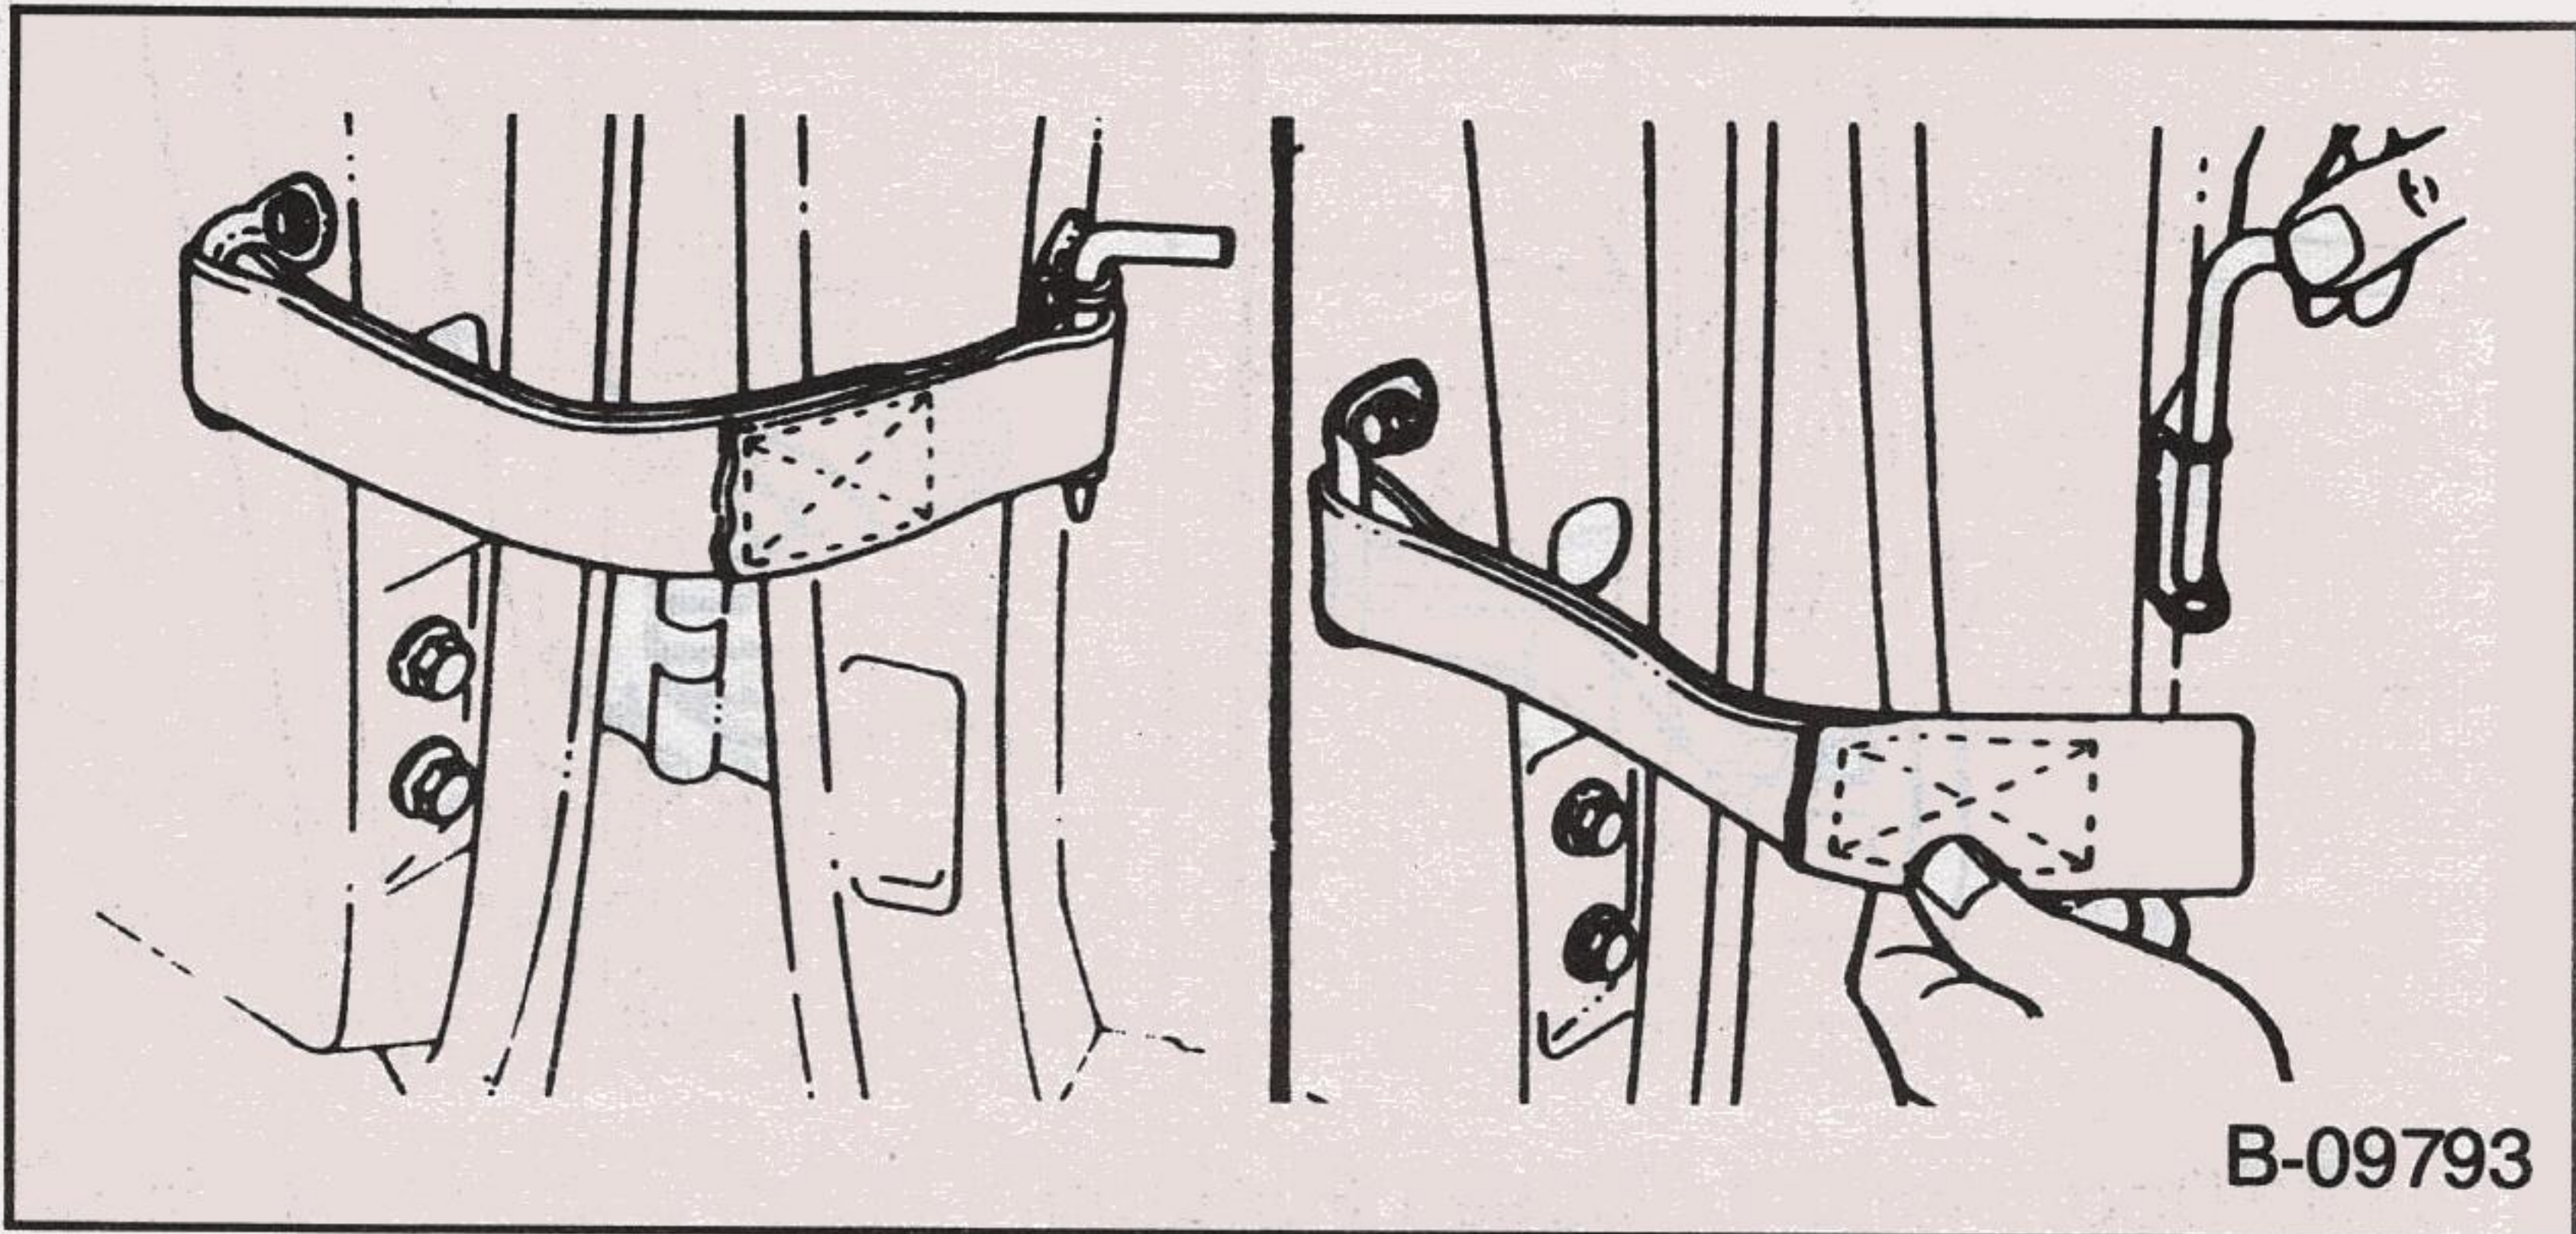

FRONT DOOR LOCKS

The doors can be locked from the inside by depressing the passenger guard door lock button located on the upper door panel. The doors can be locked from the outside by depressing the door lock button and closing the door.

The front doors can also be locked by using the oval-head key.

All models have as a standard safety feature overriding door locks. When the doors are locked, the door latch mechanism is inoperative, preventing inadvertent opening of the door by movement of the inside handle.

Power Door Locks

The optionally available power door locks allow you to lock or unlock your doors by operating the switch marked LOCK located on either door panel. The automatic locking mechanism does not interfere with manual operation of any door lock button. The doors will not unlock or open with the inside door handle when the lock button is depressed, but can be unlocked individually by lifting the lock button. The power lock will also operate the rear panel door locks.

Also note, the sliding door must be closed before operating the power door locks as the sliding door lock mechanism will not activate with the door open.

WINDOWS

MANUAL WINDOW CONTROL


Door windows can be raised or lowered by rotating the hand crank located in the door panel.

POWER WINDOWS (OPTIONAL)

Power windows have an ignition interlock so the windows cannot be operated unless the ignition switch is in the "RUN" position. A master control for all windows is provided on the driver's door. An individual switch is provided under the passenger window.

SWING-OUT TYPE WINDOWS


These windows, on models so equipped, may be opened or closed with finger operated swing latches.

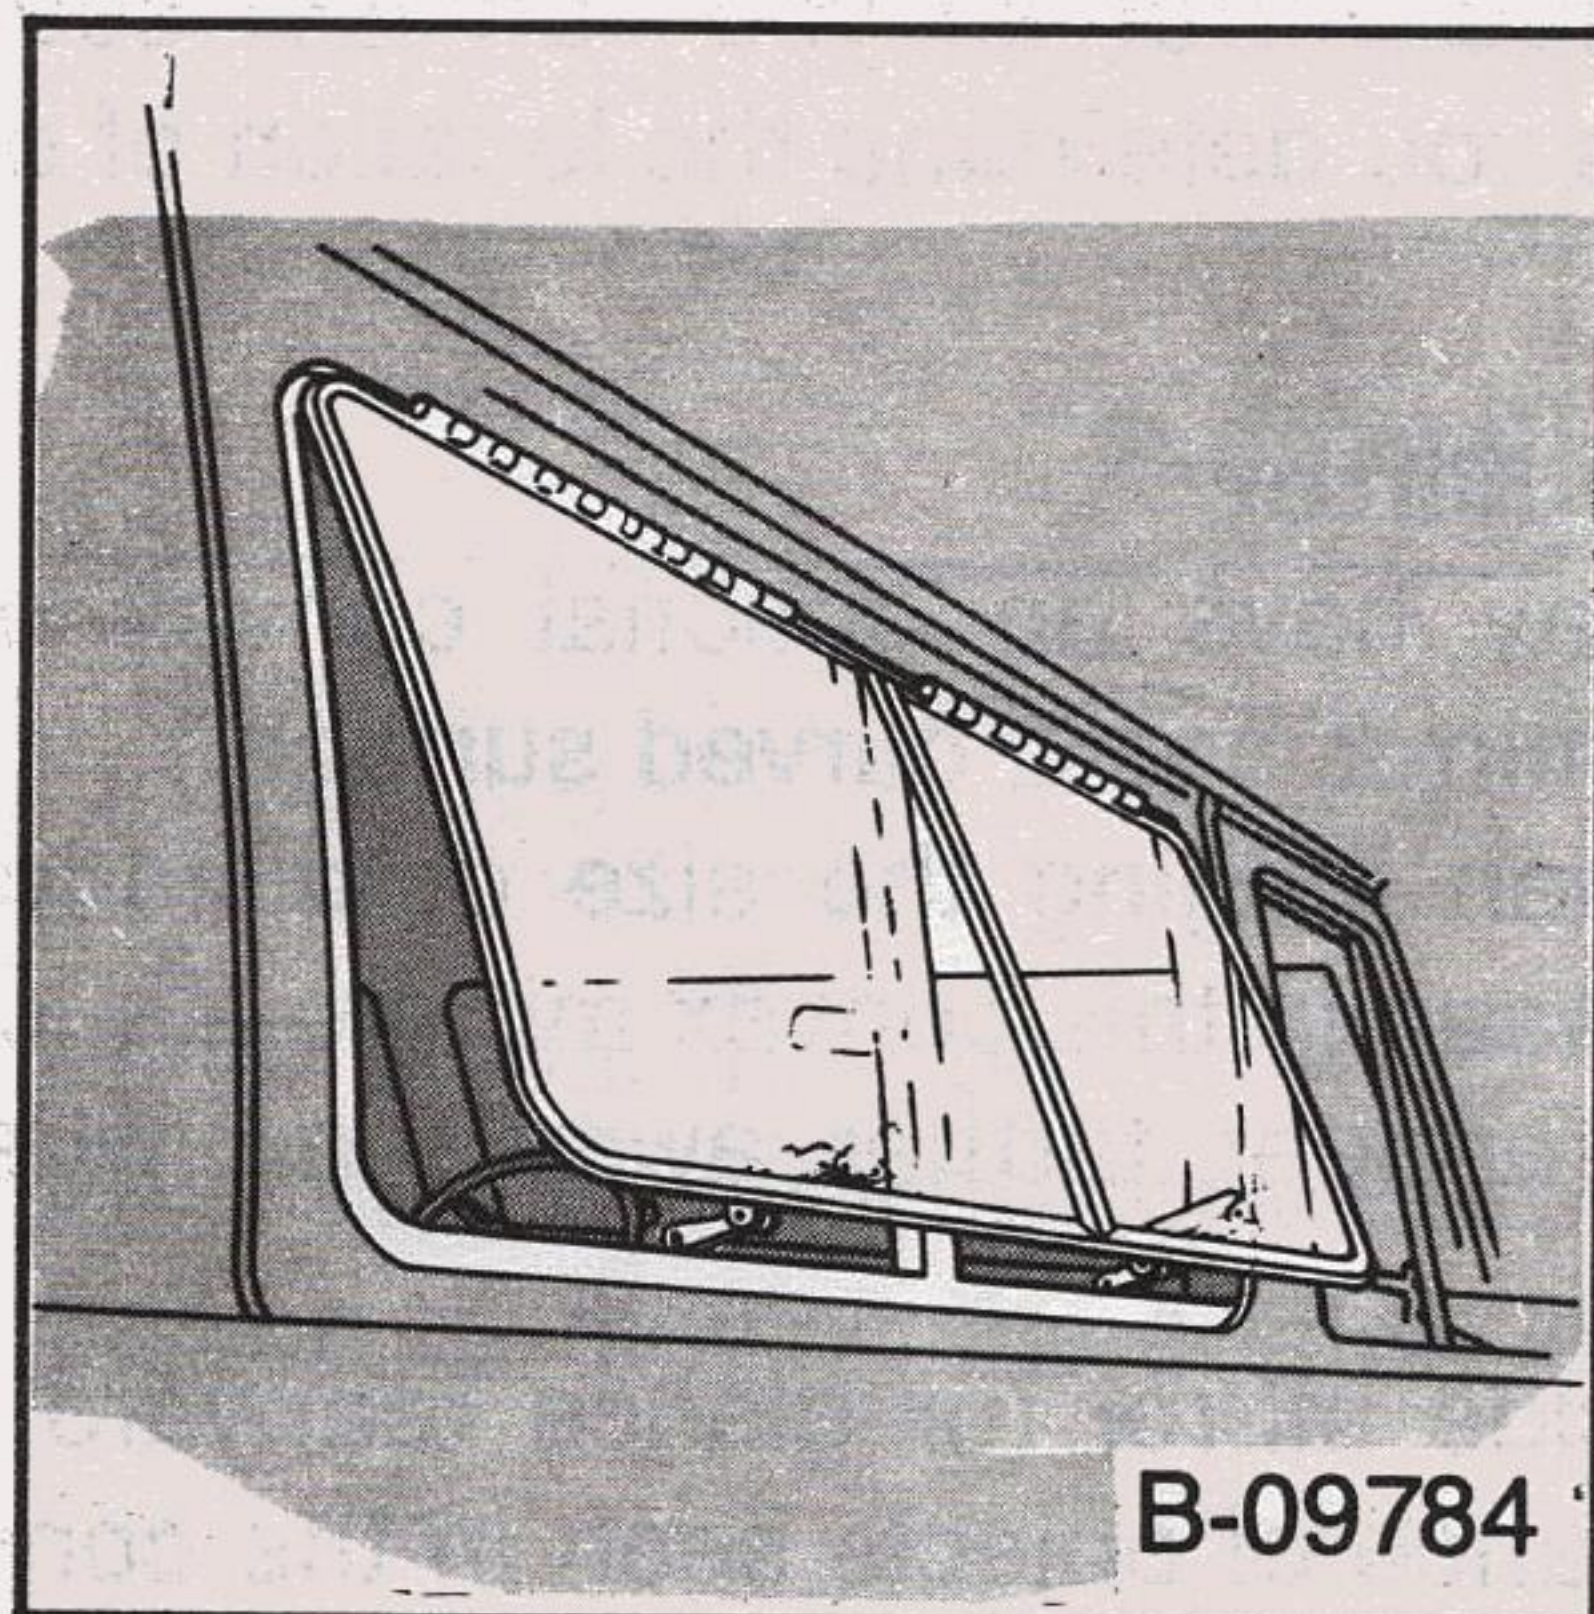

If it is desired to drive with a rear window open, see also "Engine Exhaust Gas Caution (Carbon Monoxide)" in the Starting and Operating Section of this manual.

MIRRORS

Inside Rearview Mirror

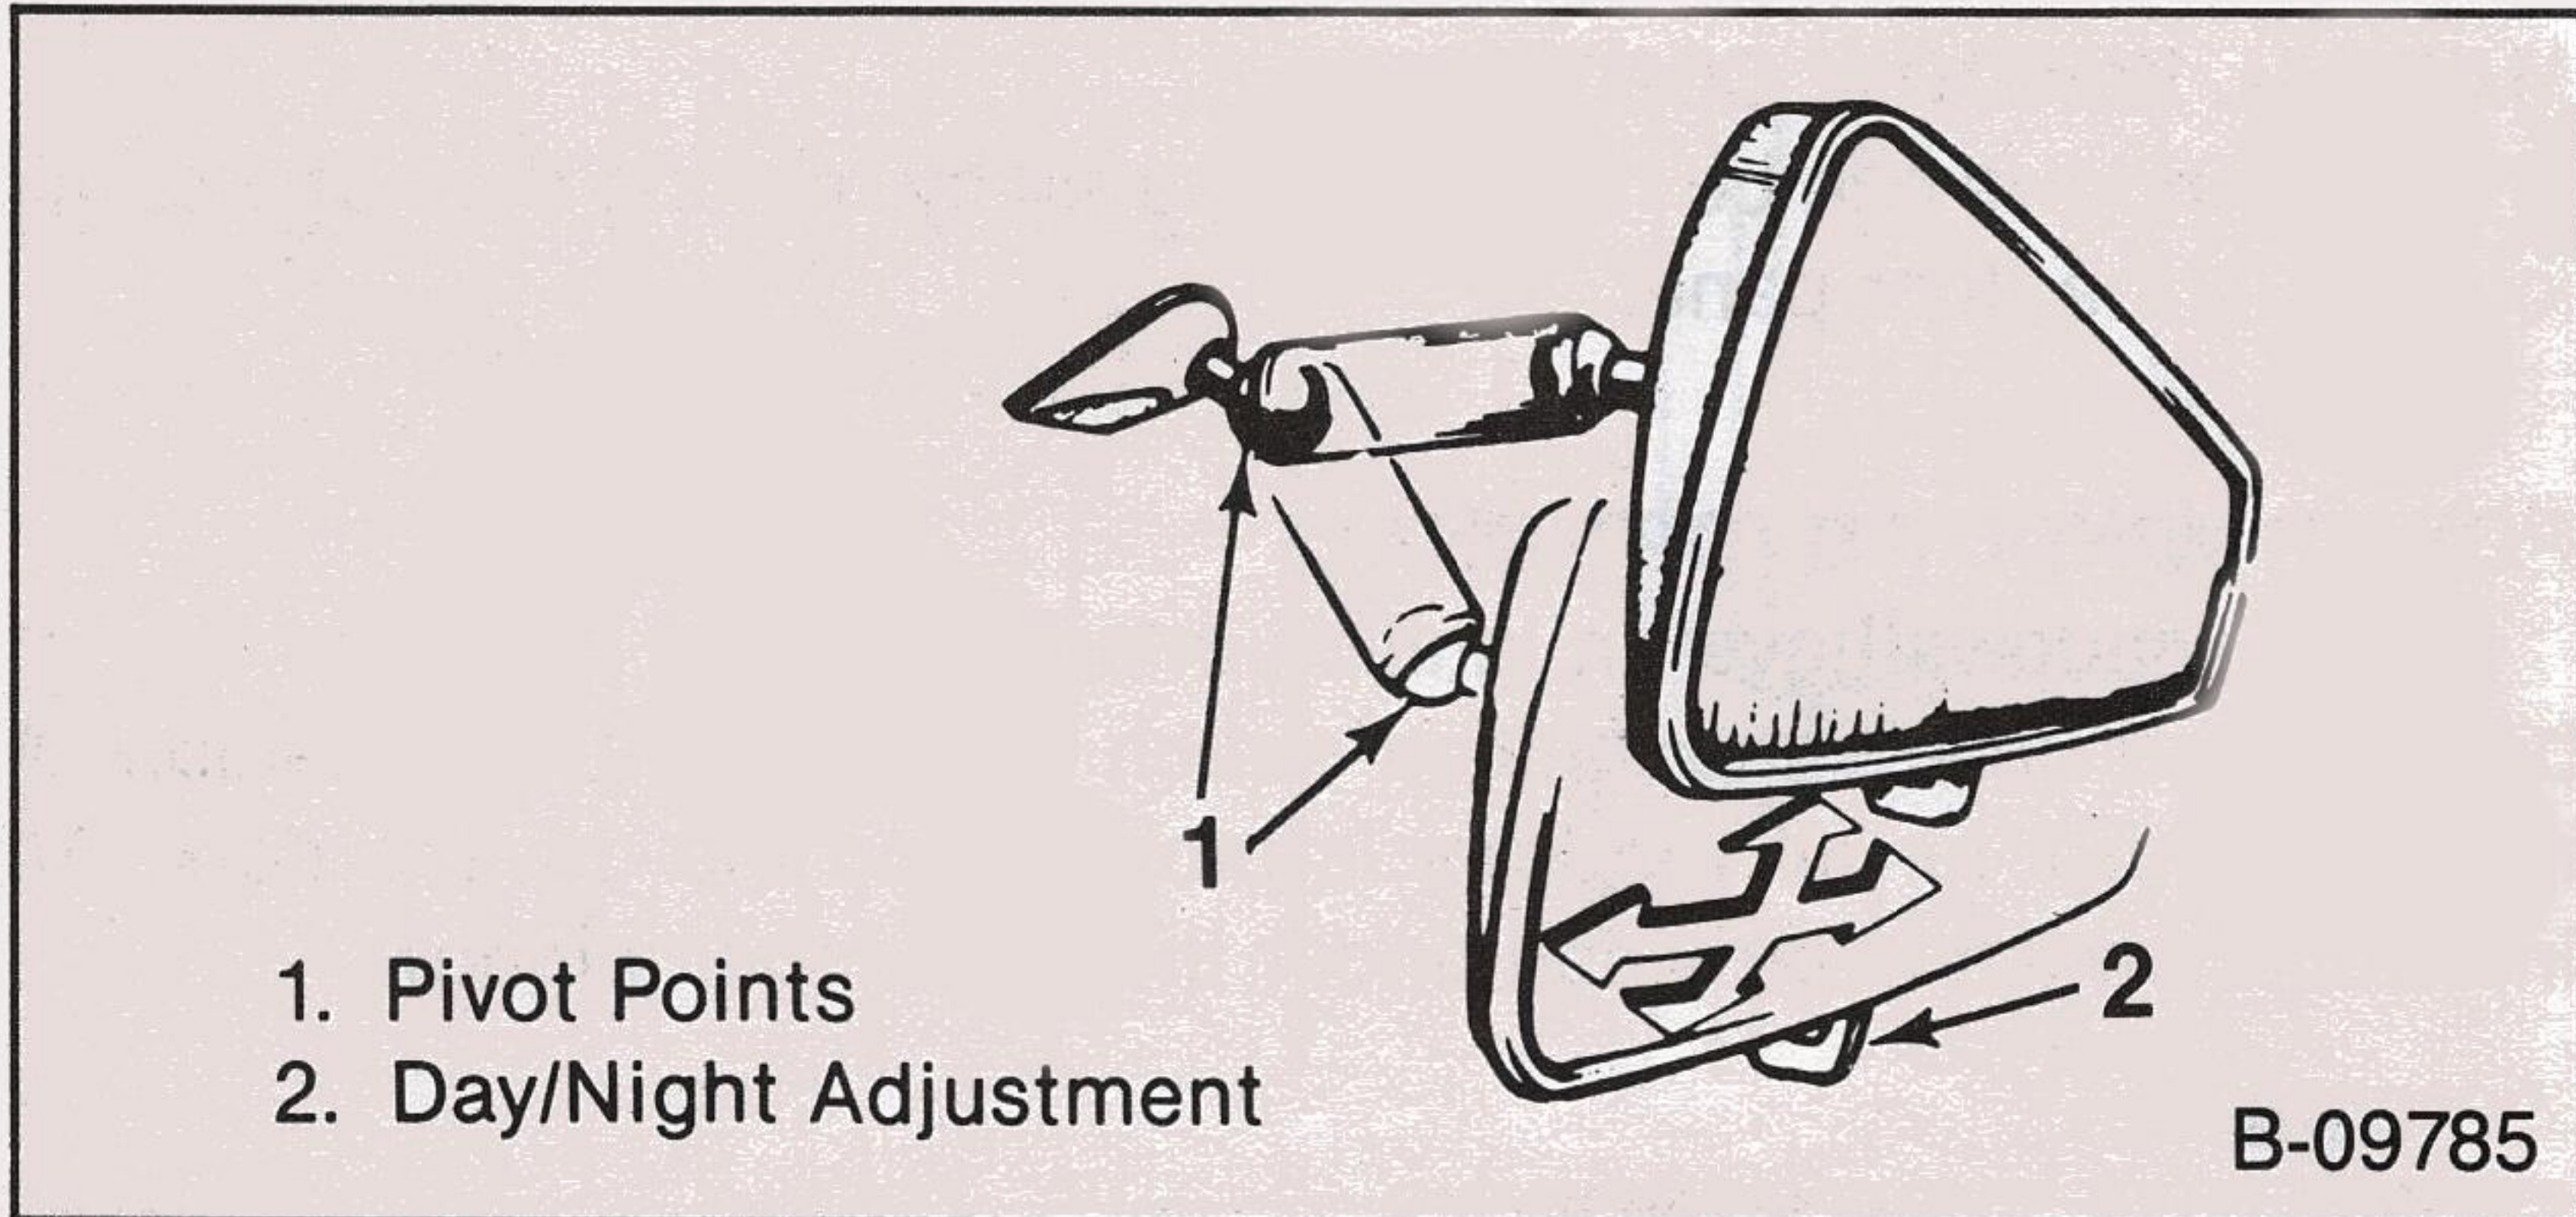

Outside Rearview Mirror(s)

Adjust the outside mirror so you can just see the side of your vehicle. This helps you determine the location of objects seen in the mirror.

Convex Rearview Mirror

Your vehicle may have an optional convex outside right-hand mirror. (A convex mirror has a curved surface.)

- Use care when judging the size or distance of a vehicle or other object seen in this convex mirror — such objects will look smaller and appear farther away than when seen in a flat mirror.
- Use your inside mirror (or glance rearward) to determine the size and distance of objects seen in the convex mirror.
- Adjust the mirror so you can just see the side of your vehicle.

SEAT CONTROLS


Adjust Driver Seat While Parked

CAUTION: Do not adjust the driver's seat while the vehicle is moving. The seat could move suddenly and cause the driver to lose control of the vehicle.

Bucket Seats

The front seats may be adjusted forward or rearward by moving the control lever at the front of the seat. Move the control lever to the left to release the locking mechanism; then exert slight body pressure to move seat to the desired position. Release the lever to lock the seat into position.

After adjusting the seat, push it back and forth to be sure it will not move. Take the vehicle to your dealer for service if either seat adjuster does not latch.

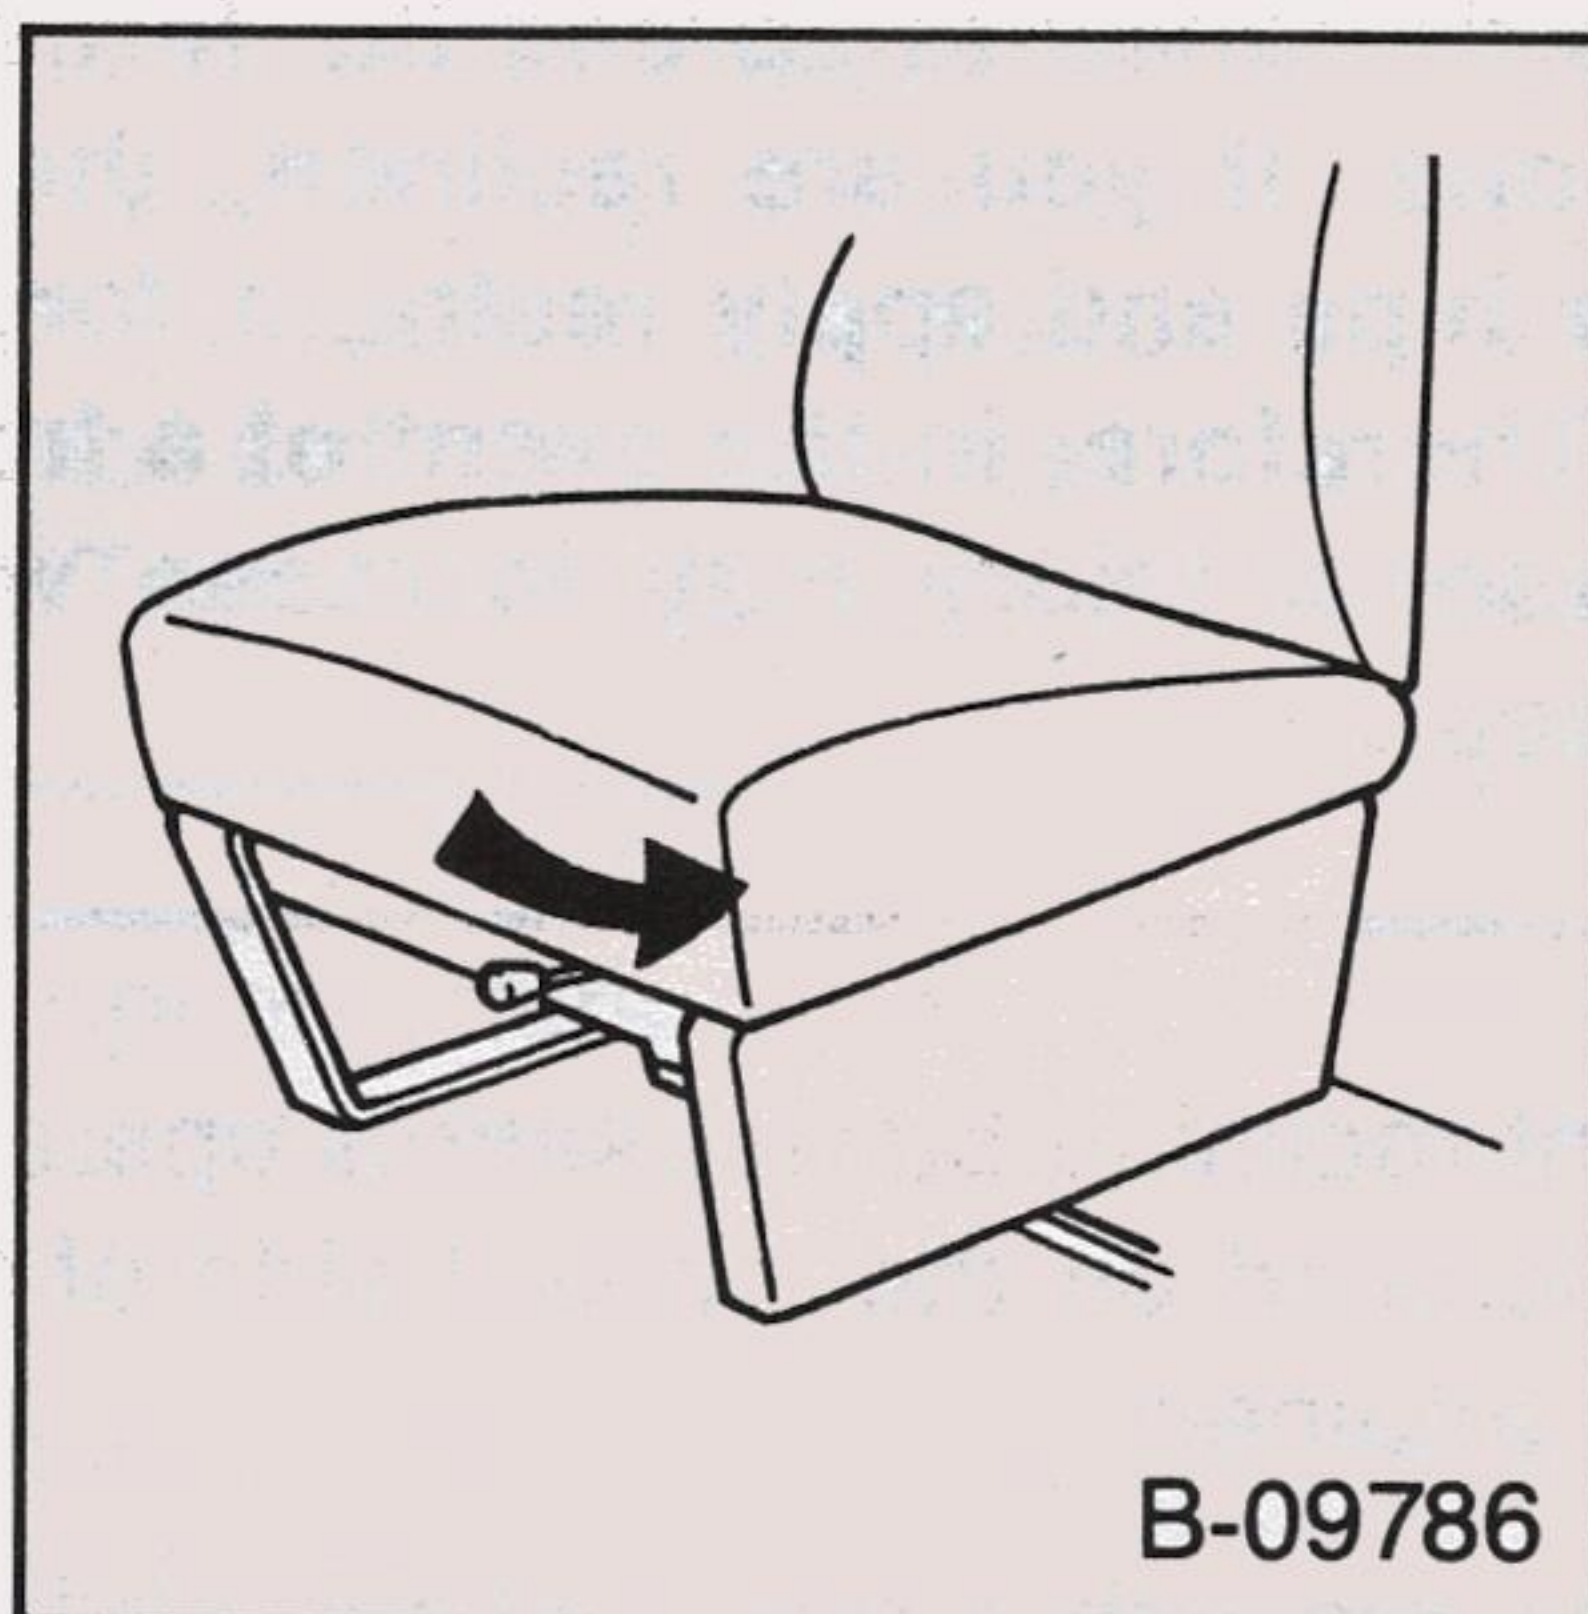

Passenger's Seat

An optional passenger's seat may be mounted to the right of the engine cover. The seat can be moved forward or rearward to the most comfortable position by moving the control lever at the front of the seat.


RECLINING BUCKET SEAT (OPTIONAL)

Seatback Position When Moving

CAUTION: To reduce the risk of sliding under the lap belt during a collision, an occupied reclining seat should not be reclined any more than needed for comfort. The seatback and seat belts provide best restraint **ONLY** when the rider is sitting well back and straight up in the seat. (The lap belt is designed to spread the force of a collision over the hip-bone. If you are reclined, the lap belt may slide past your hips and apply restraint forces directly to the abdomen. Therefore, in the event of a frontal collision, the risk of personal injury may increase with increasing recline of the seatback.)

The optional front reclining bucket seat is operated by turning the adjustment knob, located on the inboard side of the seat, until the desired position is attained.

The angle of the moveable arm rest may be adjusted for your comfort by turning the Phillips head screw which is located at the rear of each arm rest between the arm rest and the seat.

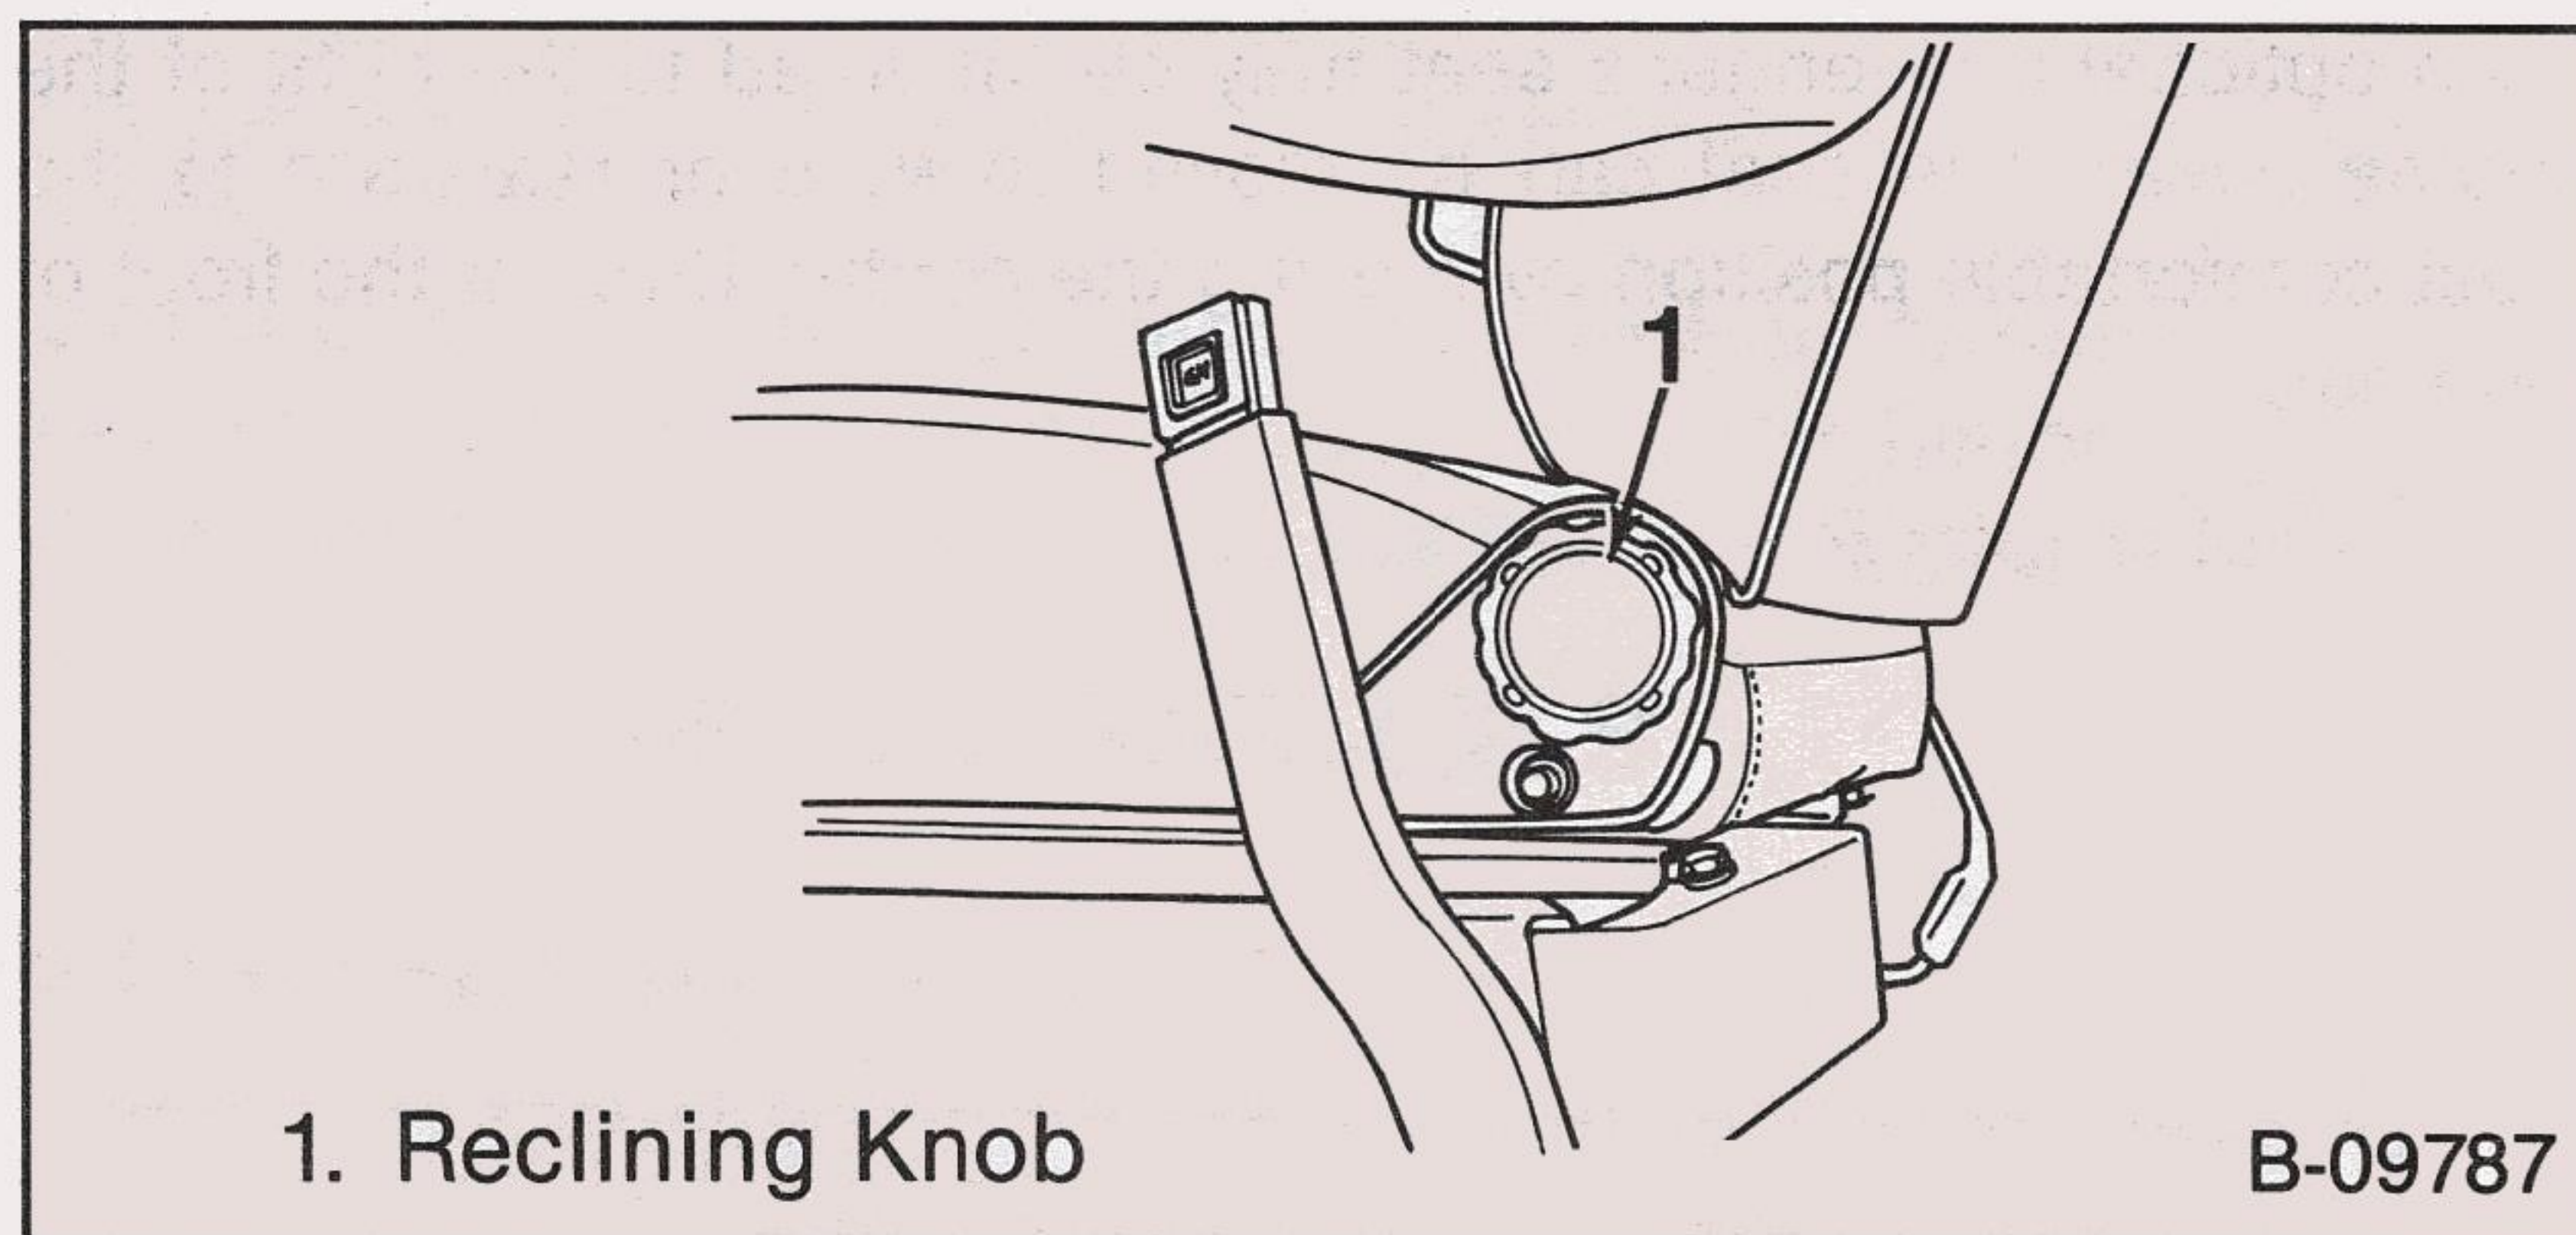

TRAVEL BED

CAUTION: To reduce the risk of sliding under the lap belt during a collision, do not use the Travel Bed in its reclined position while the vehicle is moving. In its bench seat position, the Travel Bed and its seat belts provide best restraint only when the rider is sitting well back and straight up in the seat. The lap belt is designed to spread the force of a collision over the hipbone. If you are reclined, the lap belt may slide past your hips and apply restraint forces directly to the abdomen. Therefore, in the event of a frontal collision, the risk of personal injury may increase if the Travel Bed is used in the reclined position.

The Travel Bed option offers either comfortable sleeping facilities or can be folded to provide an additional bench seat, with ample cargo space behind it.

The following instructions are to acquaint you with the operation of the Seat/Travel Bed Controls.






To Make Into Bed

1. Relieve pressure on latches by pulling the seat backrest forward while pushing foot operated lever inward to release backrest extension frame.
2. Move folding backrest and hinged extension rearward to form bed.
3. Place seat belts in crevice between seat cushion and backrest.

To Make Into Bench Seat

1. Reach in between seat backrest and seat cushion and place all seat belts on seat cushion.
2. Grasp backrest extension and move the seat backrest, forward to full upright position.
3. Be certain that seat back extension is securely latched when it is in the stowed (vertical) position.

The Travel Bed can be removed and reinstalled in the same manner as the second seat in your vehicle.

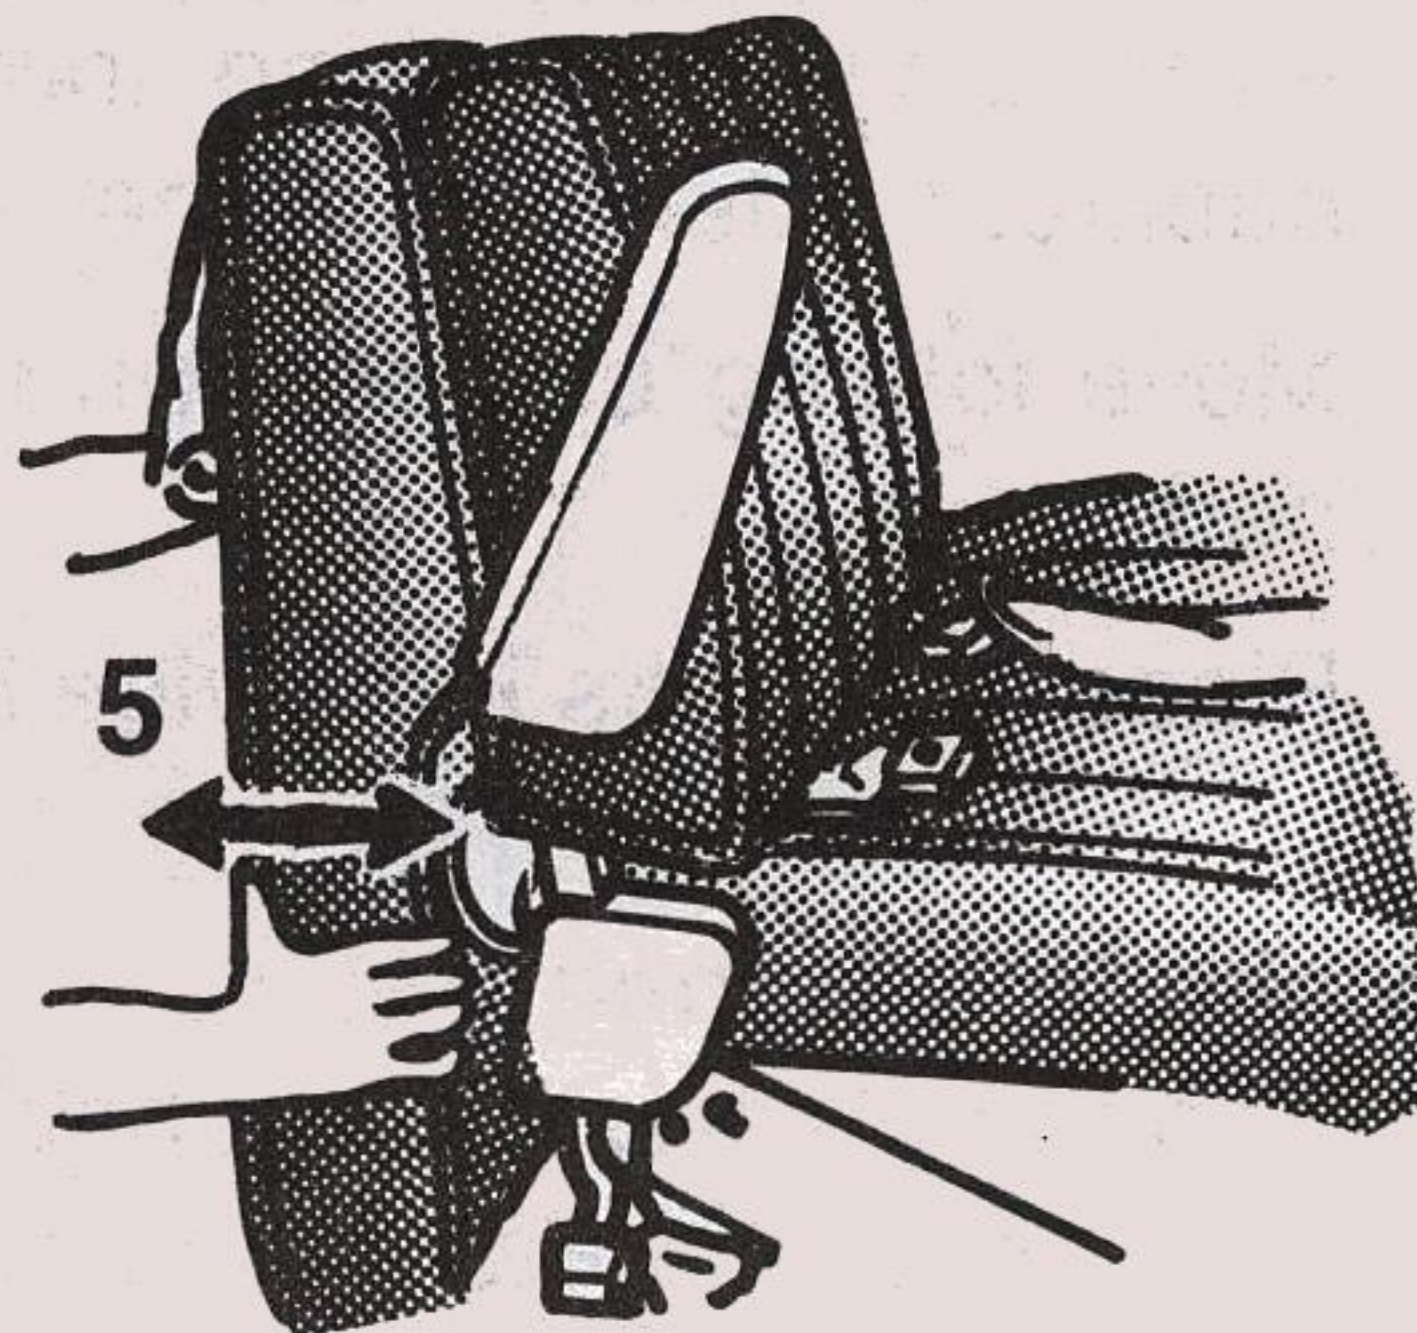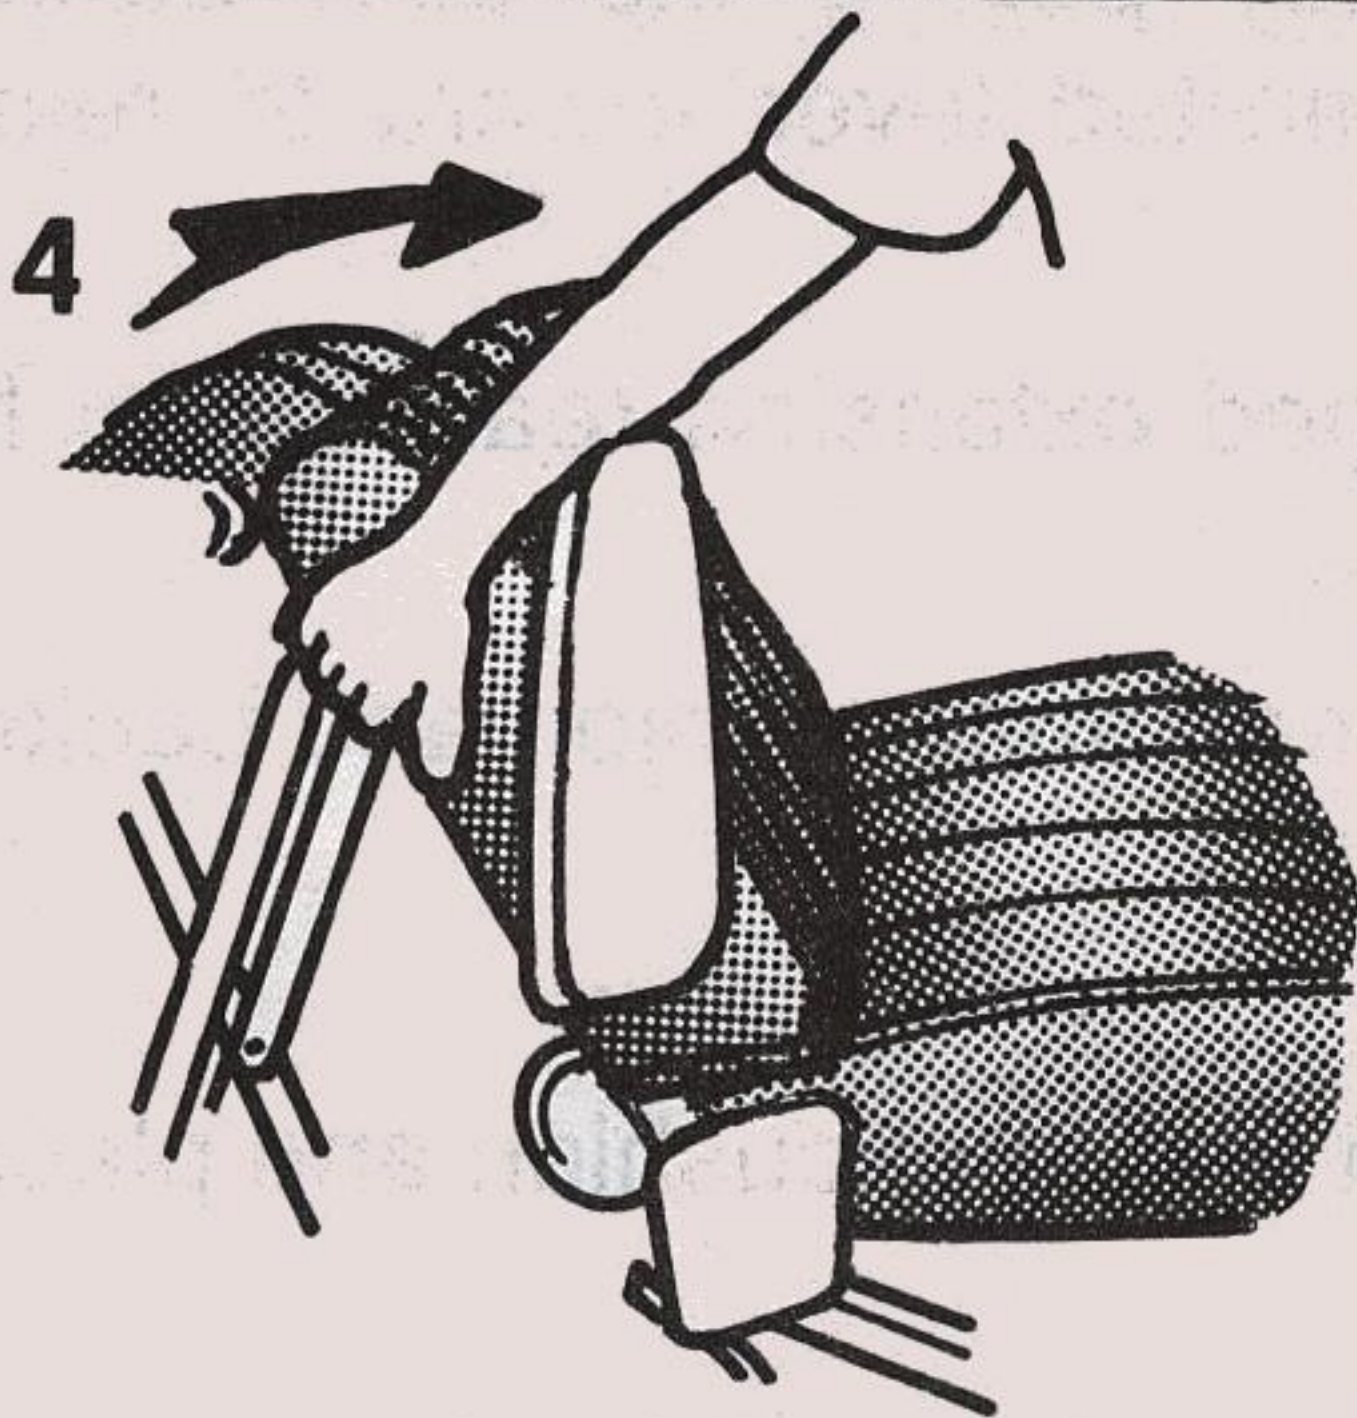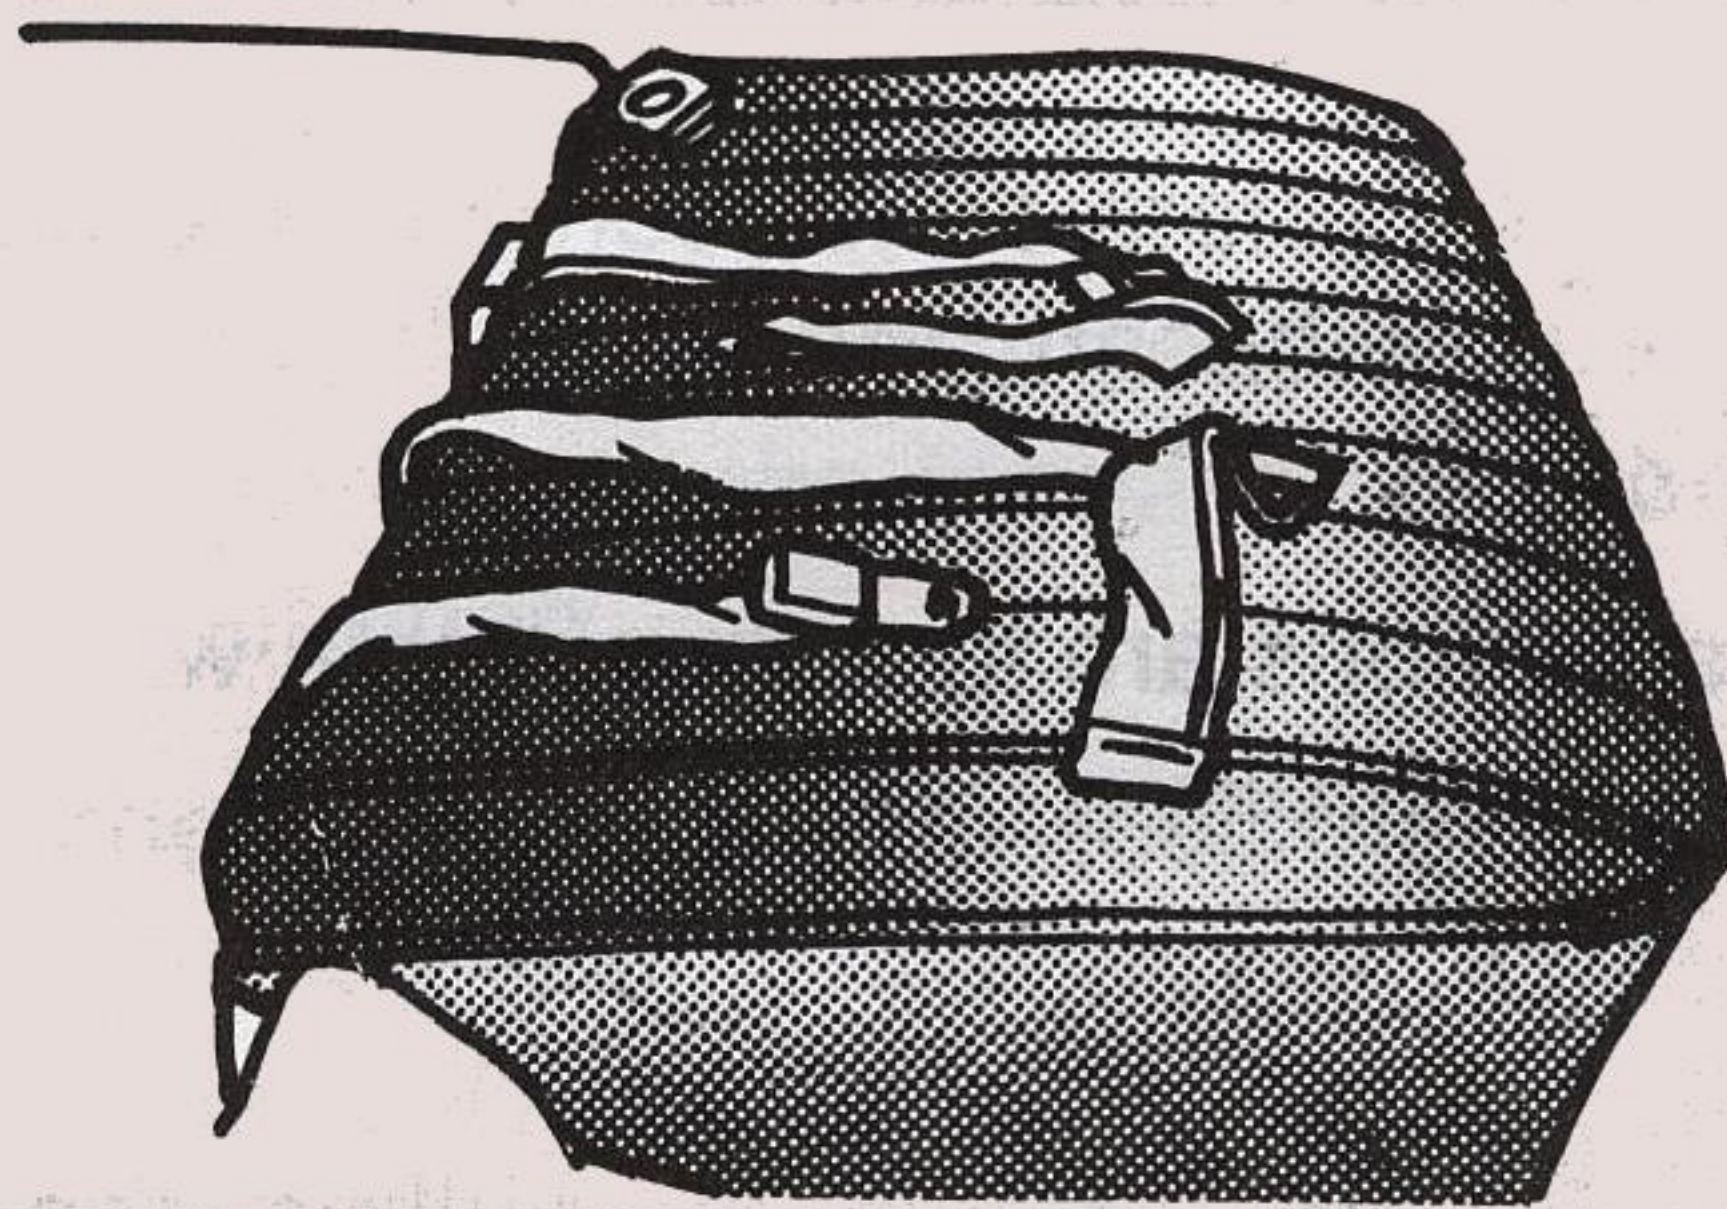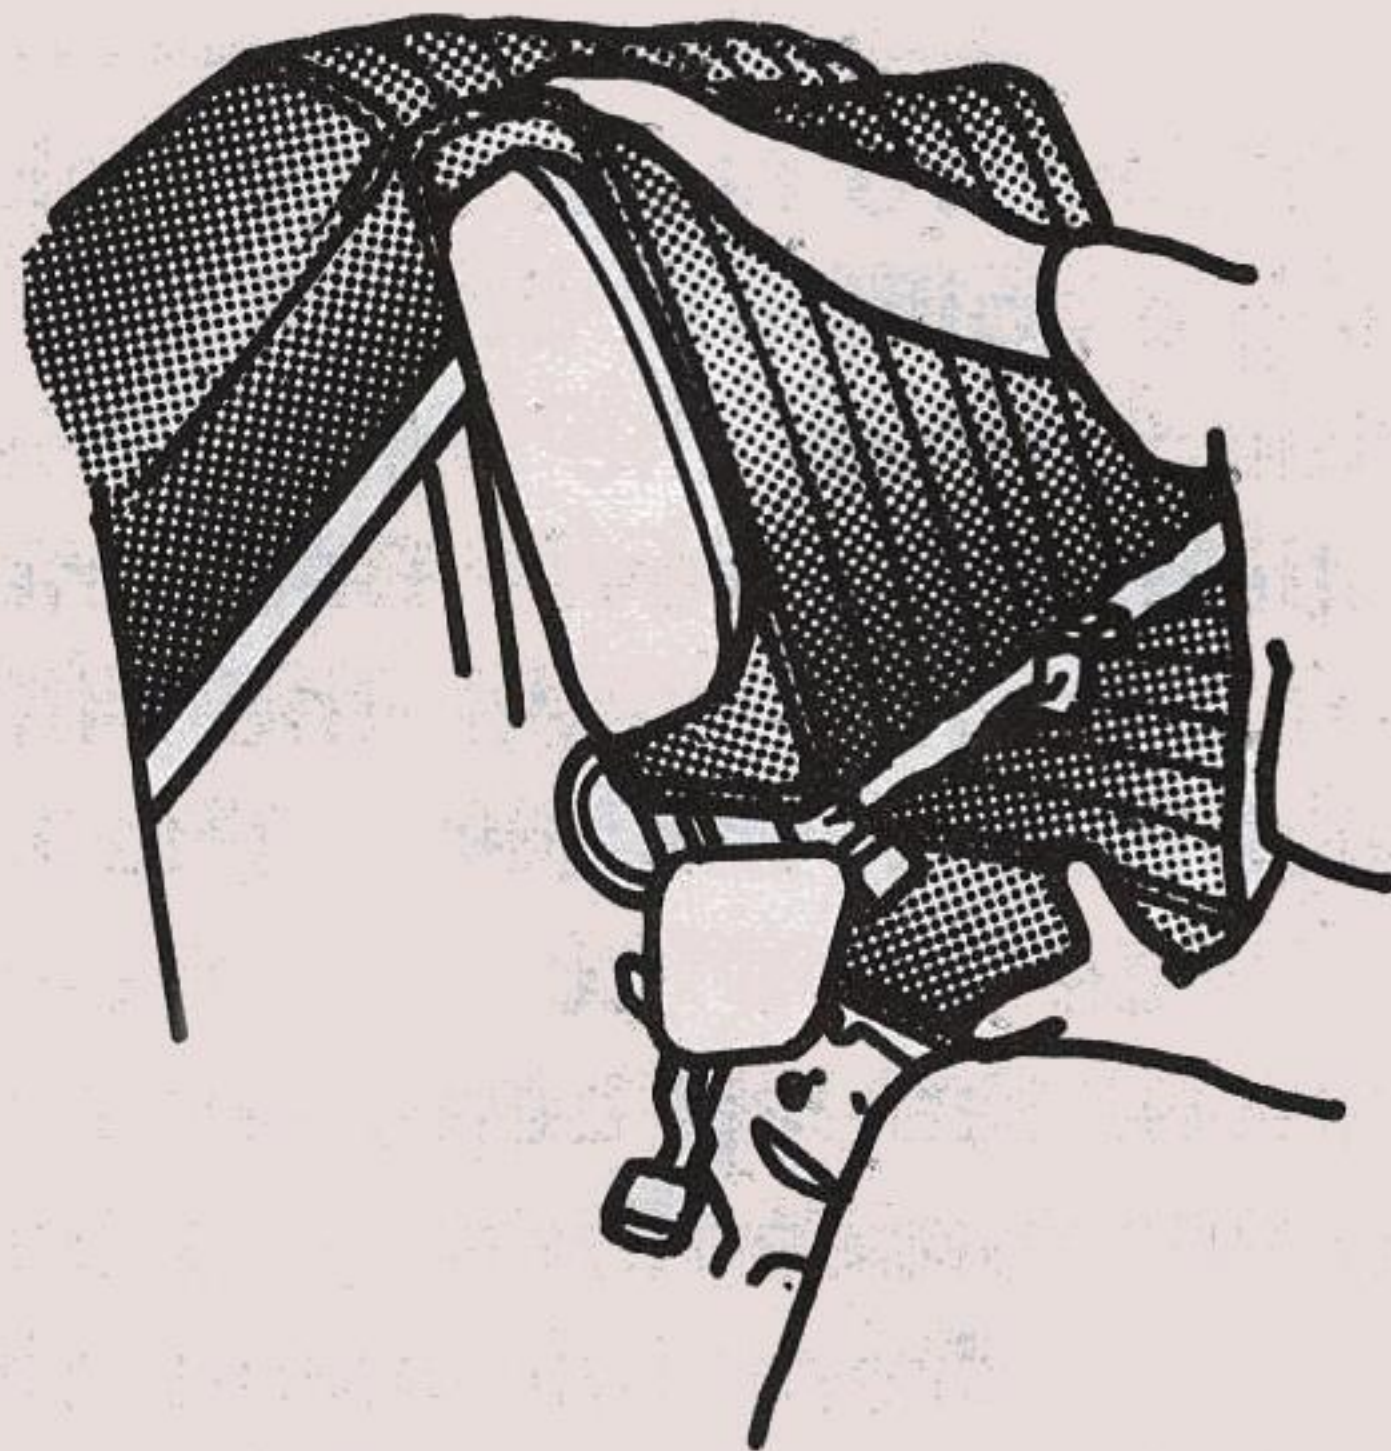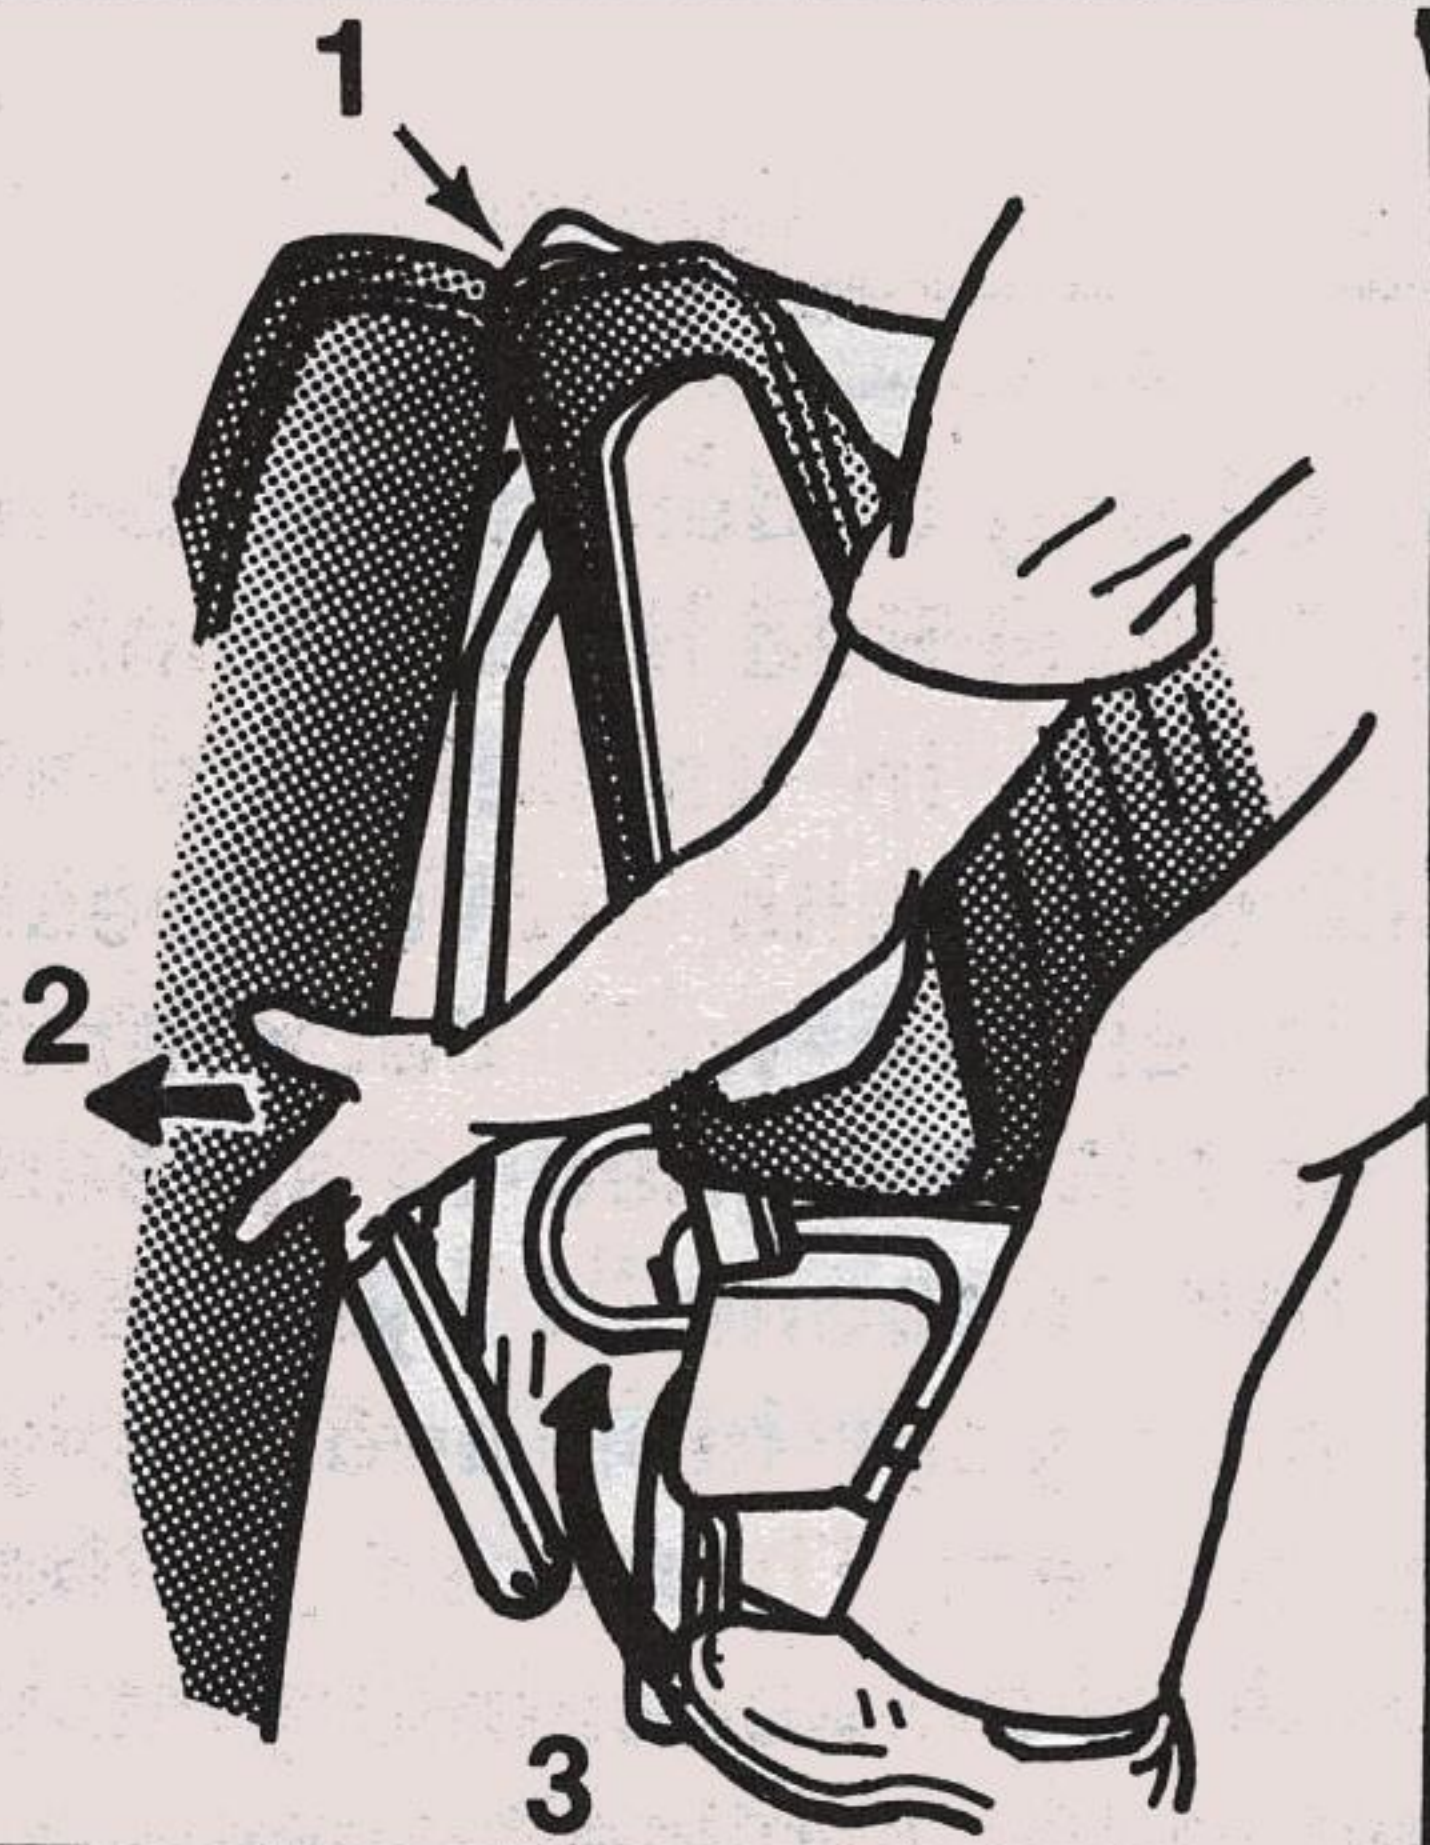

1. Relieving Pressure On Latches
2. Releasing Hinged Extension
3. Push Release Lever Inward
4. Move Forward
5. Make Sure Backrest Extension Is Securely Latched

B-09788

SECOND, THIRD AND FOURTH SEATS

Always Check The Seat

CAUTION: Follow all installation instructions when putting the quick-removable seat back in. After putting in the seat, always check to see that it is firmly latched to the floor at both front and rear by pushing back and forth on the seat. Failure to latch the seat securely to the floor could increase the risk of personal injury in an accident.

Each optional bench seat is fastened to the floor by two cam-type latch assemblies and hooked retainers. Cam-type latch assemblies and hooked retainers fit onto anchor pins in floor anchor plates. When the latch assemblies are depressed, their cams and the hooks of the retainers are drawn onto the anchor pins for seat attachment. When unlatched, the seats can be quickly removed.

When re-installing each seat, take care that the front latches and rear retainers are fully seated on the anchor pins and that the front latches are fully secured.

SEAT BELT SYSTEMS


CAUTION: To help reduce the risk of personal injury in collisions or sudden maneuvers use the seat belts following the instructions in this section on their proper use, maintenance, and application with child restraint systems. This includes pregnant women; pregnant women should select a seat with a lap-shoulder belt whenever possible.

NEVER:

- Put the lap portion of a seat belt over any armrest.
- Wear a shoulder belt under your arm nearest the door.
- Use a belt for more than one person at a time.
- Wear the belts twisted.
- Let the belt system become damaged by a door or seat.

FRONT SEAT LAP-SHOULDER BELT

1. Adjust the seat as needed and sit well back and straight up. Then pull the belt across your lap and push the latch plate into the buckle until it clicks.

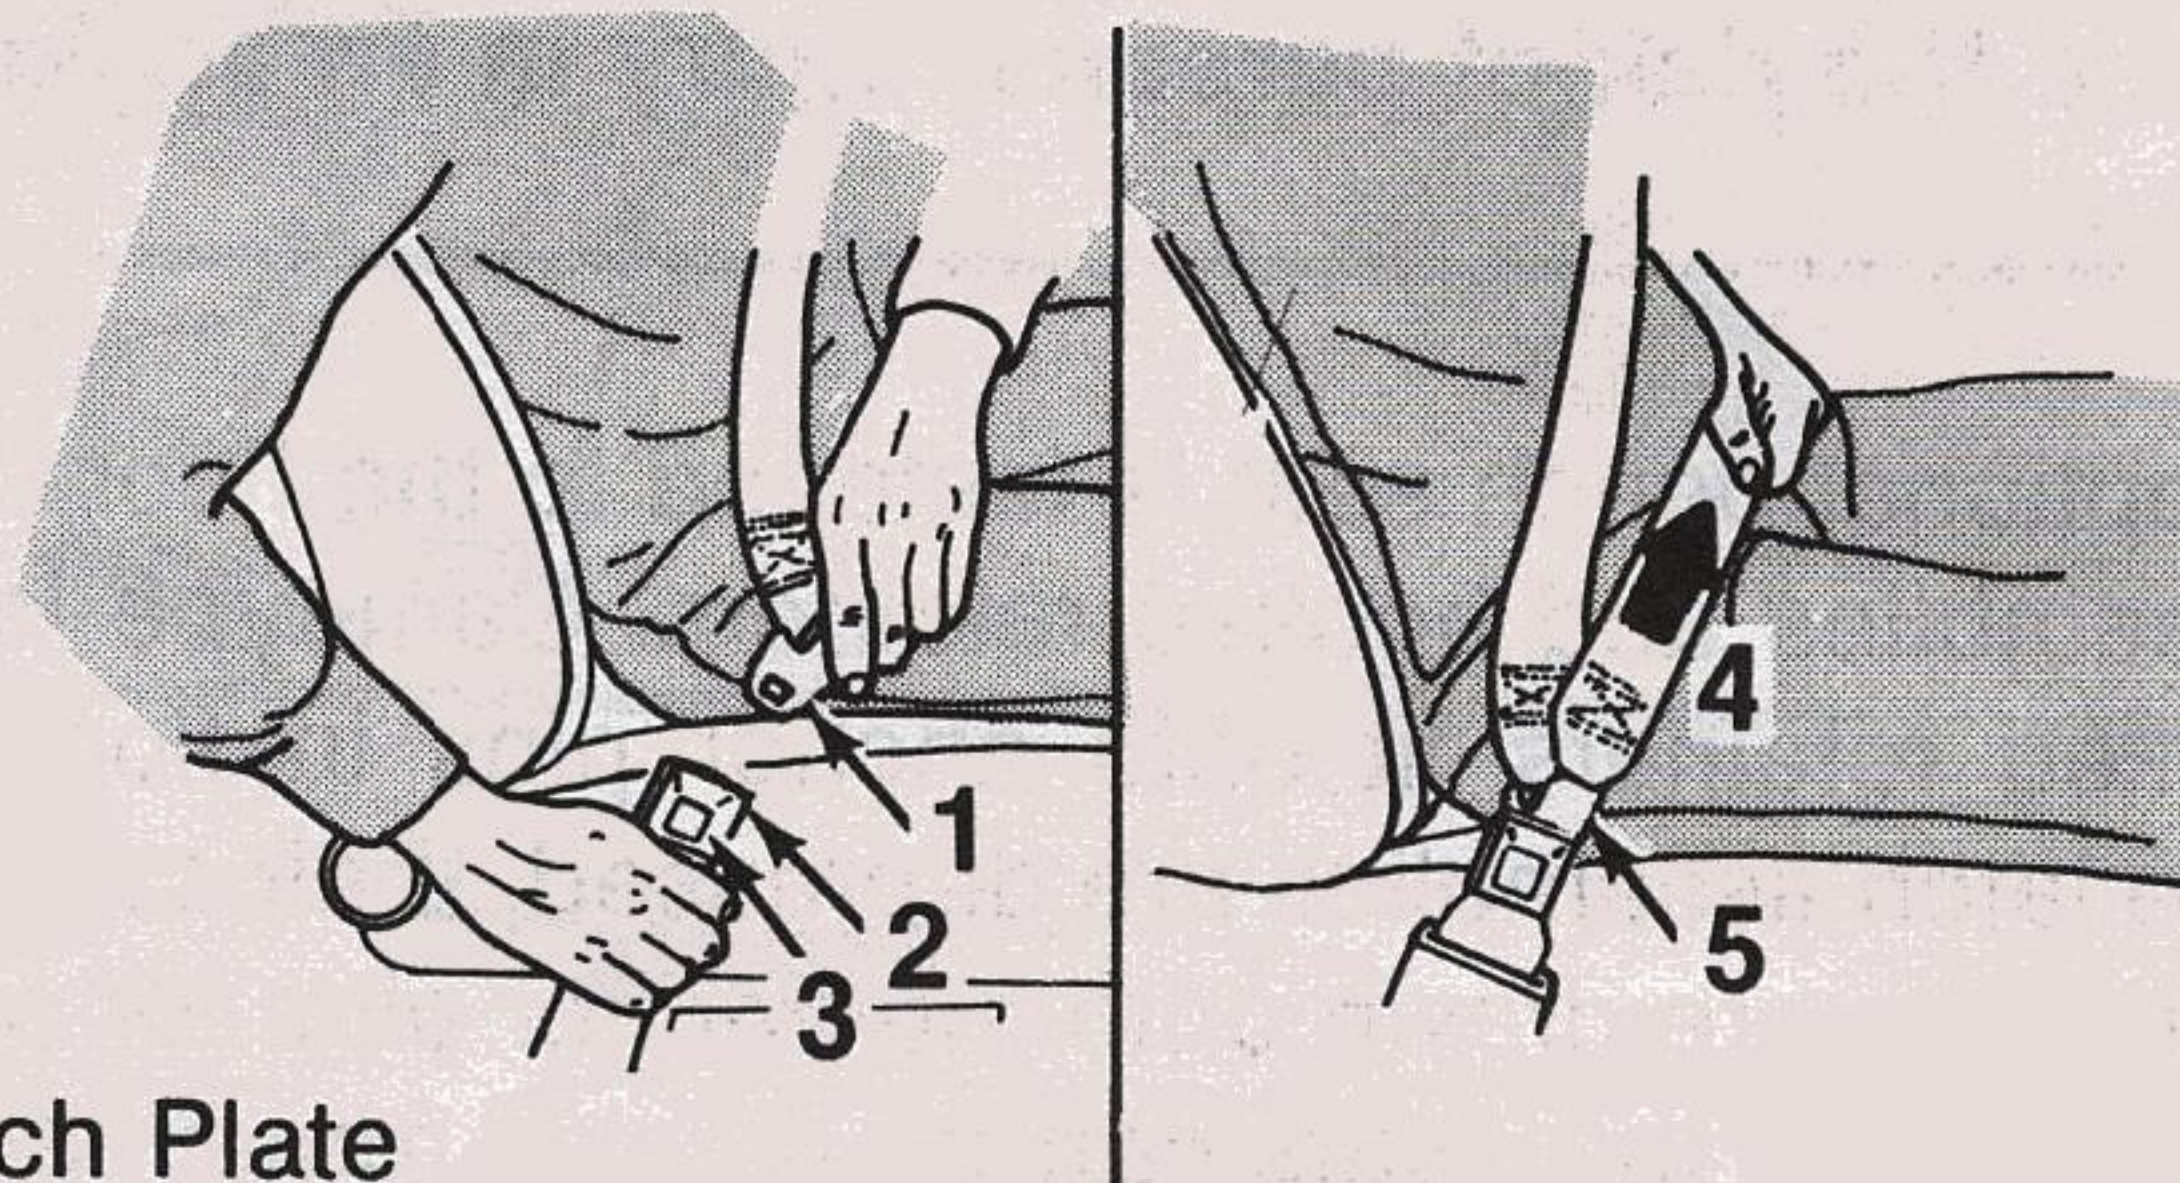


- | | |
|----------------|-------------------------|
| 1. Latch Plate | 4. Take Up Slack |
| 2. Buckle | 5. Keep Low On Hip Bone |
| 3. Push Button | |

B-09789

2. To reduce the risk of sliding under the belt during a collision, position the belt across your lap as low on your hips as possible and pull it toward the door to a snug fit so the retractor can take up slack.

The lap-shoulder belt is designed to lock only during a sudden stop or impact. At other times it should move freely.

3. If the shoulder belt is too snug:
 - A. Pull the shoulder belt out at least 130 millimeters (five inches) so that when you let go, it returns to your chest.
 - B. Then pull down on the shoulder belt the least amount needed to ease pressure but no more than 25mm or one inch and let go.
4. To get rid of the slack in the belt, pull the belt out as you did in Step 3A above.

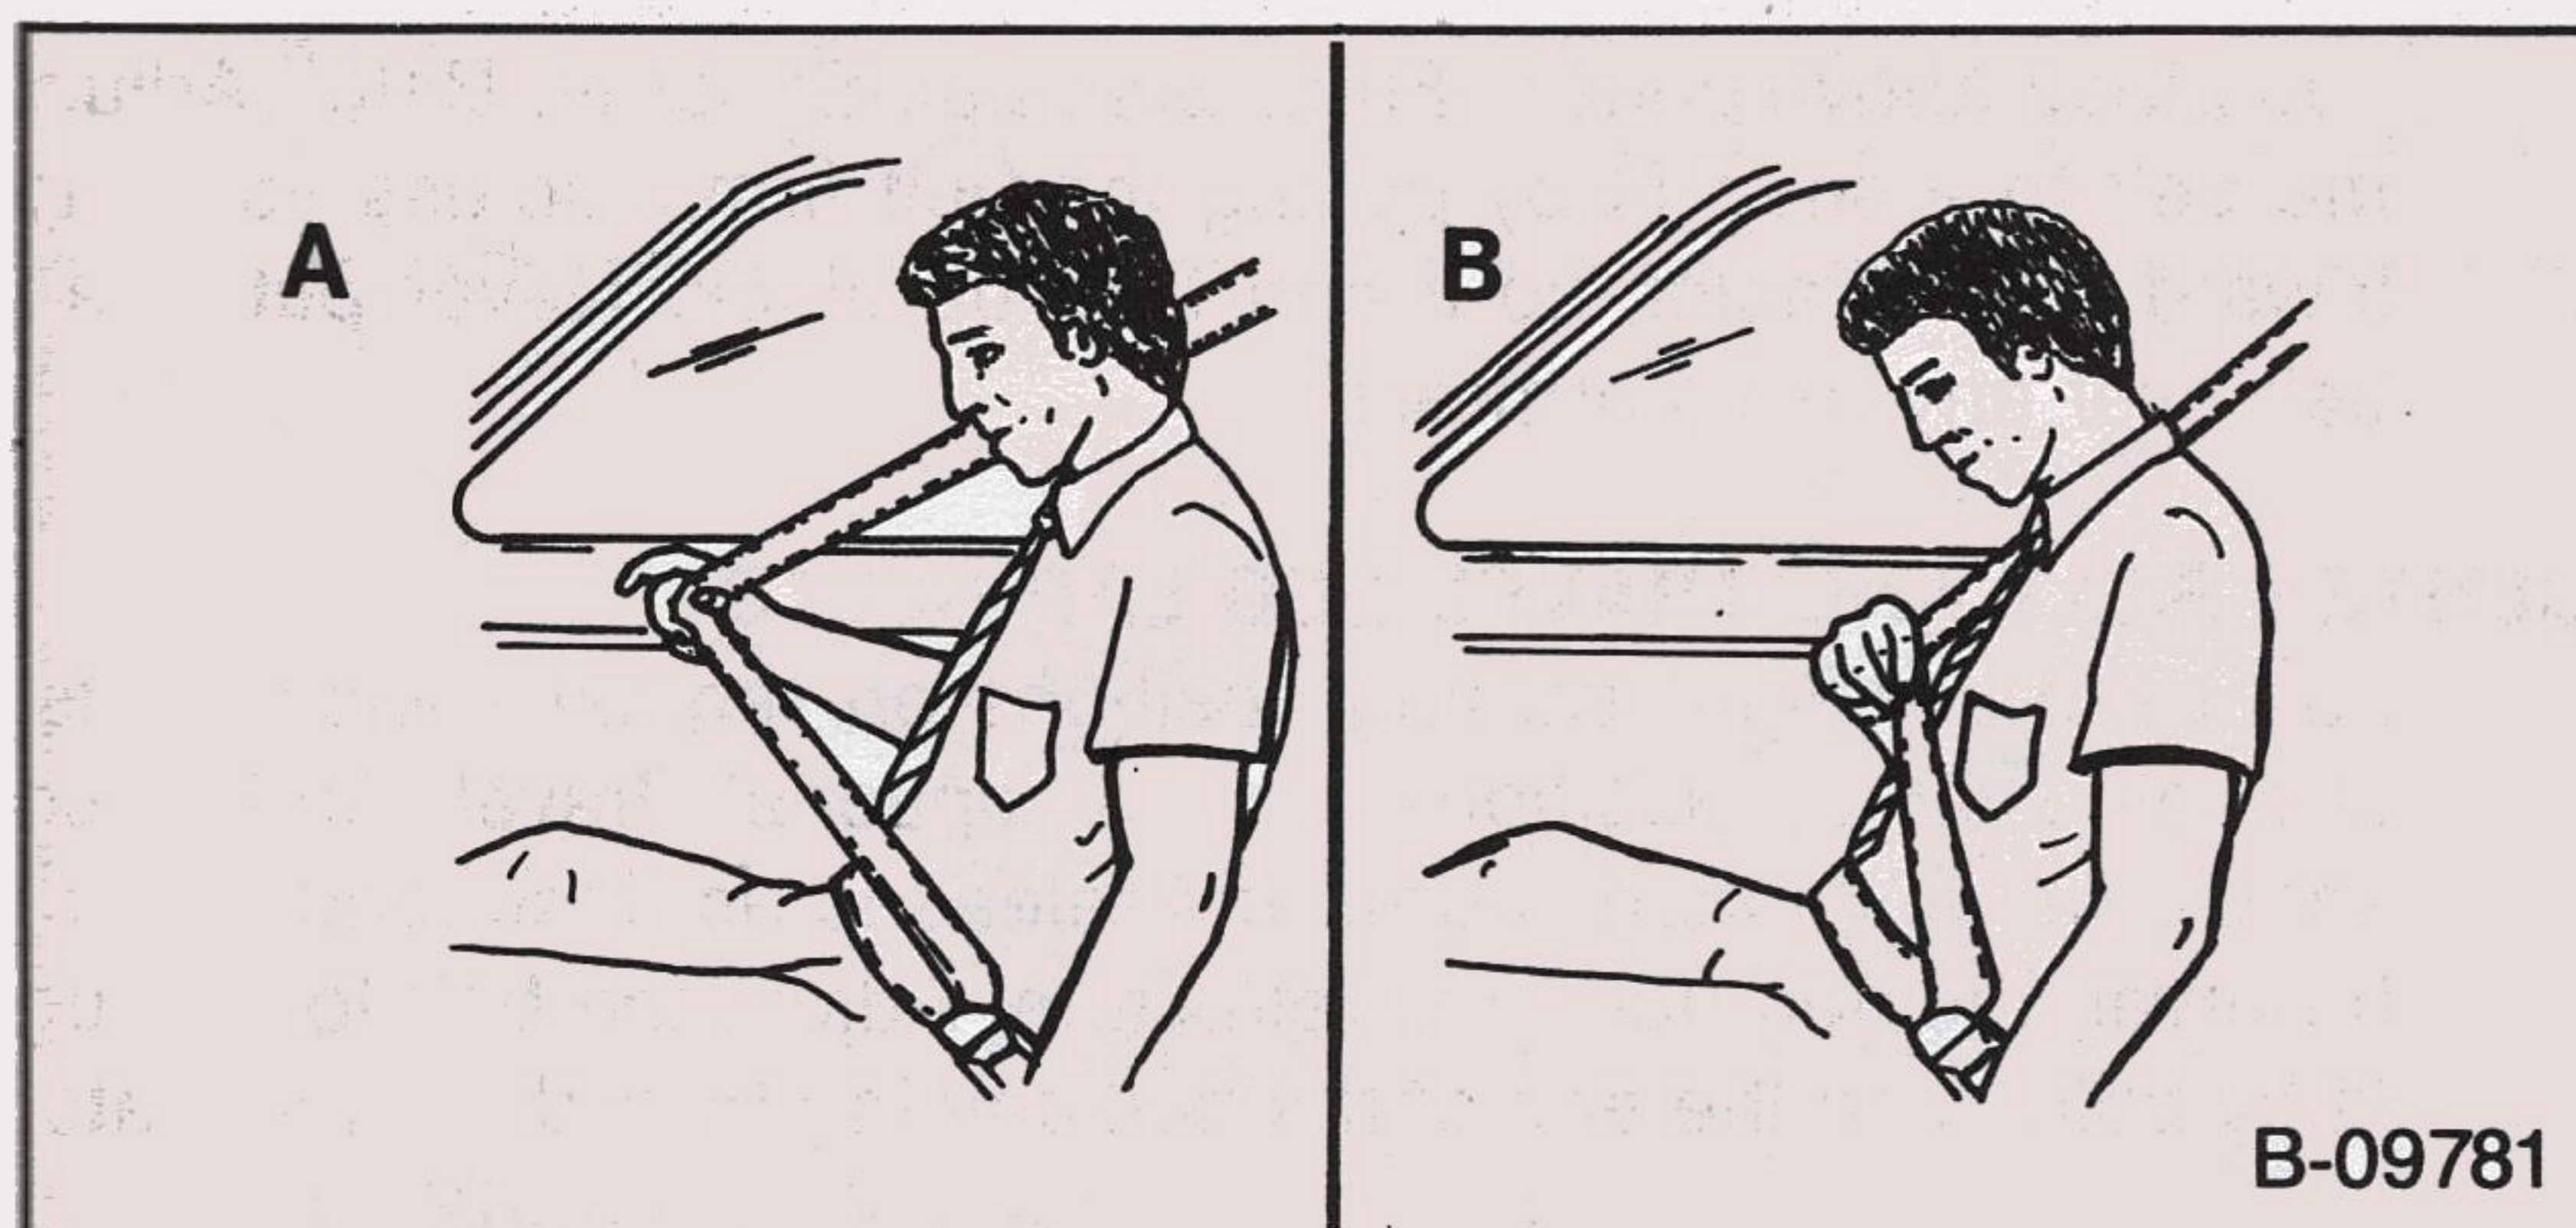

Keep any shoulder belt slack to a minimum. Too much belt slack could reduce the amount of protection in an accident because the belt is too loose to restrain you properly.

5. To unfasten the belt, push in the button in the center of the buckle. The retractor should rewind the belt when the buckle is unlatched. To help prevent damage to the seat belt and interior trim, before closing the door be sure the belt is fully retracted and the latch plate is out of the way.

Seat Belt Reminder

When the key is turned to "Run" or "Start," a light will come on for four to eight seconds to remind people to fasten their seat belts. Unless the driver's seat belt is buckled, a buzzer will sound at the same time.

If the seat belt or reminder system does not work as described, see your dealer for service.

REAR SEAT LAP BELTS

Rear seat outboard lap belts, except for the optional Travel Bed, have retractors which are designed to take up extra webbing.


BENCH SEAT OUTBOARD LAP BELTS

1. In a single motion pull the rear seat outboard lap belt across your lap enough to push the latch plate into the buckle, until it clicks. If the webbing locks before the latch plate reaches the buckle let it rewind fully into its retractor to unlock it so the belt can be pulled out to the proper length. (Lap/shoulder belts are available as an accessory for outboard designated seating positions on each available bench seat.)

2. These belts should be positioned, worn, and released as described above under "Front Seat Lap-Shoulder Belt." Adjust the belt to a snug fit by pulling the belt firmly across your lap toward the retractor, so it can take up slack. Never put a lap belt over any seats armrest.

CENTER SEAT AND TRAVEL BED LAP BELTS

1. Lap belts at center seating positions on regular bench seats, and all seating positions on the optional Travel Bed, also should be positioned, worn, and released as described above; however, they do not have retractors. Adjust the belt to a snug fit by pulling on the end of the belt coming from the latch plate.

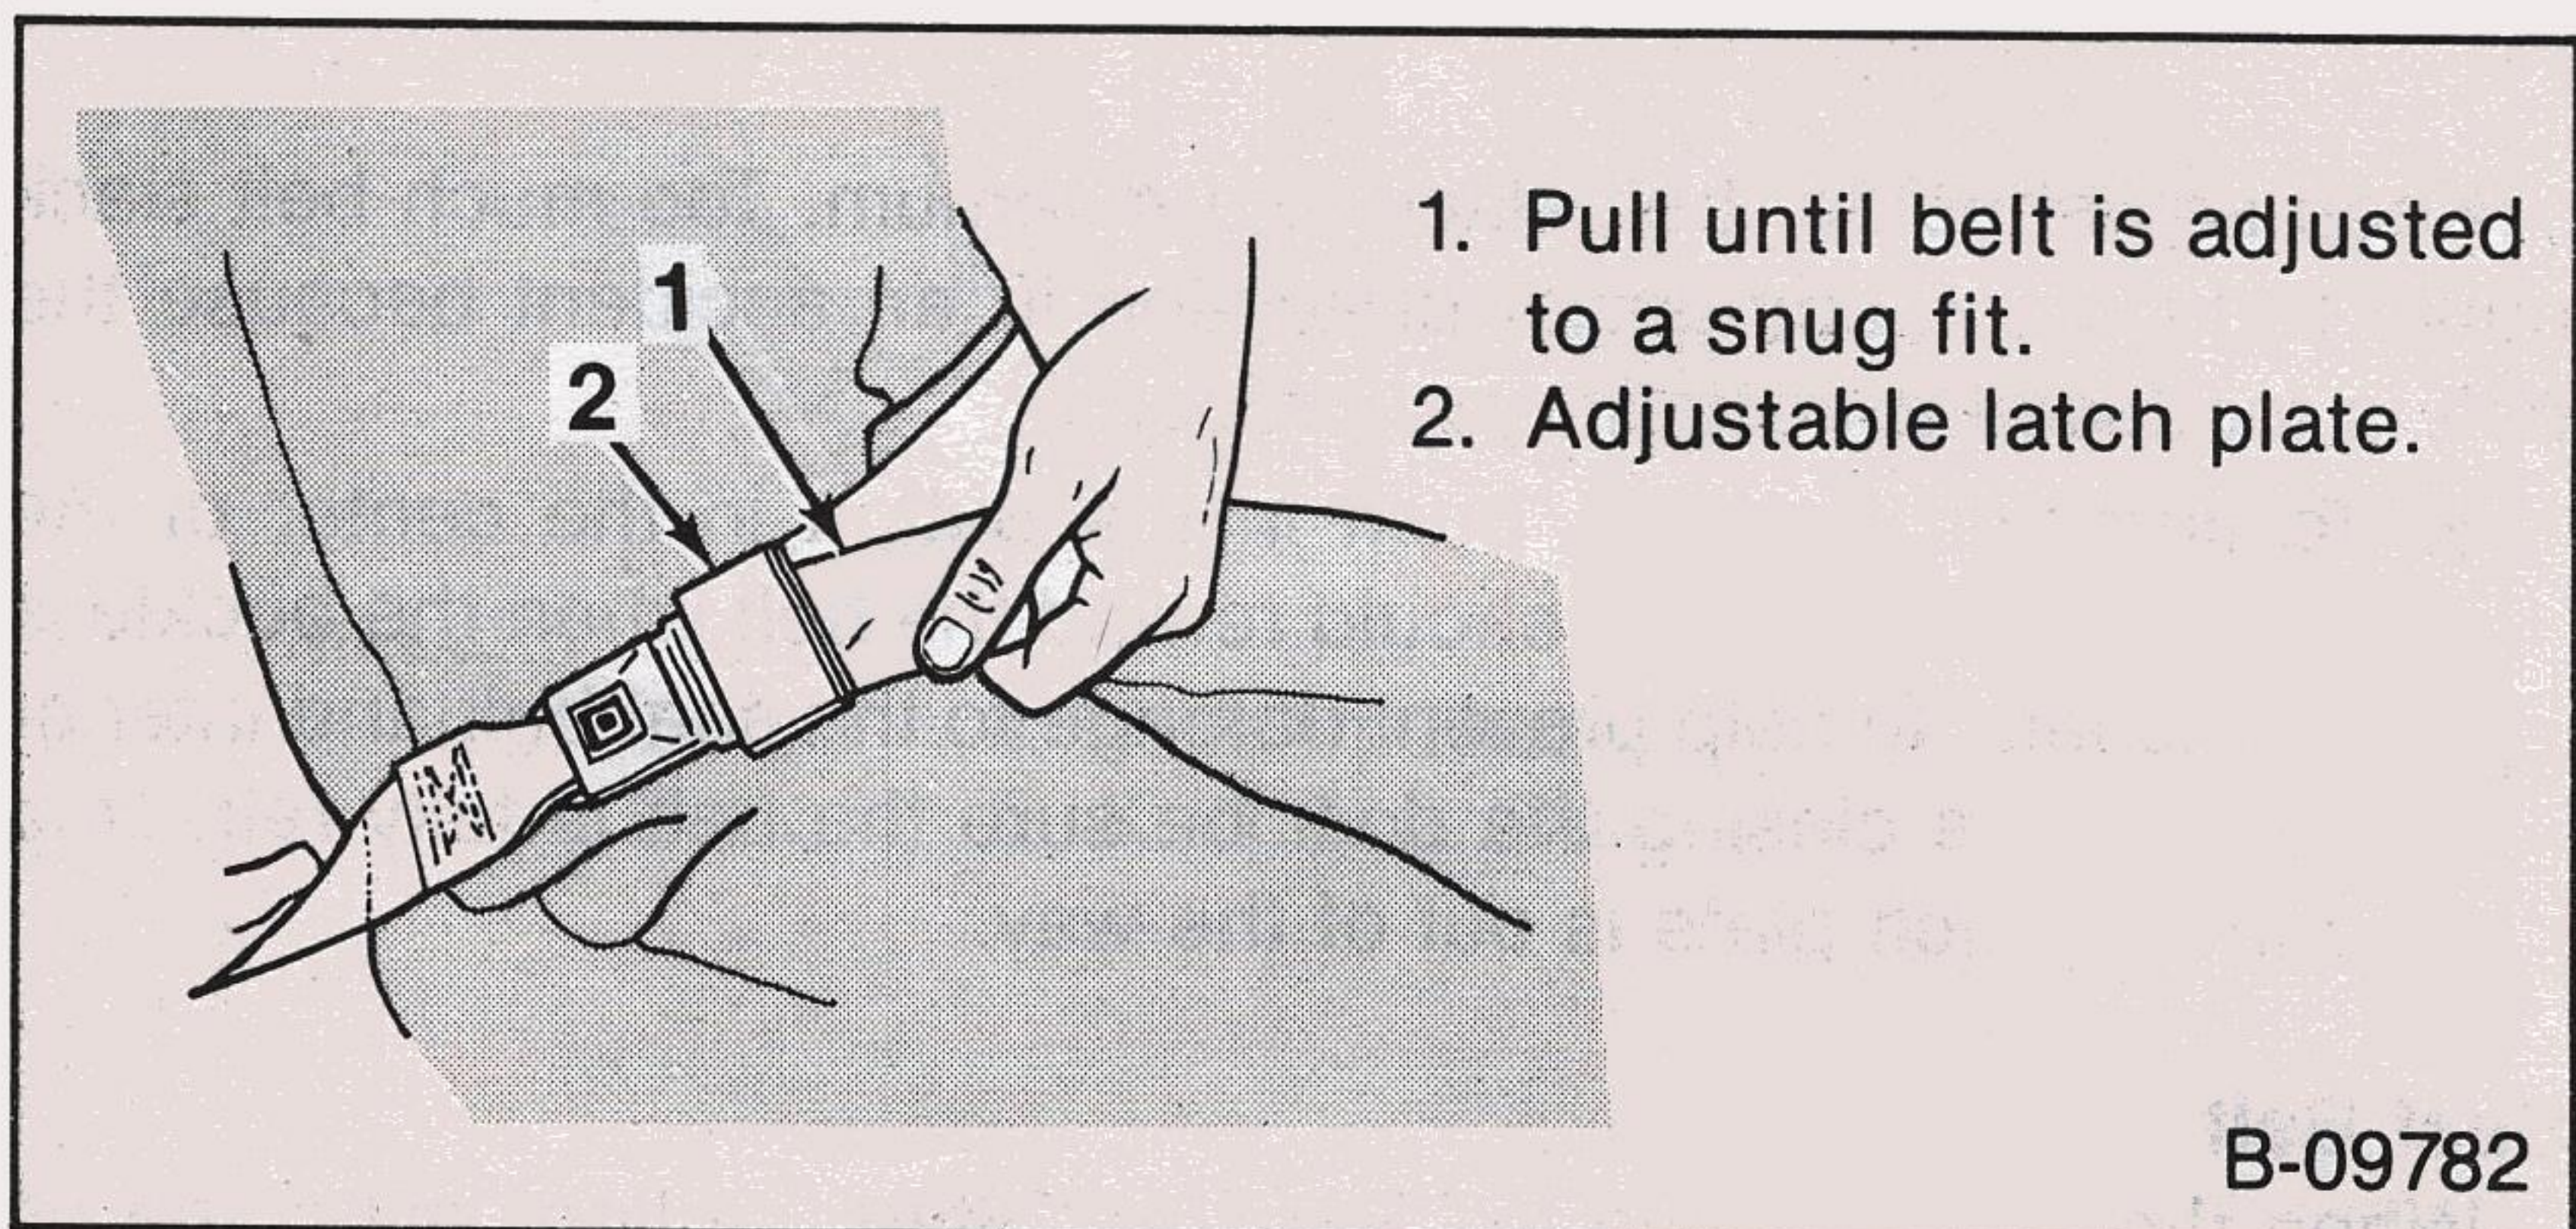


2. To lengthen the lap belt at center seats or on the Travel Bed, place the latch plate at an angle to the belt webbing and pull on the latch plate. The belt should then slide easily.

REAR SEAT SHOULDER BELT (DEALER-INSTALLED ACCESSORY)

When properly worn with a lap belt, a shoulder belt (available for certain rear outboard seats) can give riders added protection. It can prevent or reduce impact with the inside of the vehicle by restraining the upper body in a collision, especially in a frontal impact. If you have your dealer install this accessory, you may wish to ask that the originally-installed lap belts (that lack the "keyhole" slot for the shoulder belt) be returned to you.

1. To use the detachable shoulder belt, before fastening the lap belt, place the knob on the shoulder belt end in the "keyhole" on the lap belt latch plate. Tilt the knob as needed to pass it through the slot. Pull the knob firmly upward to seat it at the

narrow end of the keyhole, then fasten the lap belt. (Do this in reverse when taking off the shoulder belt and putting it away.)

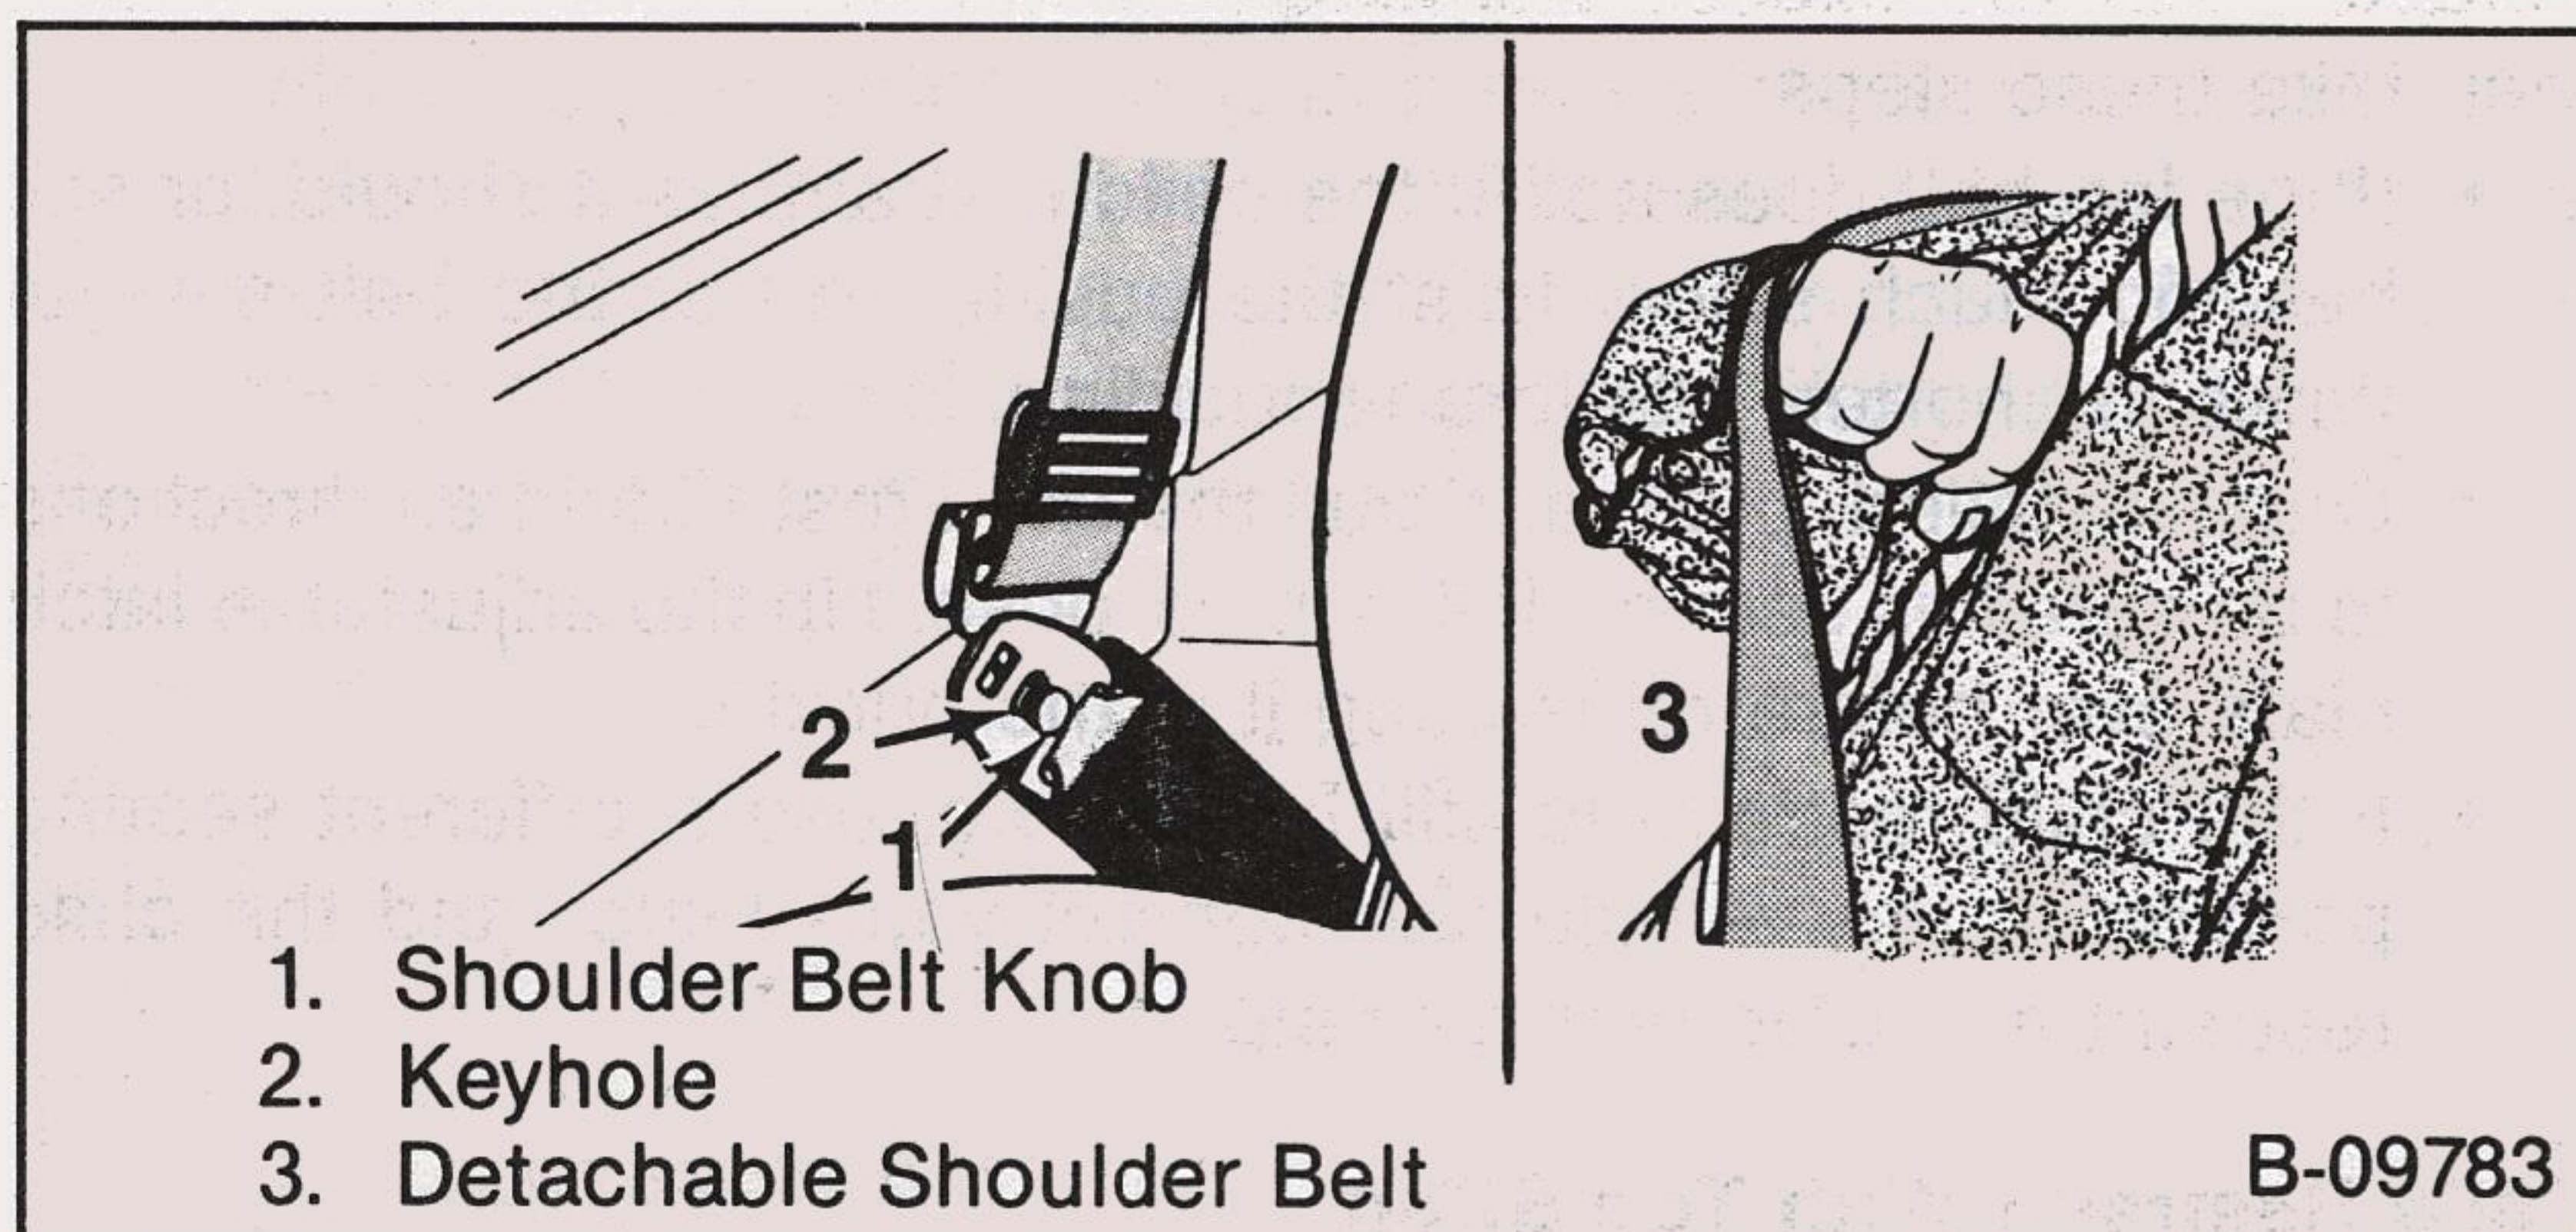

2. A detachable shoulder belt can be made shorter and longer in the same way as a center seat lap belt.

3. Place a clenched fist between the belt and your chest, as shown. The detachable shoulder belt should have enough slack to put a fist's width between your chest and the belt.

Keep any shoulder belt slack to a minimum. Too much belt slack could reduce the amount of protection in an accident because the belt is too loose to restrain you properly.

SEAT BELT INSPECTION

Now and then check that belts, buckles, latch plates, retractors, reminder systems and guide loops work properly; look for loose parts or damage that could keep the restraint system from doing its job. Replace a belt if the webbing has been cut or otherwise damaged. Replace the belts in use during all but a minor collision; if there is any question, replace the belt.

CHILD RESTRAINT

All vehicle occupants and especially children should be restrained whenever riding in vehicles. Holding a child in your arms is not a substitute for a child restraint system. In an accident, a child held in a person's arms can be struck or crushed by any unrestrained rider. An unrestrained child could also be injured by striking the interior, or by being ejected from the vehicle during a sudden maneuver or impact. A child restraint system can help protect a child in a vehicle.

In using any child restraint system, be sure to read and follow all instructions on installation and use that come with the system.

Using A Lap Belt That Has No Retractor

When securing a child restraint with a lap belt that has no retractor, pull the excess webbing through the adjustment feature, then take these steps:

- If the lap belt does not fit the child restraint as it should, or still has too much slack, twist the buckle end of the belt several times to shorten it before rebuckling.
- Once installed, push and pull the child restraint in all directions to be sure it is secure. If it comes loose, flip the adjustable latch plate over before reinserting it in the buckle.
- If the child restraint is still not secure, use a different seating position in the vehicle and contact your dealer and the child restraint manufacturer for help.

Child Restraint With Top Strap

Should you choose to use a top-strap-equipped child restraint in this vehicle, you may either want to have your dealer install the top strap anchor bracket, or learn from the dealer where to attach it. (The anchor bracket is supplied by the company that makes the child restraint system.)

Child restraint systems that require a top strap are not recommended for use in the following locations in this vehicle because there is no appropriate place to attach the top strap:

- In any seating position on the third seat, in 110-inch wheelbase vans.
- In any seating position on the fourth seat, in 125-inch wheelbase vans.
- In the center or right outboard seating position (as you face forward) on the third seat of 125-inch wheelbase vans when there is no fourth seat. (Any seating position on the third seat of 125-inch wheelbase vehicles may be used if there is a fourth seat).

Riding Without A Child Restraint Where Permitted By Law

Note that some form of child restraint is now mandatory in all fifty states (most provinces in Canada). For the best protection in an accident or sudden maneuver, children small enough for child restraint systems should be restrained that way if at all possible. However, the following may provide some degree of protection for such children if a child restraint is not used.

- Infants who cannot sit up should be placed in a padded baby carrier. Put it crossways on the vehicle seat and securely restrain it with the truck's lap belts. Or, if that is not possible,

place it on the floor behind the driver's seat, crossways in the vehicle.

- Children who can sit up by themselves should be restrained with a lap belt when riding in a rear seat. In the front seat, a child should wear both lap and shoulder belt. If the shoulder belt irritates the neck or face, move the child closer to the center of the vehicle or to the rear seat, if present. Never let a child stand or kneel on any seat.

For continuing satisfaction keep your vehicle all GM. General Motors parts are identified by one of these trademarks.



SECTION 2

STARTING AND OPERATING

CONTENTS

Engine Exhaust Gas Caution	2- 2
New Vehicle Break-In Period	2- 4
Trailer Towing	2- 4
Fuel Requirements	2- 8
Starting The Engine	2-25
Guard Against Theft	2-29
Parking	2-30
Transmission	2-31
Steering Column Controls	2-39
Floor Controls	2-46
Instrument Panel And Controls	2-51
Indicator And Warning Lights	2-53
Gages	2-57
Main Lights	2-58
Heating And Air Conditioning Systems	2-60
Delco Sound Systems.	2-63
Other Controls And Features	2-70

ENGINE EXHAUST GAS CAUTION (CARBON MONOXIDE)

CAUTION: Do not breathe exhaust gas because it contains carbon monoxide, which by itself has no color or odor. Carbon monoxide is a dangerous gas. It can cause unconsciousness and can be lethal.

If at any time you think exhaust fumes are entering the vehicle, have the cause determined and corrected as soon as possible. If you must drive under these conditions, drive only with all windows fully open.

Protect against carbon monoxide entry into the vehicle body. The best way is to keep the engine exhaust system, vehicle body and body ventilation system properly maintained. We recommend that the exhaust system and body be inspected by a competent technician:

- each time the vehicle is raised for an oil change;
- whenever a change is noticed in the sound of the exhaust system;
- whenever the exhaust system, underbody or rear of the vehicle is damaged or becomes corroded.

Refer to your Maintenance Schedule booklet for parts requiring inspection.

To allow proper operation of your vehicle's ventilation system, keep the air inlet grille in front of the windshield clear of snow, leaves or other obstructions at all times.

Do not park with the engine running or idle this vehicle for more than 10 minutes with the ventilation system control switch in the "OFF" position. Even with the ventilation system on, running the engine while parked or stopped for longer periods of time is not recommended. Entry of carbon monoxide into the vehicle body is possible with a poorly repaired, damaged, or corroded exhaust system or body.

(Continued)

CAUTION (Continued)

Do not run the engine in confined areas (such as garages or next to a building) any more than needed to move the vehicle. When the vehicle has to be stopped in an unconfined area with the engine running for any more than a few minutes, take the following steps:

- A. Adjust the heating or cooling system to force outside air into the vehicle as follows:
 - 1. On vehicles not equipped with air conditioning, set the fan to intermediate or high speed and the upper control lever to any position.
 - 2. On vehicles equipped with manual air conditioning, set the fan to an intermediate or high speed and the upper control lever to any position except "OFF" or "MAX."
- B. Keep the exhaust tailpipe area clear of snow and other material to help reduce the buildup of exhaust gases under the vehicle. This is particularly important when parked in blizzard conditions.

Driving with tailgates, rear or windows open is not recommended. Under some conditions, exhaust gases may be drawn into the vehicle. If the tailgate, rear doors or rear windows must remain open for some reason while moving, or if electrical wiring or other cable connections to a trailer must pass through the seal between the tailgate or rear doors and body, follow these precautions:

- Close all windows.
- Adjusting the heating or cooling system to force outside air into the vehicle as described above, but set the fan to high speed.
- On vehicles with outside air vents in or under the instrument panel, open the vents fully.

Take special care to prevent the chance of carbon monoxide exposure if the vehicle is modified for recreational or other usage. Also, some recreational vehicle appliances (such as lights, refrigerators, stoves, heaters) may give off carbon monoxide. Use these appliances only if there is enough ventilation.

NEW VEHICLE “BREAK-IN” PERIOD

You can drive your new vehicle from its very first mile/kilometer without following a formal “break-in” schedule. However, there are things you can do during the first few hundred miles/kilometers of driving that will add to the future performance and economy of your vehicle.

We recommend you limit your speed during the first 500 miles (800 kilometers) to a maximum of 55 mph (90 km/h); but do not drive for long periods at any one constant speed, either fast or slow. During this time, avoid full throttle starts and, if possible, avoid hard stops especially during the first 200 miles (320 kilometers) of driving.

Always drive at moderate speed until the engine has completely warmed up.

If you plan to use your new vehicle for trailer towing, see the following.

TRAILER TOWING

Since this vehicle is designed and intended to be used mainly as a load-carrying vehicle, towing a trailer will affect handling, durability and economy. Your safety and satisfaction depend upon proper use of correct equipment. Also, you should avoid overloads and other abusive use.

The maximum loaded trailer weight you can pull with your vehicle depends on your intended use and what special equipment has been installed on it.

Information on trailer towing ability, special equipment required, and optional equipment available should be obtained from your dealer.

Ask for the trailering brochure. Or, write: Customer Assistance Department, Chevrolet Motor Division, Warren, Michigan 48090. (In Canada, write to General Motors of Canada Limited, Customer Services Department, Oshawa, Ontario L1J 5Z6.)

TIRES

When towing trailers, inflate the tires to the cold tire pressures (PSI Cold) shown on the Certification Label (on the rear edge of the driver’s door) or the “Tire Inflation Pressure” charts at the back of Section 5.

Remember that when a trailer is connected, the trailer tongue weight is part of the load being carried by the vehicle and, therefore, is included in the GVW of the vehicle.

MAINTENANCE

More frequent service is required when using your vehicle to pull a trailer. Refer to the Maintenance Schedule booklet for Automatic Transmission Fluid, Engine Oil and Rear Axle Lubricant change requirements for trailering.

Now and then, check that all trailer hitch bolts and nuts are tight. Also see the Maintenance Schedule booklet, and the Index in this manual, for important facts on belts, cooling system care and brake adjustment.

BREAK-IN SCHEDULE

Refer to the new vehicle break-in information in this manual. Also, we recommend you drive your new vehicle for 500 miles (800 kilometers) before trailer towing. At the end of this 500 mile (800 kilometer) break-in period, avoid speeds over 50 mph (80 km/h) and full throttle starts during the first 500 miles (800 kilometers) of trailer towing.

CAUTION:

BRAKES—To help avoid personal injury due to poor braking action:

- Trailer brakes of adequate size are required on trailers of more than 450 kilograms (1,000 pounds) loaded weight.
- If you use trailer brakes with this vehicle, follow the installation and balance instructions of the trailer brake manufacturer.
- Do not tap into the vehicle's brake system if the trailer brake system uses more than 0.3 cubic centimeters (0.02 cubic inches) of fluid from the vehicle's master cylinder. In this case, the vehicle's brake fluid capacity will not be enough to operate both the vehicle and trailer brakes under all kinds of use.
- All brake fluid parts must be able to stand 20 650 kPa (3,000 psi). The brake fluid tap must be made to the master cylinder port supplying fluid to the rear brakes. Copper tubing is subject to fatigue failure and must not be used.

HITCHES — To help avoid personal injury due to sway caused by such things as crosswinds, large trucks passing or road roughness, or due to separation of the trailer:

- A properly installed and adjusted (1) frame mounted, weight-distributing hitch and (2) sway control with enough capacity are required for trailers more than 1 814 kilograms (4,000 pounds) loaded weight.
- Keep the trailer tongue load at 10 percent of the loaded trailer weight for dead-weight hitches, and 12 percent for weight-distributing hitches. Tongue loads can be adjusted by proper distribution of the load in the trailer. This can be checked by weighing separately the loaded trailer and then the tongue.
- Do not use axle-mounted hitches. They can damage the axle housing, wheel bearings, wheels or tires.
- When you remove a trailer hitch, be sure to seal any mounting holes in the body. This will help prevent entry of exhaust fumes, dirt or water. (Refer to "Engine Exhaust Gas Caution (Carbon Monoxide)" at the beginning of Section 2.)

TRAILER TOWING TIPS

GETTING STARTED

Before entering traffic with a trailer that has electric brakes, start the vehicle and trailer moving and apply the trailer brakes by hand to be sure the trailer brakes are working and the trailer electrical system is connected.

ENGINE COOLING

If your engine overheats, follow the steps under "Engine Cooling System Overheating" in Section 3.

LONG UPHILL GRADES

When going up long grades, you can reduce the chance of engine overheating by downshifting the transmission to a lower gear range and reducing speed to 45 mph (70 km/h) or below.

STEEP OR LONG DOWNGRADES

Before going down a steep or long grade, reduce speed and shift the transmission into a lower gear to help control your vehicle's speed. Try not to hold the brake pedal down too long or too often. This could cause the brakes to overheat and reduce brake effectiveness.

TRANSMISSION

See the method for checking the transmission fluid level in "Service and Maintenance," Section 5 of this manual.

If your vehicle is equipped with an overdrive automatic transmission, when you are towing a trailer more than 1 800 kilograms (4,000 pounds), we recommend you shift to third gear range ("D") instead of Overdrive for normal towing. This is not intended to interfere with the practice of manually downshifting on uphill and downhill grades.

PARKING

You should not park vehicles with trailers on a grade (hill). However, if you must park on a grade, these steps must be followed:

1. Apply the regular brakes.
2. Have someone place wheel chocks under the trailer wheels.
3. When the wheel chocks are in place, release the regular brakes until the chocks absorb the load.
4. Apply the regular brakes and then apply the parking brake; release the regular brake.
5. Shift the transmission to Park.

If the vehicle is parked on a grade, don't shift the transmission to park until the trailer wheels are chocked and the parking brake is set. If you do, the weight of the vehicle and trailer may put so much force on the parking pawl in the transmission that it may be hard to shift out of Park.

When starting, if parked on a grade:

1. Apply the regular brakes and hold.
2. Start the engine while the transmission is in Park.
3. Shift into gear and release the parking brake.
4. Release the regular brakes and drive until the chocks are free.
5. Apply the regular brakes and have someone remove the chocks.

FUEL REQUIREMENTS (GASOLINE ENGINES)

If your vehicle has a diesel engine, see the "Diesel Engine" information in Sections 2 and 5 of this manual.

NOTE TO CANADIAN OWNERS

If your G20/25 Van or Sport Van has a 5.7L V8 engine (VIN Code M) it will be a Heavy Duty Emission Class Vehicle. Refer to Section 6 for information on the VIN and engine code.

Your light duty emission class vehicle gasoline engine (see chart) is designed to use **only unleaded** fuel that meets ASTM Specifications. Unleaded fuel must be used for the emission control systems to operate properly. Its use will also reduce spark plug fouling, exhaust system corrosion and engine oil deterioration. Use of fuels not meeting ASTM specifications could cause poor performance and increase emissions.

LIGHT DUTY EMISSION	
G10 THRU 20	VAN & SPORTVAN
G30	VAN & SPORTVAN(LESS THAN 8,500 GVWR)
HEAVY DUTY EMISSION	
G30	VAN, SPORTVAN, CUTAWAY & HI-CUBE VAN

Damage caused by the use of leaded or other improper fuel is not covered by the New Vehicle and Emission Control Systems Warranties. The effectiveness of the catalytic converter decreases

after use of as little as one tank of leaded fuel. Also, your vehicle may have the Computer Command Control System, which includes an oxygen sensor. Leaded fuel will damage the sensor, and deteriorate emission control. (For more information, see "Computer Command Control System" in Section 5).


Federal regulations require that pumps delivering unleaded fuel be labeled with the word UNLEADED. Only these pumps have nozzles that fit the filler neck of your vehicle fuel tank.

In the United States, Federal law also requires that fuel octane ratings be posted on the pumps. The octane rating shown is an average of Research (R) octane number and Motor (M) octane numbers. In most parts of the United States, you should use unleaded fuel with an octane rating of at least 87. However, you may use unleaded fuel with an octane rating as low as 85 in these high-altitude areas: Colorado, Montana, New Mexico, Utah, Wyoming, northeastern Nevada, southern Idaho, western South Dakota, and Texas directly south of New Mexico.

Using unleaded fuel with an octane rating lower than stated above can cause persistent, heavy "spark knock;" if severe, this can lead to engine damage. ("Spark knock" is a metallic rapping noise.) If you detect heavy spark knock even when using fuel of the recommended fuel rating, or if you hear steady spark knock while holding a steady speed on level roads, have your dealer correct the problem. Failure to take steps to stop such knocking is misuse of the vehicle, and damage due to misuse is not covered under the New Vehicle and Emission Control Systems Warranties.

However, now and then you may notice light spark knock for a short time while accelerating or driving up hills. This is no cause for concern because you get the greatest fuel economy benefit from the fuel's octane rating when there is occasional light spark knock. Using fuel with a higher octane rating than that which allows occasional spark knock is an unnecessary expense.

Your Heavy Duty Emission Class Vehicle (see chart) is certified to meet all applicable emission regulations while using regular grade leaded fuel that meets ASTM Specifications. Use of fuels not meeting ASTM specifications could cause poor performance and increase emissions. In the United States, Federal law requires that fuel octane ratings be posted on the pumps. The octane rating shown is an average of Research (R) octane and Motor (M) octane. In most parts of the United States, you should use a regular grade leaded fuel with an octane rating of at least 89. However, you may use fuel with lower minimum octane ratings in the high-altitude areas shown on the map.

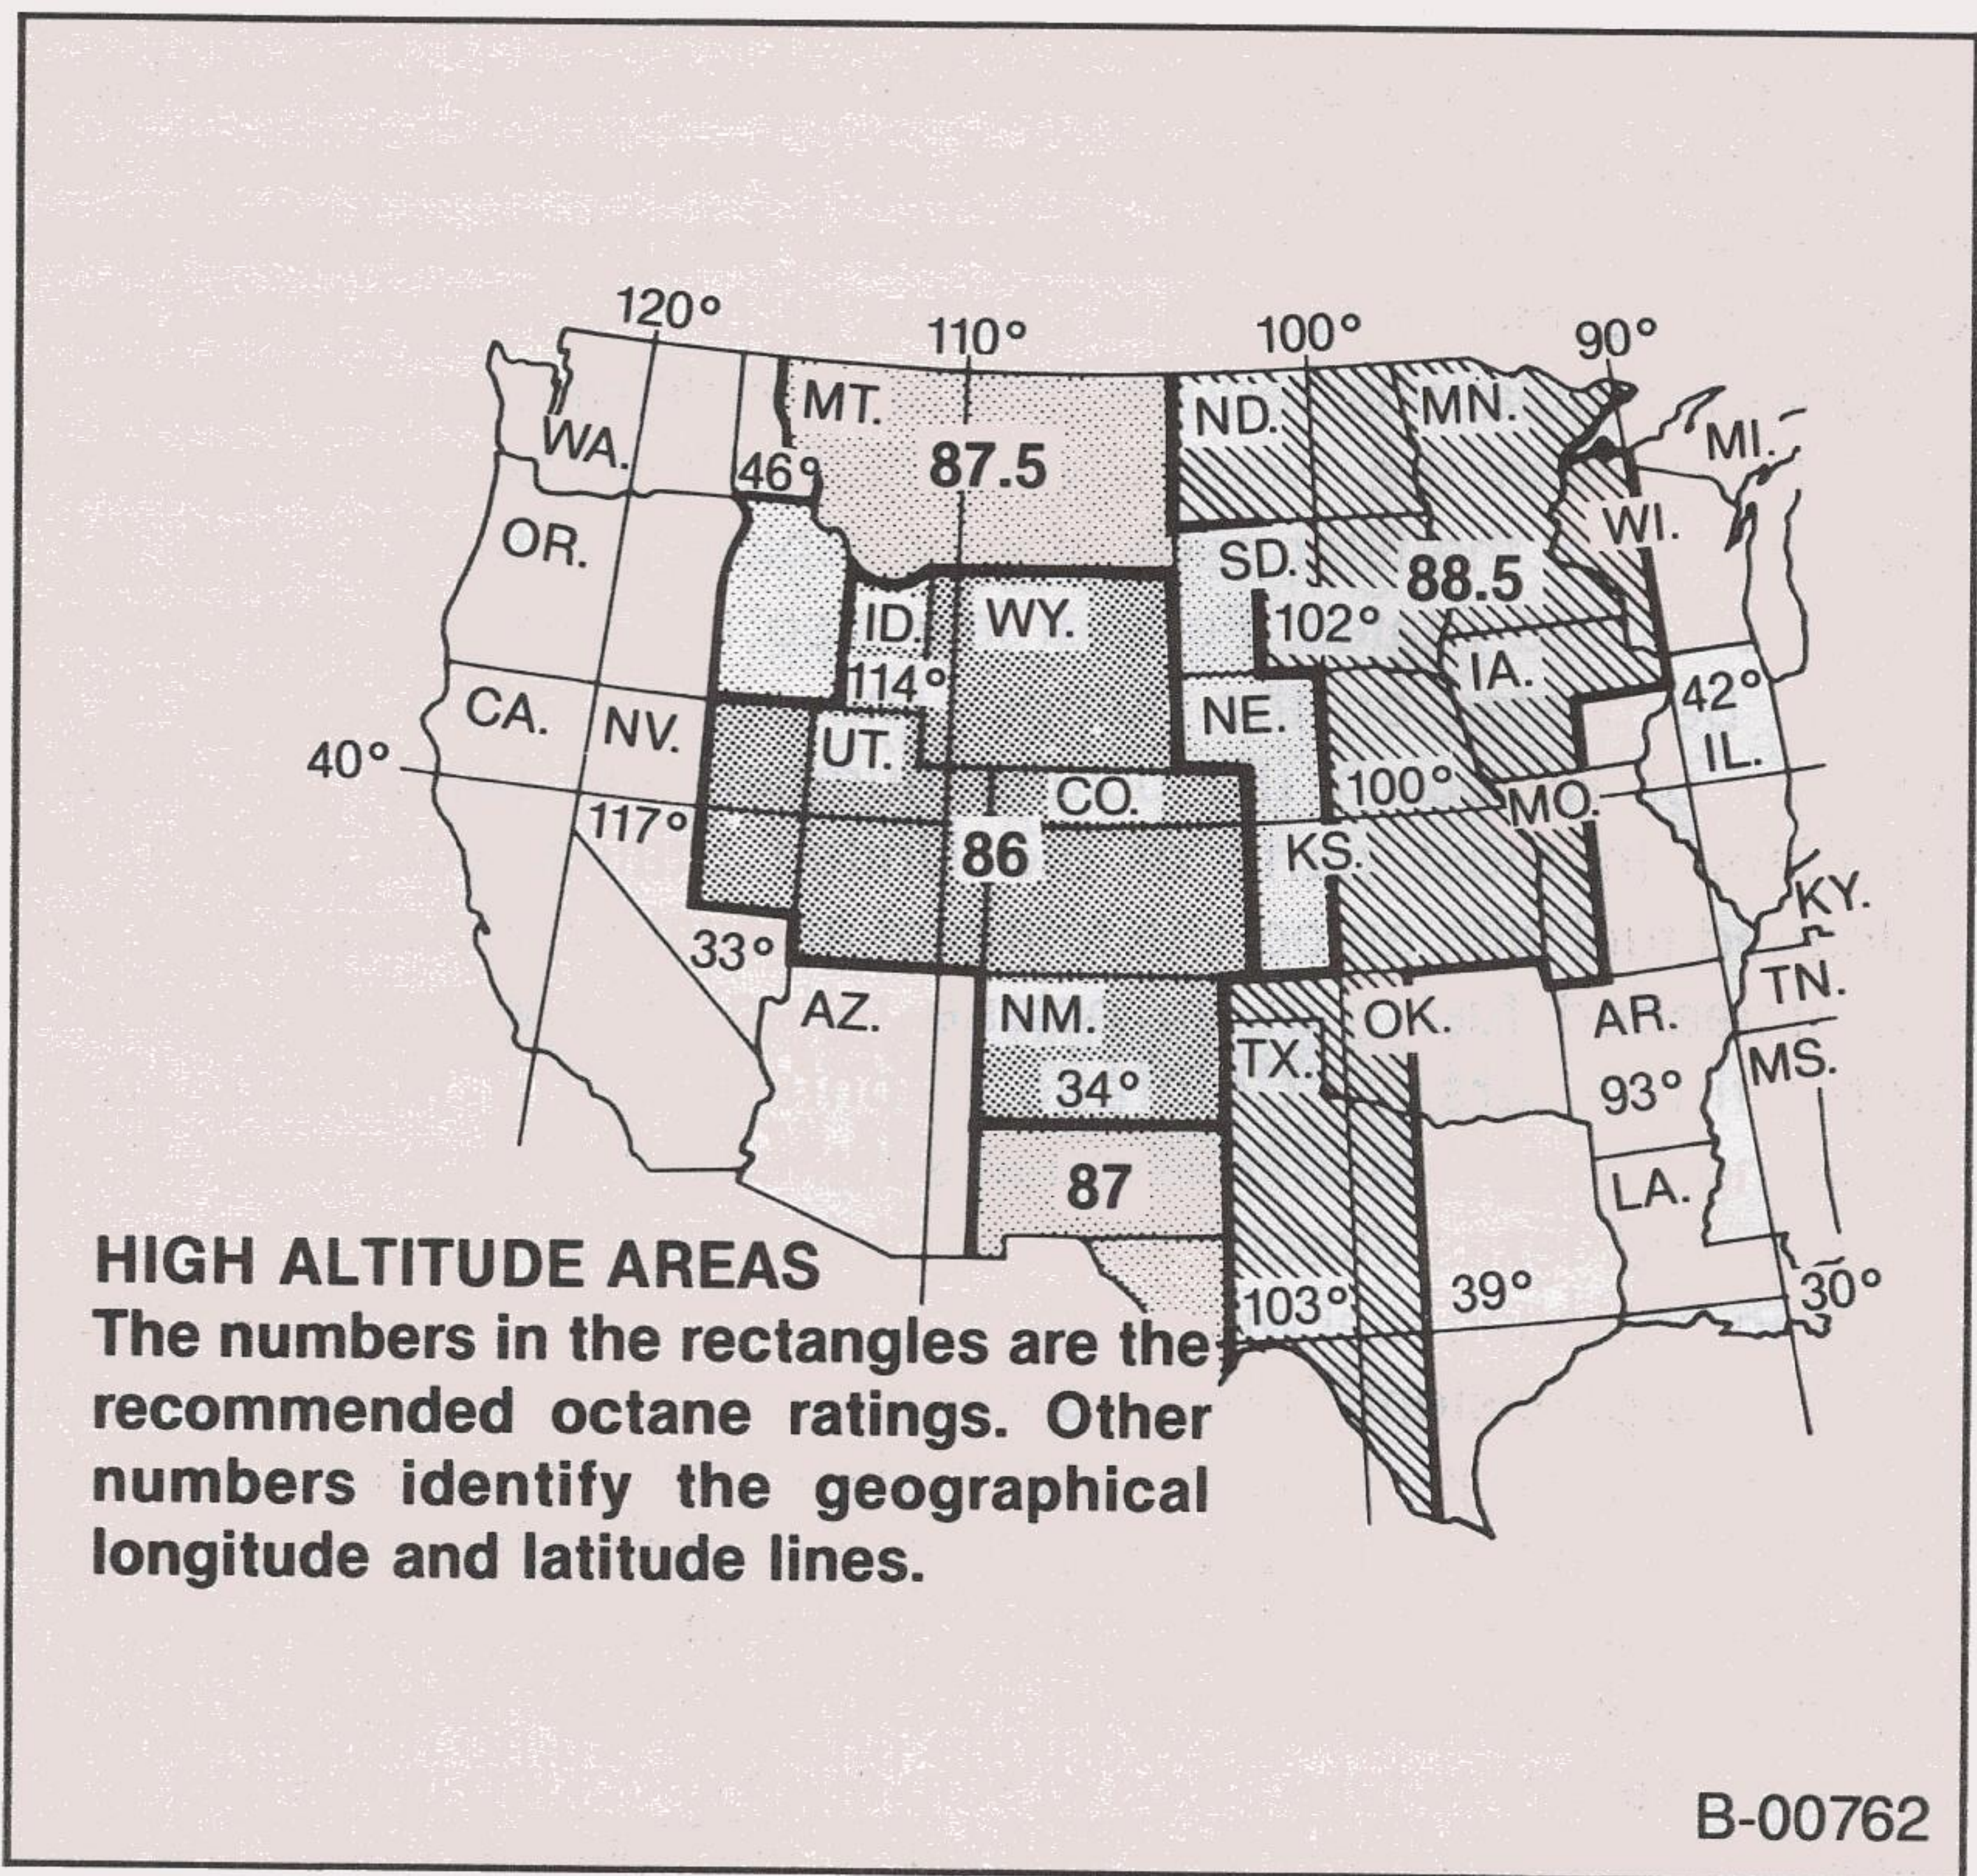

Using fuel with an octane rating lower than recommended above can cause persistent, heavy “spark knock.” (“Spark knock” is a metallic rapping noise.) If severe, this can lead to engine damage. If you detect heavy spark knock even when using fuel of the stated octane rating, or if you hear steady spark knock while holding a steady speed on level roads, have your dealer correct the problem. Failure to take steps to stop such knocking is misuse of the vehicle, and damage due to misuse is not covered under the New Vehicle and Emission Control Systems Warranties.

However, now and then you may notice light spark knock for a short time while accelerating or driving up hills. This is no cause for concern because you get the most fuel economy benefit from the fuel’s octane rating when there is occasional light spark knock. Using fuel with a higher octane rating than that which allows occasional spark knock is an unnecessary expense.

Unleaded fuel may be used in your vehicle if leaded fuel is not available, but it should not be used exclusively. Also, if you use

unleaded fuel, be sure it has the same octane ratings as those recommended for regular grade leaded fuel.

FUELS CONTAINING ALCOHOLS

Fuels composed of blends of gasoline and alcohol (ethanol, methanol, cosolvents) are available. Some fuel suppliers voluntarily use labels of the type shown below to inform consumers that their gasoline contains alcohol. Also, some states require the use of such labels. If you are not sure whether there is alcohol in the fuel you buy, ask the service station operator.

ALCOHOL CONTENT

Methanol _____ %

Ethanol _____ %

Cosolvent _____ %

B-09604

You may use properly blended fuels containing 10 percent or less ethanol (ethyl or grain alcohol) and still be covered by the New Vehicle and Emission Control Systems Warranties.

Do not use fuels containing more than 5 percent methanol under any circumstances. Fuel system damage or vehicle performance problems resulting from the use of such fuels are not the responsibility of GM and are not covered under the New Vehicle and Emission Control Systems Warranties.

Fuels containing 5 percent or less methanol (methyl or wood alcohol) may be suitable for use in your vehicle, if they also contain an equal amount of appropriate cosolvents to prevent phase separation (according to proposed ASTM specifications), and ingredients to protect your vehicle's fuel system against corrosion of

metals and damage to plastics and rubbers caused by methanol. However, the suitability of these fuels is not fully known at this time. Check with the service station operator if you have any questions regarding whether the fuel contains appropriate cosolvents and corrosion inhibitors.

If you are not satisfied with the vehicle driveability and fuel economy provided by fuels containing alcohols, you may prefer to use gasoline that does not contain alcohol.

NOTICE: Take care not to spill fuel during refueling. Fuels containing alcohol can cause paint damage, which is not covered under the New Vehicle Limited Warranty.

DIESEL ENGINE SERVICE DIESEL FUEL REQUIREMENTS AND FUEL SYSTEM

A number of states (and provinces) have restrictions on the purchase of diesel fuel for light-duty trucks, requiring such things as permits or special taxes. Some of these restrictions apply only to residents; others to both residents and visitors. These restrictions can change. To find the current restrictions in any state, contact your auto club, the state police or other state officials.

FUEL REQUIREMENTS (DIESEL ENGINES)

NOTICE: The fuel injection pump, injection nozzles or other parts of the fuel system and engine can be damaged if you use any fuel or fuel additive other than those specifically recommended by GM. Such damage is not GM's responsibility, and is not covered by the new vehicle warranty. To help avoid fuel system or engine damage, please heed the following:

- Some service stations mix used engine oil with diesel fuel. Some manufacturers of large diesel engines allow this; however, for your diesel engine, **DO NOT USE DIESEL FUEL WHICH HAS BEEN CONTAMINATED WITH ENGINE OIL.** Besides causing engine damage, such fuel will also affect emission control. Before using **ANY** diesel fuel, check with the service station operator to see if the fuel has been mixed with engine oil.
- Do not use any fuel additive (other than as recommended under "Biocide" in this section). At the time this manual was printed, no other fuel additive was recommended. (See your GM dealer to find out if this has changed).
- Take care not to run out of diesel fuel. If you do run out of fuel, you may need to crank the engine longer to re-start it after fuel has been added. To protect the cranking motor (starter), do not crank the engine for more than 10-15 seconds at a time. Allow a one minute cooling period between crankings. This will allow the cranking motor to cool and any trapped air in the fuel system to bleed off. However, if air is **TRAPPED** in the system and the engine does not restart after a total of 30 seconds of cranking, air must be purged from the system. See "Fuel Filter Replacement" information in this section.

Your vehicle is designed to use either Number 1-D or Number 2-D diesel fuel. At temperatures less than -7°C (20°F), Number 2-D fuel may pose operating problems (see "Cold Weather Operation" which follows). At colder temperatures, use Number 1-D fuel (if available)

or use a “winterized” Number 2-D (a blend of Number 1-D and Number 2-D). This blended fuel is usually called Number 2-D also, but can be used in colder temperatures than Number 2-D fuel which has not been “winterized.” Check with the service station operator to be sure you get the properly blended fuel.

Note that diesel fuel may foam during a fillup. This can cause your tank to be less than full, even though the automatic pump nozzle has shut off.

COLD WEATHER OPERATION (DIESEL ENGINES)

Diesel fuel is sensitive to temperature. All diesel fuel has a certain amount of heavy paraffin-like components, which are high in energy value and help improve fuel economy. But, when temperatures are less than about -7°C (20°F), these heavy paraffin components begin turning into wax flakes. If temperatures are low enough, these flakes can build up on the fuel tank filter or the engine fuel filter and stop fuel from reaching the engine.

At low temperatures, wax flakes are more likely to form in Number 2-D fuel than in Number 1-D (or “winterized” Number 2-D) fuel. For best operation at temperatures less than -7°C (20°F), use Number 1-D, or Number 2-D which has been blended with Number 1-D for winter use. When temperatures are consistently less than (or near) -18°C (0°F), Use Number 1-D if at all possible. Bear in mind, however, that even Number 1-D fuel will form wax flakes when temperatures are extremely low.

If you are driving in temperatures less than -18°C (0°F) and do not have Number 1-D or “winterized” Number 2-D fuel in the fuel tank, kerosene can be added to reduce waxing. Kerosene should be added at a ratio of one gallon of kerosene to two gallons of diesel fuel. Because of the lower energy value of kerosene (and reduced fuel economy) it should be added only when anticipated temperatures are less than -18°C (0°F). Once kerosene has been added the engine should be run for several minutes to mix the fuel.

NOTICE: Do NOT try to use home heating oil or gasoline in your diesel engine. Either heating oil or gasoline may cause engine damage.

The addition of kerosene will not unplug a filter plugged with wax. Warming a “waxed” filter to 0°C to 10°C (32°F to 50°F) will return the wax to solution. Filter replacement is not normally required.

To further improve cold weather operation, an engine block heater and fuel heater are on your diesel engine. (See “Cold Weather Starting” under “Starting the Diesel Engine” in this section for information on the block heater. The fuel heater is designed to come on when the fuel temperature is less than 4°C (40°F). It warms the fuel and helps stop wax flakes from building up in the fuel filter.

WATER IN FUEL (DIESEL ENGINES)

During refueling, it is possible for water (and other contaminants) to be pumped into your fuel tank along with the diesel fuel. Your vehicle has a water separation system in the fuel filter. It also has a “WATER IN FUEL” light in the instrument cluster which is designed to come on to warn of excessive water in the fuel system. Should the fuel filter become plugged, a low pressure sensor will also activate the light. This can happen if a service station does not regularly inspect and clean its fuel tanks, or if a service station receives contaminated fuel from its supplier(s).

(The light is also designed to come on during engine starting to let you know the bulb is working. If the light does not come on, check the fuse and the bulb; if these are OK, see your GM dealer).

If the “Water In Fuel” light comes on any other time the following chart may help pinpoint a specific problem.

“WATER IN FUEL” LIGHT CHART

PROBLEM	RECOMMENDED ACTION
Light comes on intermittently.	Drain water from fuel filter.
- Light stays on-engine running. - Temperatures above freezing. - Temperatures below freezing.	Drain fuel filter immediately. If no water is drained and light stays on – replace fuel filter. Drain fuel filter immediately. If no water can be drained — water may be frozen. Open air bleed to check for fuel pressure. If no fuel pressure replace filter.
Light comes on at high speed or heavy accelerations.	Fuel filter plugged—replace.
- Light stays on continuously –engine stalls will not restart. - After initial start-up. - Immediately after refueling—Large amounts of water probably pumped into the tank.	Fuel filter or fuel lines may be plugged. See your dealer. Fuel tank purging required. See “Fuel Tank Purge” procedure found in Section 2 of this manual.

B-09658

BIOCIDES

In warm or humid weather, fungus and/or bacteria may form in diesel fuel if there is water in the fuel. Fungus or bacteria can cause fuel system damage by plugging the fuel lines, fuel filters or injection nozzles. They can also cause fuel system corrosion.

If fungus or bacteria has caused fuel system problems, have your GM dealer correct these problems. Then, use a diesel fuel biocide to sterilize the fuel system (follow the biocide manufacturer’s instructions). Biocides are available from your dealer, service stations, parts stores and other such places. See your GM dealer for


advice on using biocides in your area, and for recommendations on which biocides to use.

FUEL FILTER—WATER DRAIN (DIESEL ENGINES)

Your diesel equipped truck has a multifunction filter for solid contaminants and water. The filter is mounted on the rear of the inlet manifold under the air cleaner.

Follow these steps to drain the fuel filter:

1. Stop and park the vehicle in a safe place. Turn off the engine and apply the parking brake.
2. Remove the vehicle fuel tank cap.
3. Place a fuel-resistant container under the filter drain hose.

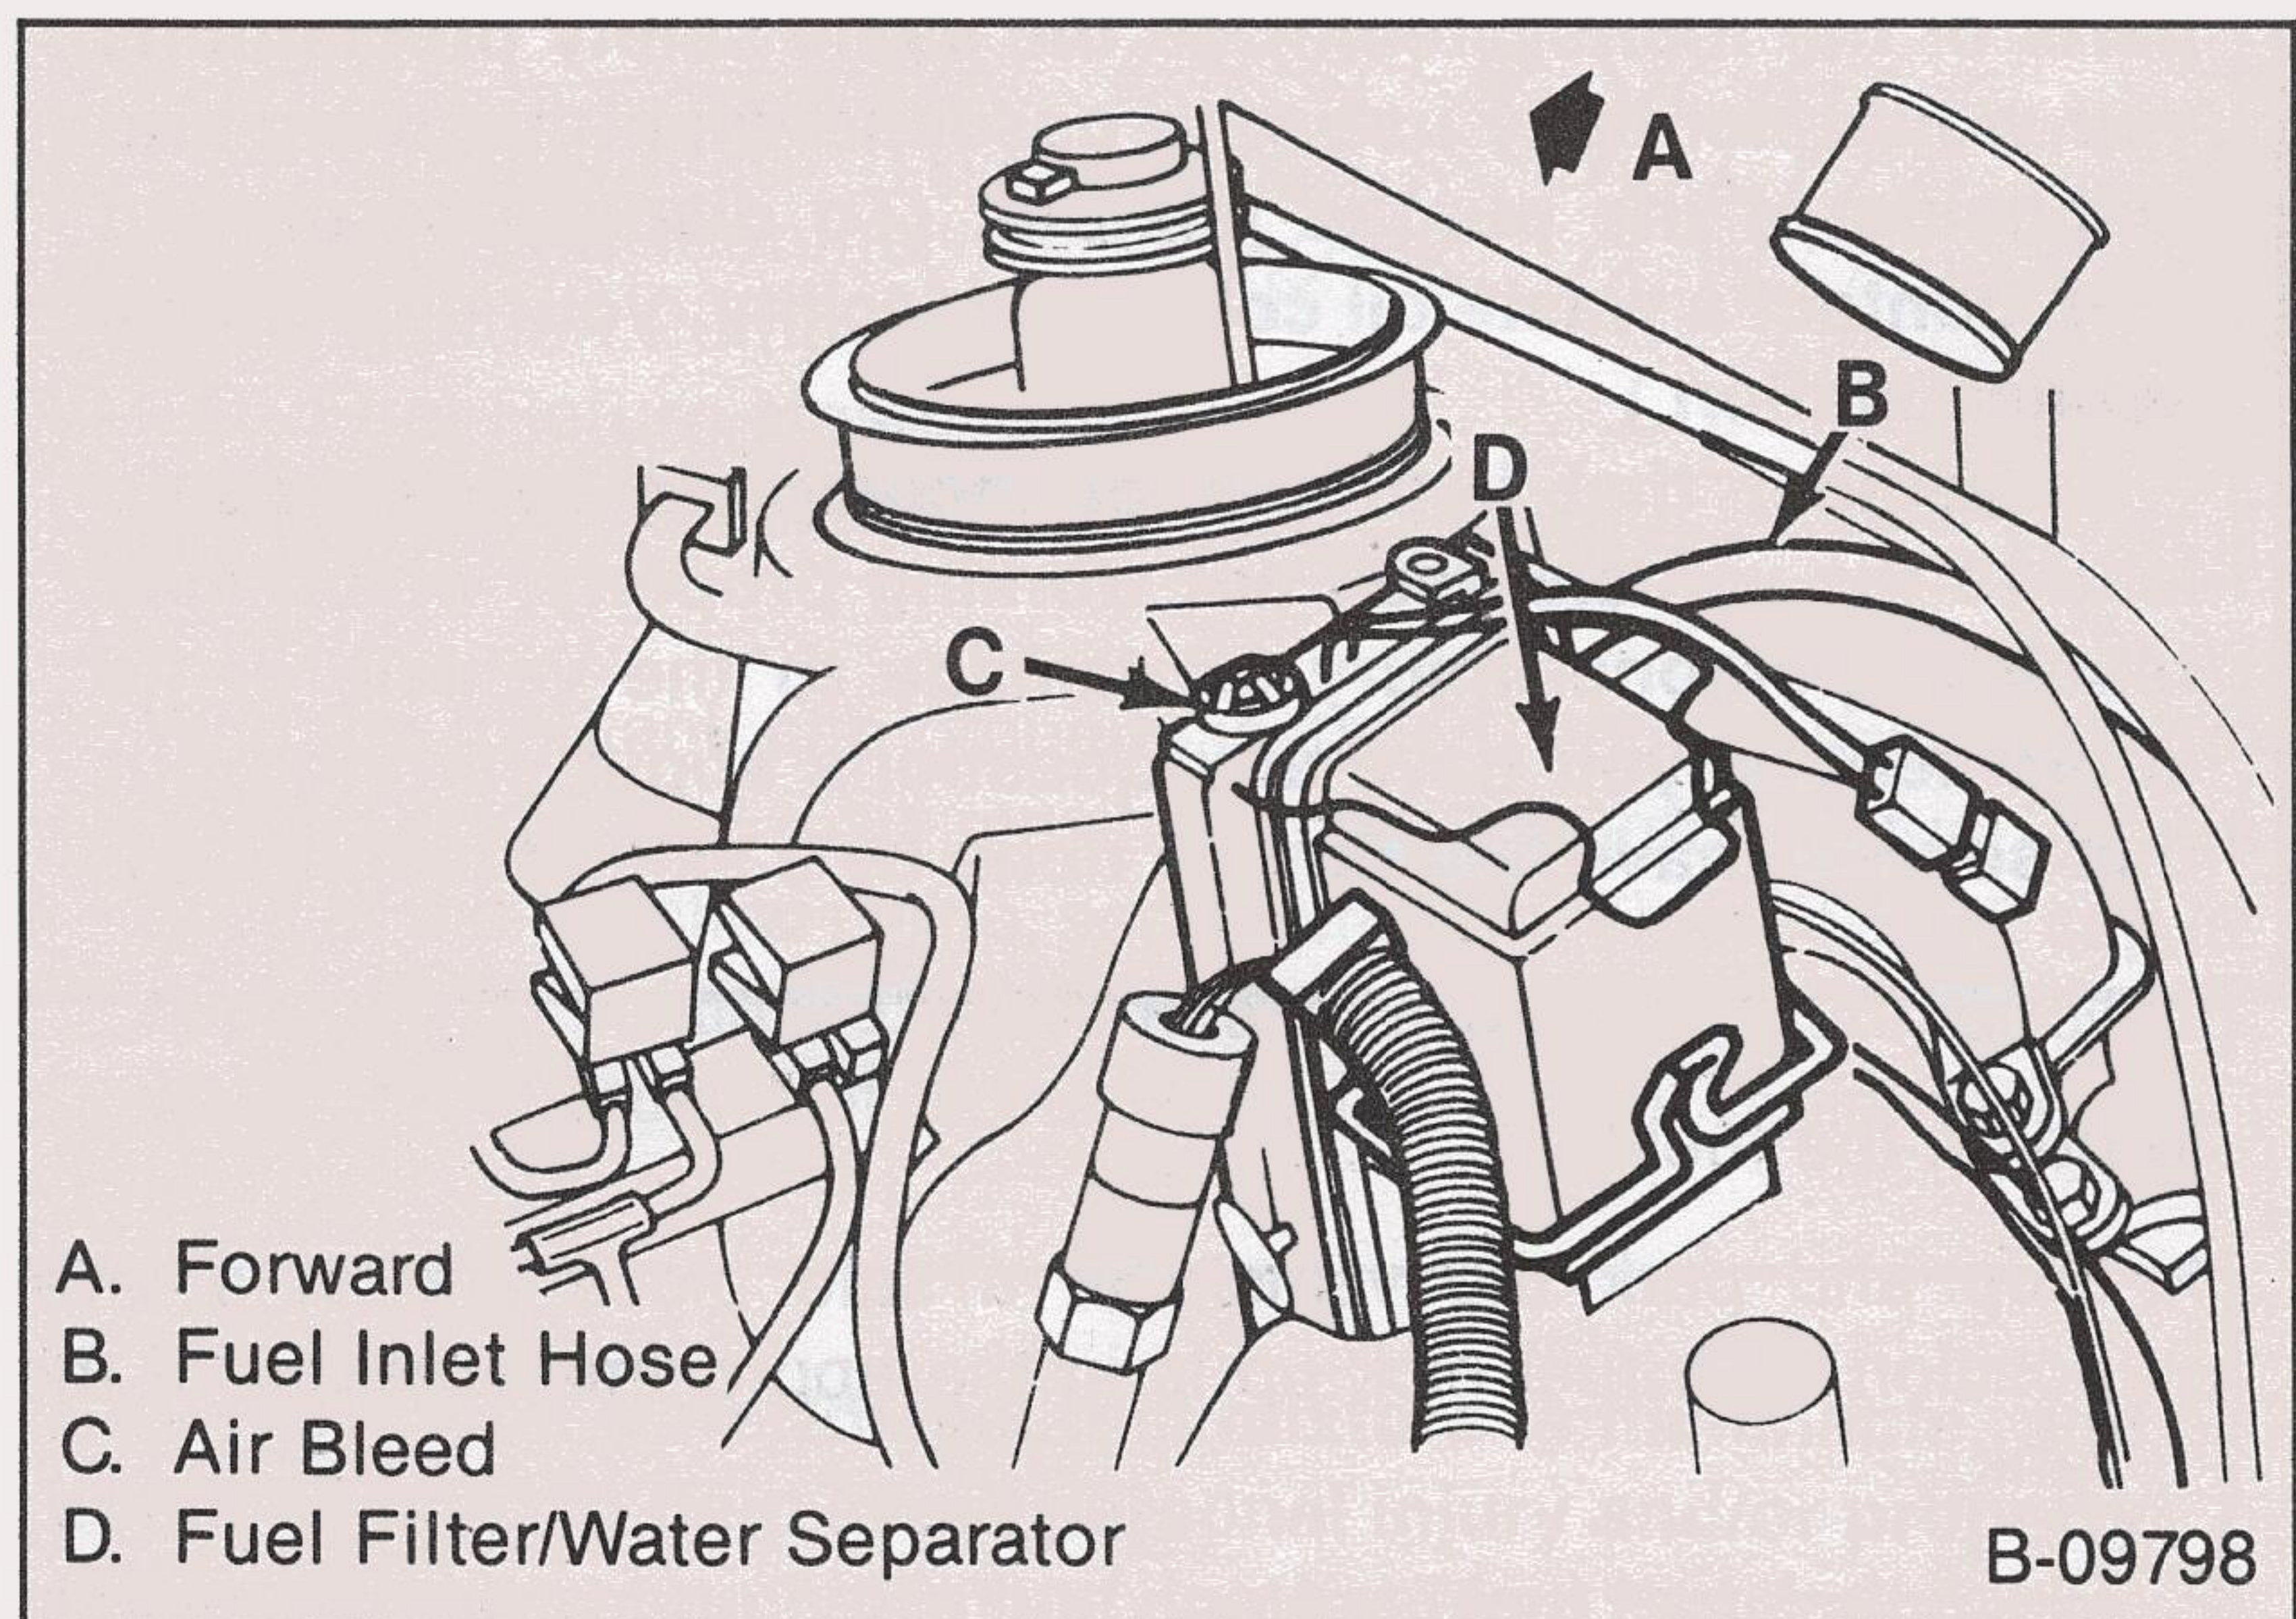

4. With the engine off, open the water drain valve 2-3 turns. (When standing in front of the vehicle, the valve is located on the righthand side of the thermostat housing).
5. Start engine — allow it to idle for about 1-2 minutes or until clear fuel is observed.
6. Stop engine and close water drain valve.
7. Install fuel tank cap. (Dispose of the drained mixture in a suitable manner; see “Used Oil Disposal” under “Engine Oil filter” (Diesel Engines) in Section 5 of this manual.)

If the “Water In Fuel” light comes on again after driving a short distance or the engine runs rough or stalls — a large amount of

water has probably been pumped into the fuel tank. The fuel tank should be purged.

FUEL TANK PURGE PROCEDURE (DIESEL ENGINES)


Your GM dealer can remove (purge) water from the fuel tank for you. If you wish, however, you can purge the fuel tank yourself by using the following procedure.

CAUTION: If you choose to purge the fuel tank yourself, use caution when working on or near the fuel tank or other parts of the fuel system. Use the same safety precautions you would normally use with gasoline when handling and disposing of the purged mixture. (To dispose of purged fuel, contact a waste oil collection facility, your dealer or a service station.)

Remember that improper or incomplete service could lead to the vehicle itself not working properly, which may result in personal injury or damage to the vehicle or its equipment. If you have any questions about carrying out this service, have the service done by a skilled technician.

To purge the fuel tank:

1. Stop and park the vehicle in a safe place and in a level position. The fuel pick up is in the approximate center of the tank.
2. Place a large fuel-resistant container under the filter drain hose. Open the drain 3-4 turns.

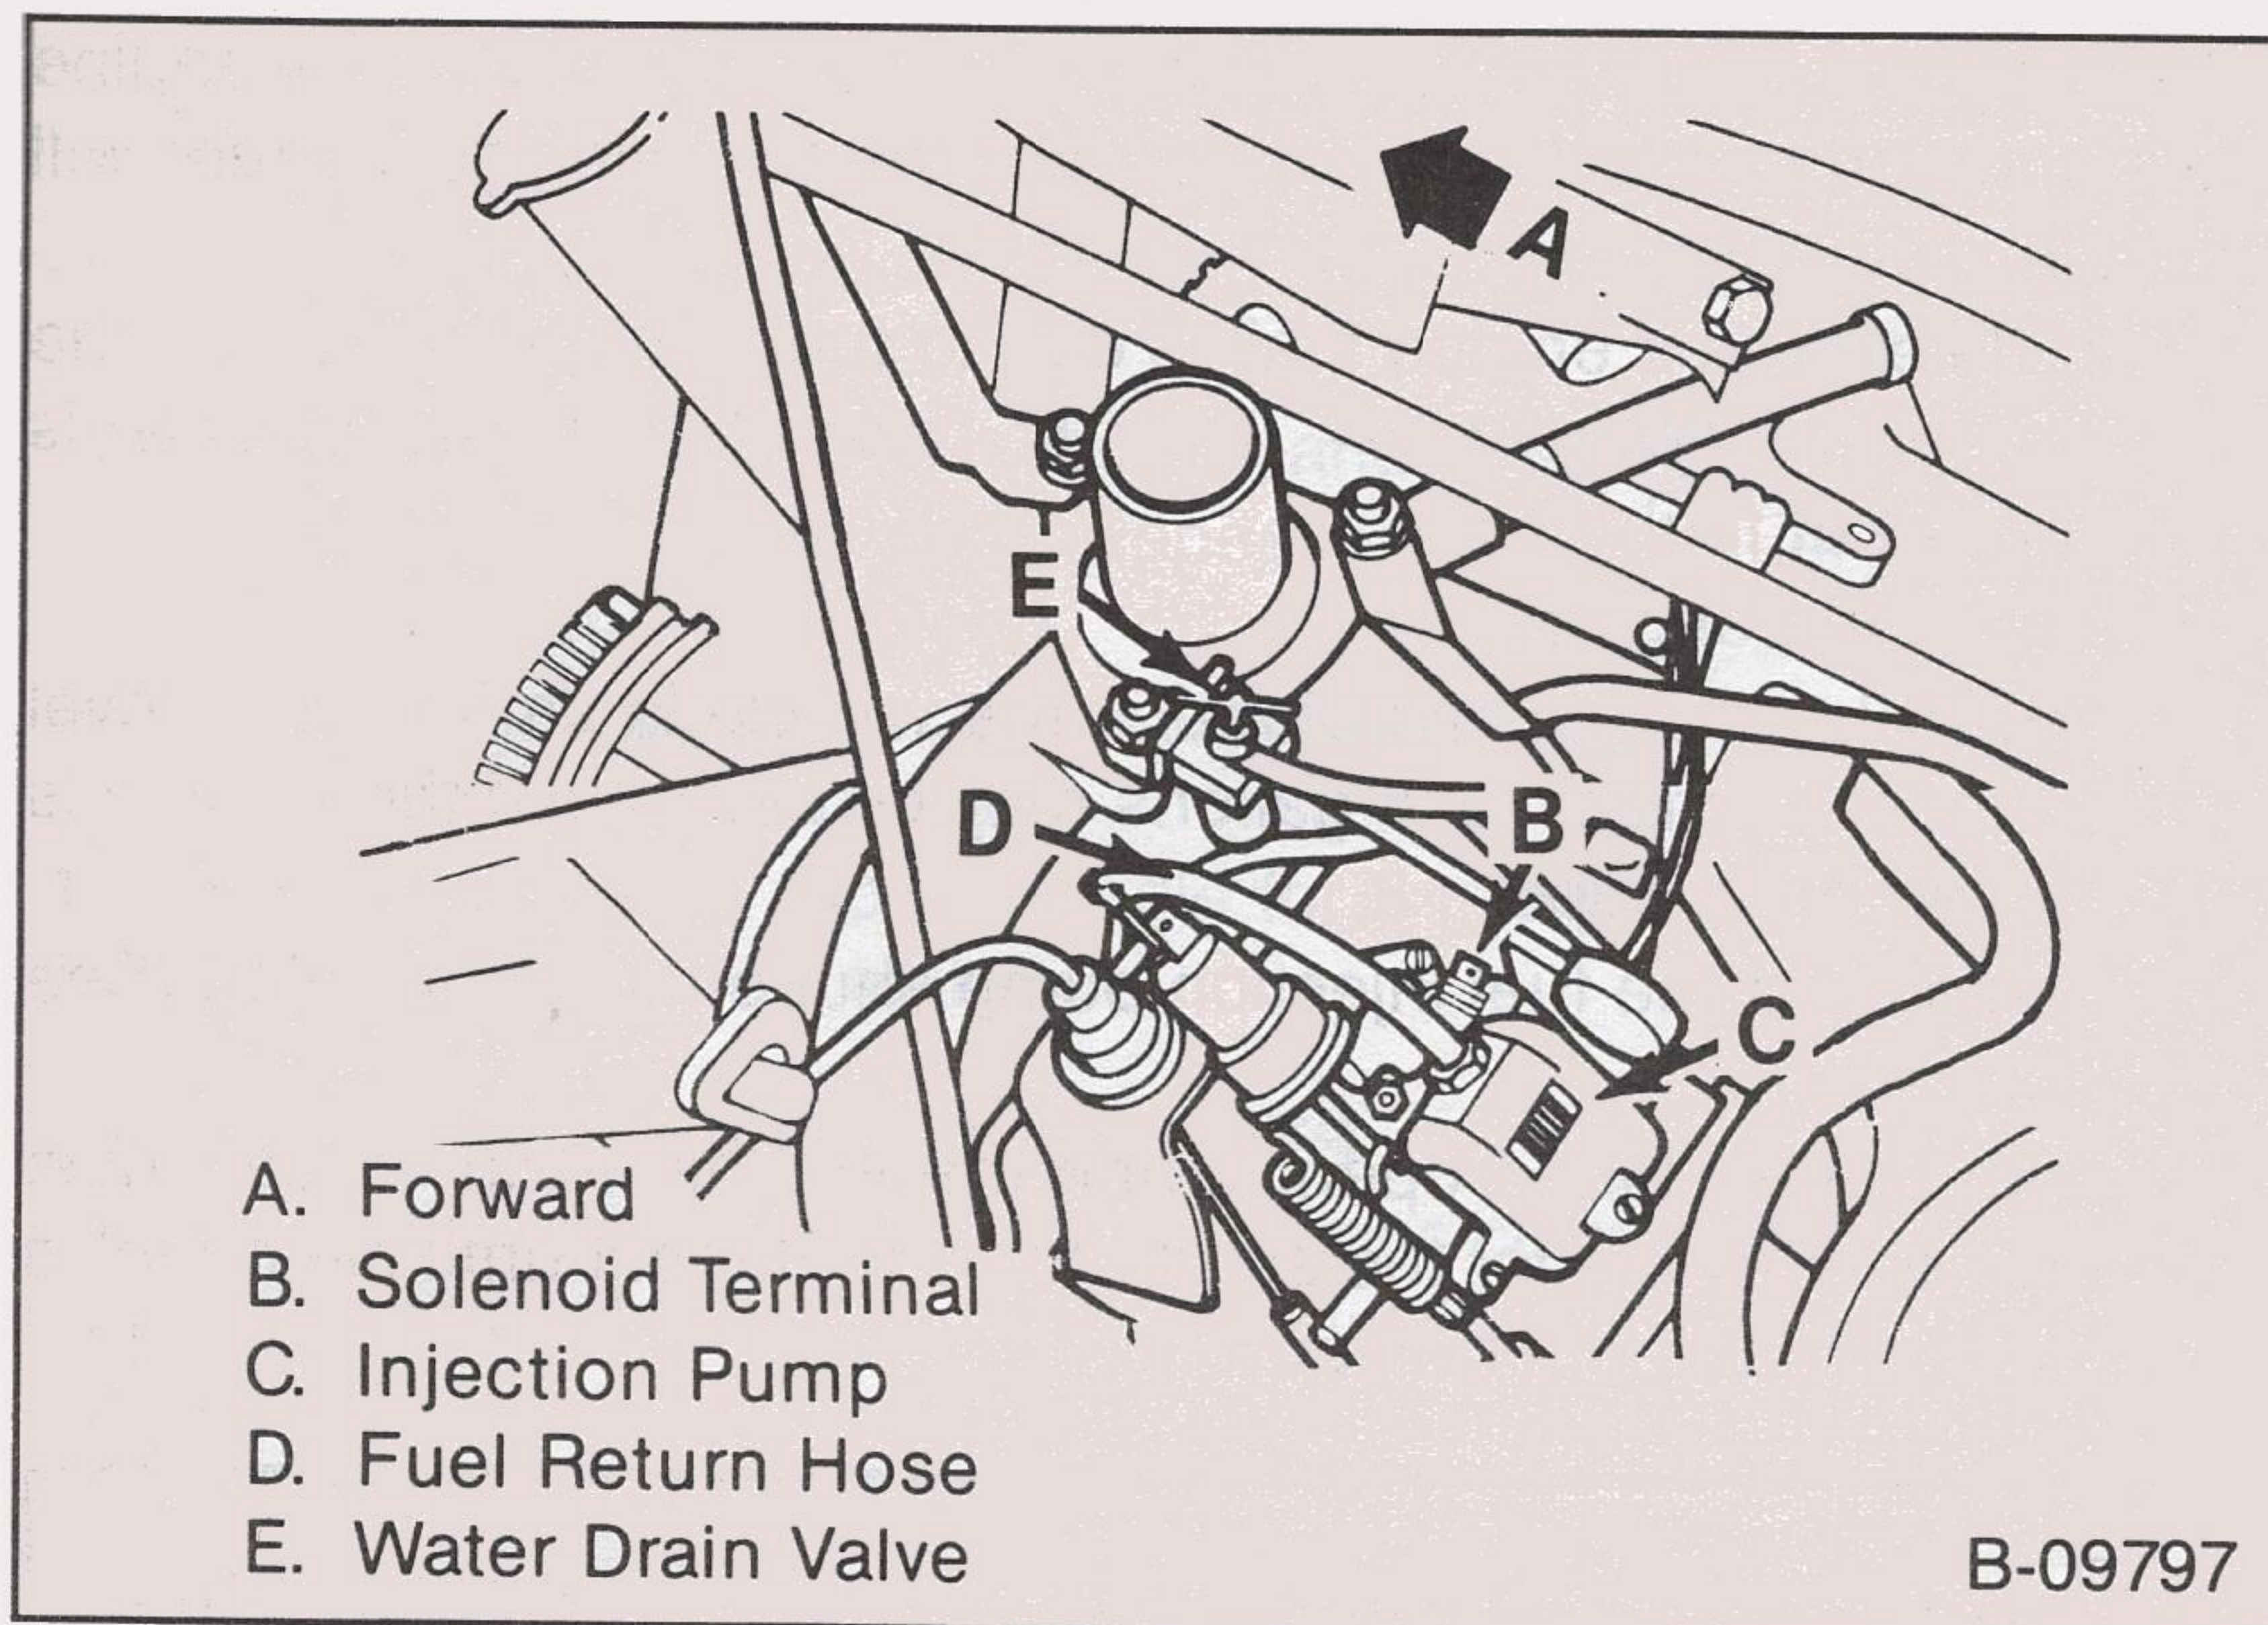

3. With the fuel tank cap properly installed, apply a low pressure 20.6-34.4 kPa (3-5 psi) maximum air through the fuel return hose at the injection pump, see illustration. The fuel tank cap is designed to retain 20.6-34.4 kPa (3-5 psi) pressure, allowing water to be forced out of the tank via the filter drain hose.

CAUTION: The water/diesel fuel mixture is flammable, and could be hot. To help avoid personal injury and/or property damage, do not touch the fuel coming from the drain hose, and do not expose the fuel to open flames or sparks.

Be sure you do not overfill the container. Heat (such as from the engine) can cause the fuel to expand. If the container is too full, fuel could be forced out of the container. This could lead to a fire and the risk of personal injury and/or vehicle damage.

4. Continue to drain until only clear fuel is observed — the complete contents of the tank may have to be drained.
5. Close drain valve tightly. Reinstall the fuel return hose.

FUEL EXHAUSTION—ENGINE STOPS (DIESEL ENGINES)

Care should be taken not to run out of fuel; however, if the engine stalls and you suspect fuel exhaustion, the following procedure will facilitate restarting.

First, determine if engine stall is due to fuel exhaustion. Open the fuel filter air bleed valve — if air is present then the vehicle is probably out of fuel.

To restart the engine:

1. Add at least 2 gallons of fuel if the vehicle is parked on a level surface; as much as 5 gallons may be required if the vehicle is parked on a slope.
2. Disconnect the fuel injection pump shut off solenoid wire. (See illustration).
3. With the air bleed open, crank the engine 10 to 15 seconds. Wait one minute for the starter to cool. Repeat until clear fuel is observed at the air bleed.

CAUTION: Do not allow too much fuel to flow from the bleeder. Diesel fuel is flammable, and may catch fire if dropped or left on hot engine parts. Use a cloth to wipe up any spilled fuel, before you try restarting the engine.

4. Close air bleed and reconnect injection pump solenoid wire.
5. Repeat cranking 10-15 seconds until engine starts.

FUEL FILTER—REPLACEMENT (DIESEL ENGINES)

The fuel filter is easily removed and installed with the use of a screw driver. To prevent fuel spillage — drain fuel from the filter by opening both the air bleed and water drain valve allowing fuel to drain out — into a fuel resistant container.

To remove the filter:

1. Stop and park the vehicle in a safe place. Turn off the engine and apply the parking brake.
2. Remove the fuel tank cap. This releases any pressure or vacuum in the tank.
3. Disengage both bail wires with a screw driver.
4. Remove the filter.
5. Clean any dirt off the fuel port sealing surface of the filter adapter and the new filter.
6. Install the new filter — snap into position with bail wires.

7. Close the water drain valve — and open the air bleed. Connect a 1/8" I.D. hose to the air bleed port and place the other end into a fuel resistant container.
8. Disconnect fuel injection pump shut off solenoid wire. (See illustration).
9. Crank engine for 10-15 seconds and then wait one minute for the starter motor to cool. Repeat until clear fuel is observed coming from the air bleed.
10. Close the air bleed, reconnect the injection pump solenoid wire and replace fuel tank cap.
11. Start engine and allow it to idle for 5 minutes.
12. Check fuel filter for leaks.

OPERATION IN FOREIGN COUNTRIES

If your vehicle has a Light Duty emissions class gasoline engine, it requires unleaded fuel. If your vehicle has a diesel engine, it requires diesel fuel. Fuel for your vehicle may not be available in other countries.

Before taking your vehicle to a foreign country, check to see if the proper fuel is available. Most major oil companies or domestic auto clubs should have this information. Foreign offices of major oil companies or auto clubs may also be of help. Be aware that use of leaded fuel or use of fuel that has a lower octane rating than is required by your vehicle will cause the emission control system to lose its effectiveness and can cause engine knock or serious engine damage. Neither GM International Export Sales nor GM will be responsible for damage to your vehicle as a result of using the improper fuel.

If you intend to take your vehicle outside the U.S. or Canada, contact GM International Export Sales, Service Department at the following address, to find out what you must do in order to operate your vehicle in other countries, or for additional information and a copy of the applicable maintenance schedule.

General Motors Corporation

International Export Sales

Service Department

Room 3-132

General Motors Building

Detroit, Michigan 48202

(313) 556-4862

When writing, please include:

- the Vehicle Identification Number and
- the countries in which you plan to travel.

If you have an optional diesel engine, refer to “Diesel Fuel Requirements and Fuel System” in Section 2.

IMPORTANT FACTS YOU SHOULD KNOW ABOUT FUEL ECONOMY AND HOW TO IMPROVE IT

How you drive, where you drive, and when you drive all affect how many miles/kilometers you can get from a gallon/liter of fuel. You can save fuel if you avoid “Jackrabbit” starts, maintain as constant a throttle position as traffic conditions allow once you have reached cruising speed, and avoid sudden stops which waste energy in the form of heat generated in braking. Frequent short trips, excessive idling and use of the air conditioner in cool weather (when “Vent” would provide adequate comfort), all can contribute to decreased fuel economy.

The careful attention you give your vehicle as far as maintenance and repairs are concerned will also help fuel economy. Proper engine and air cleaner maintenance, lubrication intervals, wheel alignment and tire inflation pressures, when closely adhered to, will pay dividends in improved fuel economy as well as longer vehicle life.

Fuel Selection (Gasoline Engines)

Use only unleaded gasoline in your Light Duty Emission Class Vehicle (see chart after “Fuel Requirements,” in this section) meeting the octane ratings given under “Fuel Requirements (Gasoline Engines)” in this section of the manual. Unleaded gasoline must be used for the emission control system to operate properly. Leaded gasoline will damage the Computer Command Control system (California only) oxygen sensor, reduce the effectiveness of the catalyst and affect emission control. Using leaded gasoline can also damage other parts of the emission control system and could result in loss of emission warranty coverage.

Your Heavy Duty Emission Class Vehicle engine (see chart after “Fuel Requirements” in this Section) is certified to meet all applicable emission requirements on regular grade leaded gasoline. See the fuel information given under “Fuel Requirements” in “Starting and Operating,” in this section.

Fuel Selection (Diesel Engines)

Use Number 2-D diesel fuel whenever possible; it will give better fuel economy than Number 1-D. Refer to “Diesel Fuel Requirements and Fuel System” in “Starting and Operating,” Section 2 of this manual for guidelines on selecting the proper fuel.

STARTING THE GASOLINE ENGINE

To start an optional diesel engine, see "Starting The Diesel Engine" which follows.

1. Apply the parking brake.
2. Automatic Transmission — Shift the transmission to Park or Neutral (Park preferred). A starter safety device is designed to keep the starter from operating if the shift lever is in any drive position. (If you need to restart the engine while the vehicle is moving, shift the transmission to Neutral.

Manual Transmissions — Push the clutch pedal to the floor and shift the transmission to Neutral. Hold the clutch pedal to the floor while you are starting the engine. A starter safety device is designed to keep the starter from operating if the clutch pedal is not pushed down all the way.

3. Start the engine as outlined below for different conditions.

NOTICE: Do not crank the engine for more than about 15 seconds at a time. Wait 10 to 15 seconds before trying again. This will help prevent damage to the starter.

- **COLD ENGINE:**

- Push down the accelerator pedal to the floor and slowly release it. With your foot off the pedal, crank the engine by turning the ignition key to "Start." Release the key when the engine starts.

If the engine does not start, or starts but fails to run, repeat this procedure.

When the engine is running smoothly (about 30 seconds), you can reduce the engine idle speed by pushing the accelerator pedal down, then slowly releasing it.

NOTICE: If the engine runs for a long time (5 minutes or more) without pushing the accelerator pedal down, overheating could cause damage to the engine and exhaust system.

- **WARM ENGINE:**

- Push down the accelerator pedal to 1/3 of its travel and hold. Crank the engine by turning the ignition key to "Start." Release the key and accelerator pedal when the engine starts.
 - Very Cold Weather (Below -18°C Or 0°F) Or After Vehicle Has Been Standing Idle Several Days — Before cranking the engine, fully push down and release the accelerator pedal one or two times more than stated for your engine under "Cold Engine" starting. Then, with your foot off the accelerator pedal, crank the engine by turning the ignition key to "Start." Release the key when the engine starts.
4. Apply the regular brakes and shift into the proper gear. Release the parking brake and drive off.

IF ENGINE FAILS TO START AFTER NORMAL STARTING PROCEDURE:

1. If you tried the cold engine starting procedure and the engine still did not start, then fully push down and release the accelerator pedal several times. Take your foot off the pedal and crank the engine by turning the key to "Start."
2. If you tried the warm engine starting procedure (or the cold engine procedure and Step 1 above), and the engine still does not start, push down the accelerator pedal to the floor and hold it there while cranking the engine. This should clear the engine if it is flooded.
3. If the engine has been flooded with too much fuel, it may start to run but not have enough power to keep running. In that case, continue cranking with the accelerator pedal all the way to the floor until the engine clears itself of excess gasoline and runs smoothly. But, do not crank more than 15 seconds at a time or you could damage the starter.

Gasoline Engine Block Heater

The optional gasoline engine block heater is designed to warm the block area for improved cold weather starting. It can also help reduce fuel consumption when a cold engine is warming up. (If you have an optional diesel engine, see "Cold Weather Starting" under "Starting the Diesel Engine" in Section 2 for information on the engine block heater.) To use the block heater:

1. Open the hood.
2. Unwrap the electrical cord which is stowed in the engine compartment.

3. Plug the cord into any three-prong, 110-volt outlet (normal household current).
4. After using the block heater, be sure to properly restow the cord, to help keep it away from moving engine parts.

NOTICE: IF the cord is too short, use a heavy-duty, three-prong extension cord. Do not use an extension cord such as you would use for a lamp because the cord may overheat.

Outside temperature, oil viscosity, etc., will affect how long the block heater should remain plugged in. Contact your authorized dealer for advice for the conditions in your area.

DRIVING THROUGH WATER (DIESEL ENGINES)

NOTICE: Do not drive through standing water more than 8 inches deep if your vehicle has a diesel engine. If you do, or if you drive through standing water faster than 5 mph (10 km/h), water can be sucked into the engine through the air intake. This can result in immediate and extensive engine damage.

OPERATION IN SNOW (DIESEL ENGINES)

Driving in a heavy snow storm, or in dry loose snow that may swirl around the front of the vehicle, will cause snow to be drawn into the air intake system. Continuing to operate your vehicle under these conditions may cause the air cleaner to plug causing excessive black smoke and loss of power. Should the air cleaner become plugged with snow in extreme conditions the air cleaner element can be removed to allow the vehicle to be driven to a place of safety.

STARTING THE DIESEL ENGINE

The following procedure is recommended for starting your diesel engine. Please note that a diesel engine starts differently from a gasoline engine.

1. Apply the parking brake.

2. Automatic Transmissions — Shift the transmission to Park or Neutral (Park preferred). A starter safety device is designed to keep the starter from operating if the shift lever is in any drive position. (If you need to re-start the engine while the vehicle is moving, shift the transmission to Neutral).

Manual Transmission — Push the clutch pedal to the floor and shift the transmission to Neutral. Hold the clutch pedal to the floor while you are starting the engine. A starter safety device is designed to keep the starter from operating if the clutch pedal is not pushed down all the way.

3. Turn the ignition key to “Run.” Do not turn it to “Start.” With the ignition in “Run,” the “GLOW PLUGS” light will come on. This tells you that small heating elements, called “glow plugs,” are warming part of the engine for improved starting. When the engine is ready to start, the “GLOW PLUGS” light will go out.

If the engine is warm, the “GLOW PLUGS” light may not come on. This is normal.

During cranking, and/or after starting, the “GLOW PLUGS” light may cycle on and off a few times. This is normal; however, if the light cycles continuously, you should contact your authorized dealer as soon as practical.

4. With the “GLOW PLUGS” light out, if the temperature is more than 0°C (32°F), press down the accelerator pedal halfway and hold; if the temperature is less than 0°C (32°F), press the accelerator pedal to the floor and hold; then crank the engine by turning the ignition key to “Start.” Release the key and accelerator when the engine starts.

Pumping the accelerator pedal before or during cranking will not aid in starting, and could keep the engine from starting.

NOTICE: If the engine does not start after cranking 10 to 15 seconds, release the ignition key. Wait one minute for the starter to cool; then repeat Step 4. If attempting to start the engine after running out of fuel, refer to the “Notice” under “Fuel Requirements” in this section.

Do NOT use starting “aids” in the air intake system. Such “aids” can cause immediate engine damage.

To restart the engine if you have run out of fuel, “Fuel Exhaustion” under “Diesel Fuel Requirements and Fuel System.”

When the engine is cold, let it run for a few seconds before moving the vehicle. This will allow oil pressure to build up. Increased operating noise and light smoke are normal when the engine is cold.

5. Apply the regular brakes and shift into the proper gear. Release the parking brake and drive off.

NOTICE: Do not leave your vehicle unattended with the engine running. If the engine should overheat, you would not be there to react to the “TEMP” warning light or gage. This could result in costly damage to your vehicle and its contents.

While you are waiting for the “GLOW PLUGS” light to go out, fasten your seat belt and ask your passengers to do the same.

COLD WEATHER STARTING (DIESEL ENGINES)

If you plan ahead for cold weather, starting and driving your vehicle should be no problem. The following tips will help assure good starting in cold weather.

Oil gets thicker as its gets colder, which slows down the engine cranking speed. Your diesel engine runs through the heat of compression (and glow plugs when cold), rather than through the use of spark plugs as in a gasoline engine. So, your engine must crank faster than a gasoline engine before it will start.

To be sure the engine can turn fast enough to start, use SAE 10W-30 viscosity engine oil when prevailing temperatures drop below 0°C (32°F). (See the oil quality and oil viscosity

recommendations in Section 5.) Using the proper viscosity oil will make starting easier down to -18°C (0°F). When prevailing temperatures drop below -18°C (0°F), the engine block heater may be needed for starting.

If you park your vehicle in a garage, you should not need to use the block heater until the garage temperature drops below -18°C (0°F), regardless of outside temperatures.

The engine block heater is designed to warm the block area, which will let the engine turn faster. To use the block heater:

- 1. Open the hood.
- 2. Unwrap the electrical cord located in the engine compartment.
- 3. Plug the cord into any three-prong 110 volt outlet (normal household current).
- 4. After using the block heater, be sure to restow the cord properly, to help keep it away from moving engine parts.

NOTICE: If the cord is too short, use a heavy-duty, three-prong extension cord. Do not use an extension cord such as you would use for a lamp because the cord may overheat.

Use the block heater as shown in the chart:

ENGINE BLOCK HEATER USAGE *		
Viscosity Grade Oil	23° to 0°F (0° to -18°C)	Below 0°F (Below -18°C)
30	2 Hours Minimum	8 Hours Minimum
15W-40	Not Required	8 Hours Minimum
10W-30	Not Required	8 Hours Minimum

* The times listed are minimum times. It will not harm either the block heater or the vehicle to leave it plugged in longer than the times stated.

B-09800

In cold weather when the vehicle is to be parked for an extended period of time (overnight), the engine-block heater may be used to reduce the engine warm-up time, and consequently, reduce the heater warm-up time.

At temperatures below -7°C (20°F), Number 2-D diesel fuel may clog the fuel filter. This is normally caused by paraffin in the fuel turning into wax as it gets colder. If the engine starts but stalls out after a short time and will not re-start, the fuel filter may be clogged. For best results in cold weather, use Number 1-D diesel fuel or a "winterized" Number 2-D fuel. (For more information, refer to "Diesel Fuel Requirements and Fuel System" in this section.)

IF ENGINE FAILS TO START

1. Do not use starting "aids," such as ether or gasoline, in the air intake. Such "aids" can cause immediate engine damage.
2. Turn the ignition key to "Run." Check that the "GLOW PLUGS" light is out before turning the ignition key to "Start."
3. If the "GLOW PLUGS" light fails to go out, there may be a system malfunction. If this happens, you can usually still start the engine after waiting a few seconds, but you should contact your dealer as soon as practical for a starting system check.
4. Be sure you have the proper viscosity oil and that you have changed it at the recommended intervals. Using oil of improper viscosity may make starting more difficult.
5. If your batteries do not have enough charge to start the engine, see Section 3.
6. If the "GLOW PLUGS" light is out and your batteries are sufficiently charged, but the engine will not start, contact your dealer.
7. If the engine starts, runs a short time, then stops, wax forming in the fuel could be plugging the filter. (This can happen if you use the improper fuel at colder temperatures.) If this happens, contact your dealer. (For more information, see "Diesel Fuel Requirements and Fuel System" in this section.)
8. If you have run out of fuel, follow the starting procedure under "Fuel Exhaustion" in "Diesel Fuel Requirements and Fuel System" in this section.

GUARD AGAINST THEFT

Your new Van has many features to help prevent theft of the vehicle, its equipment, and contents. But these anti-theft features depend upon you to work.

The time to be most on guard is when leaving the vehicle:

1. Park in a lighted spot when you can.
 - Be sure to turn your steering wheel sharply to one side to help prevent towing of this vehicle from the rear.
2. Lock the steering column and take the keys:
 - Turn the key to "Lock" while depressing the key release lever (if so equipped) and remove the key. This locks the ignition and both steering and shift controls, unless your truck has a floor-shift manual transmission. In that case, the shift control is not locked.
 - If you must leave a key with the vehicle, leave the square-head key only. Take the oval-head key with you. This will help prevent unwanted entry into your vehicle or any locked compartment at a later date.
3. Keep items that may appear to be of value out of sight and locked up when possible.
4. Fully close all windows and lock all doors.

PARKING

CAUTION: Before the driver leaves this vehicle, to reduce the risk of personal injury as a result of vehicle movement:

1. Firmly apply the parking brake first. (See "Torque Lock" in this section.)
2. Shift the automatic transmission to Park or the manual transmission to Reverse.
3. Turn the key to "Lock." On vehicles with floor-shift manual transmissions, depress the key release lever and turn the key to "Lock."
4. Remove the key (the buzzer is designed to remind you).
5. Be sure the vehicle is not moving before you leave the driver's seat.
6. To reduce the chance of personal injury and/or vehicle damage due to engine overheating, never leave the engine idling without an alert driver present. If the engine should overheat, as indicated by the Engine Coolant Temperature light or gage, immediate action is required to correct the condition. Continued operation of the engine even for a short time may result in a fire.

VEHICLE OPERATION

NOTICE: It is not recommended that this vehicle be parked, or idled or operated over combustible materials such as grass or leaves. They could touch the hot exhaust system and start a fire. This is particularly important if the exhaust system has not been properly maintained. Combustible materials could catch fire from hot exhaust gases, soot, or sparks that could escape through corrosion holes or cracks.

If operating, parking or idling your vehicle off-road is unavoidable, such as in farming, lumbering, or commercial or recreational use:

- The driver should be aware that combustible materials could catch fire from the vehicle's hot exhaust system.
- Carry a fire extinguisher with the vehicle at these times.
- Avoid driving your vehicle through or over combustible materials such as leaves, grass, vegetation or stubble high enough to touch, catch or collect on its hot exhaust system.
- Parking or idling should be done only in an area where there are no combustible materials under the vehicle.

Failure to follow these instructions could damage your vehicle or nearby property.

TRANSMISSION

DRIVING ON SLIPPERY SURFACES

While driving on a slippery surface avoid sudden acceleration or engine braking actions (due to shifting to a lower gear). Such actions could cause the wheels to skid. Skid correction is called for at these times.

DESCENDING A GRADE

CAUTION: To reduce the risk of personal injury, before going down a steep or long grade reduce speed and shift the automatic transmission to low or manual transmission to next lower gear. Do not hold the brake pedal down too long or too often while going downhill. This could cause the brakes to get hot and not work as well. As a result, the vehicle will not slow down at the usual rate. Failure to take these steps could result in loss of vehicle control.

AUTOMATIC TRANSMISSIONS

Automatic transmissions replace the standard clutch and transmission. After starting the engine with the selector lever in “P” (Park) or “N” (Neutral) position, select the range desired (see table) and depress the accelerator. A gradual start with a steady increase in accelerator pressure will result in best possible fuel economy. Rapid acceleration for fast starts will result in greater fuel consumption.

AUTOMATIC TRANSMISSION — 3 SPEED

P—(PARK)	This position is used to lock the transmission when the vehicle is parked or while starting the engine. Never move the shift lever to Park until your vehicle is fully stopped. Use this position together with the parking brake.
R—(REVERSE)	This position is used for backing the vehicle. Bring your vehicle to a complete stop before shifting to Reverse.
N—(NEUTRAL)	This is the out-of-gear position. You may restart a stalled engine while the vehicle is still moving with the selector in Neutral. This position is also used when towing the vehicle. Refer to "In Case of Emergency" section for towing facts.
D—(DRIVE)	Use this position for all normal forward driving. Forced downshifts—with the selector in "D" you can get an automatic downshift at speeds under 35 mph (60 km/h) by pressing the accelerator approximately halfway to the floor. You will also get a forced downshift at speeds above 35 mph (60 km/h) by pressing the pedal all the way to the floor. This will give you increased acceleration for passing maneuvers.
2—(LOW 2)	This range is used when extra performance is required for hill climbing or it can also be used to provide "engine braking" to slow the vehicle when going down medium grades. The shift lever may be moved from "D" to "2" (and vice versa) under most driving conditions.
1—(LOW 1)	This position is used to provide maximum engine braking when driving down very sharp grades or when maximum performance is required to climb a steep hill or run through deep snow or mud. You may shift into 1 at any speed but the transmission will not lock into Low until vehicle speed is under 40 mph (65 km/h).

B-09655

AUTOMATIC OVERDRIVE TRANSMISSION 4-SPEED SHIFT QUADRANT POSITIONS

P (PARK)	This position is used to lock the transmission when the vehicle is parked or while starting the engine. Never move the shift lever to Park until your vehicle is fully stopped. Use this position together with the parking brake.
R (REVERSE)	This position is used for backing the vehicle. Bring your vehicle to a complete stop before shifting to Reverse.
N (NEUTRAL)	This is the out-of-gear position. You may restart a stalled engine while the vehicle is still moving with the selector in Neutral. This position is also used when towing the vehicle. Refer to "In Case of Emergency" section for towing facts.
D OVERDRIVE	This is the overdrive gear range position, used for most normal driving. This position lets the transmission choose the appropriate gear for load driving conditions. Also, the transmission is designed to shift automatically into overdrive (from Drive) when the vehicle reaches a steady cruising speed of about 40 mph (65 km/h) or faster.
D (THIRD GEAR) *	On vehicles with the overdrive transmission, "D" is the same as "D" on vehicles without an overdrive feature and should be used when increased performance is needed, such as on hilly roads or when towing a trailer. It prevents the transmission from shifting into overdrive. It also provides more "engine braking" than D range. You should shift to "D" range when driving on slippery surfaces to help avoid unexpected downshifts (out of overdrive) which may occur on slippery surfaces. Refer to "Driving on Slippery Surfaces" in this section.

B-09901

AUTOMATIC OVERDRIVE TRANSMISSION 4-SPEED SHIFT QUADRANT POSITIONS (Cont.)

D (THIRD GEAR) * (Cont.)	You should also shift to "D" if you notice what feels like excessive shifting between ranges. This could be caused by over engaging and disengaging of the overdrive, or of the torque converter clutch. This is normal under certain driving conditions; shifting from D to "D" should bring improvement. (When driving conditions change, shift back to D for improved fuel economy.)
2 (SECOND GEAR)	This range is used when extra performance is required for hill climbing or it can be used to provide "engine braking" to slow the vehicle when going down medium grades. The shift lever may be moved from "D" to "2" (and vice versa) under most driving conditions.
1 (FIRST GEAR)	This position is used to provide maximum engine braking when driving down very sharp grades or when maximum performance is required to climb a steep hill or run through deep snow or mud. You may shift into "1" at any speed but the transmission will not lock into Low until the vehicle speed is under 40 mph (65 km/h).

- * If you need more power for passing, you can force the transmission to downshift by fully pressing the accelerator pedal.

B-09902

Automatic transmission shift quadrants of all GM vehicles continue the uniform sequence of selector positions. Shift indicators are arranged with “P” (Park) position at one end, followed in sequence by “R” (Reverse), “N” (Neutral) and the forward driving ranges. All automatic transmissions are equipped with a starter safety switch designed to permit starting the engine only when the transmission selector is in the “P” (Park) or “N” (Neutral) position. For additional engine braking effect, as sometimes needed in mountainous driving, place the transmission in a low range.

AUTOMATIC OVERDRIVE TRANSMISSION

If this vehicle has an overdrive transmission, the gear range indicator will have a **D**. Overdrive transmissions have two drive ranges. Refer to chart “Automatic Overdrive Transmission — 4-Speed” in this section.

Your automatic transmission may have either a clutch-type torque converter or an open-type torque converter. Both offer the quality performance associated with General Motors products.

If so equipped, the converter clutch is designed to automatically engage when the vehicle reaches a steady speed of about 25 mph (40 km/h) or higher depending on the particular model. When engaged, the clutch provides a direct connection between the engine and the drive wheels. This direct connection allows for more efficient operation of the transmission and thereby contributes to improved fuel economy.

With the clutch-type converter, you may notice some operational differences compared to other automatic transmission equipped vehicles. When the clutch engages, for example, you may notice what feels like an extra transmission shift. Also, on occasion, you may feel certain incidental engine pulsations in the 30 to 50 mph (50 to 80 km/h) range. This feel is similar to that sometimes experienced in a manual transmission equipped vehicle. In addition, when the accelerator pedal is released abruptly, you may feel a slight impulse before the clutch disengages.

These conditions are normal. They have no adverse effect on your vehicle and do not indicate the need for repairs.

NOTICE: The following practices could result in automatic transmission failure:

- Shifting between forward and reverse driving range while operating the engine at high speed or heavy throttle, such as when the driving wheels are on snow or ice — commonly called “rocking.” (See the correct method for “rocking” a vehicle under “Freeing Vehicle from Sand, Mud, Snow or Ice” in Section 3.)
- Shifting to “R” (Reverse) or any forward range while operating the engine at high speed in “N” (Neutral) or “P” (Park).
- Shifting to “P” (Park) while the vehicle wheels are still turning.
- Operating the transmission at or near “stall condition” for more than 10 seconds at a time. (“Stall condition” is when the engine is running at high speed while the transmission is in a driving range and the drive wheels aren’t moving, such as when stuck in deep sand or when the vehicle is against a fixed barrier.)
- Holding vehicle on an upgrade with the accelerator pedal. (Use the regular brakes to hold vehicle on an uphill grade.)

MANUAL TRANSMISSION

For the best compromise between vehicle performance and fuel economy, upshift the transmission as recommended in the following chart.

Manual Transmission Recommended Shift Speed in MPH (km/h)			
Engine and Transmissions	Acceleration Shift Speeds		
	1 to 2	2 to 3	3 to 4
4.3 L (V6) Engine Code: N 5.0 L (V8) Engine Code: H 3-Speed	15 (24)	40 (64)	—
4.3 L (V6) Engine Code: N 5.0 L (V8) Engine Code: H 4-Speed (1)	15 (24)	40 (64)	50 (80)
6.2 L (V8) Engine Code: C 4-Speed (1)	15 (24)	40 (64)	45 (72)
Engine and Transmissions	Cruise Shift Speed		
	1 - 2	2 - 3	3 - 4
4.3 L (V6) Engine Code: N 5.0 L (V8) Engine Code: H 3-Speed	—	25-40 (40-64)	—
4.3 L (V6) Engine Code: N 5.0 L (V8) Engine Code: H 4-Speed (1)	—	25-40 (40-64)	—
6.2 L (V8) Engine Code: C 4-Speed (1)	—	25-40 (40-64)	—

(1) 4-Speed manual with overdrive fourth gear.

B-09654

Shift at the highest vehicle speed listed unless you have reached cruising speed. (Cruising speed is a relatively steady speed which includes slight variations in speed to allow for road and traffice conditions.) For cruise, use the highest gear for that speed.

If vehicle speed drops below 20 mph (30 km/h), or if the engine is not running smoothly, you should downshift to the next lowest gear. You may need to downshift two or more gears to keep the engine running smoothly or for satisfactory performance.


DRIVING PRECAUTIONS—MANUAL TRANSMISSIONS

- When stopped on an upgrade, do not hold vehicle with engine. Use parking or regular brakes.
- Shift to next lowest gear for extremely hard pulls at low road speed.
- Shift the gears with a moderate effort to allow time for the transmission synchronizers to coordinate.
- Do not ride clutch pedal; this produces a partly disengaged condition that will result in damage to your clutch.
- Downshift one or two gears from high gear when driving at slow speeds (less than 30 mph or 50 km/h) in stop-and-go traffic for improved vehicle performance during acceleration and when descending steep grades.


- Do not coast in “Neutral” (illegal in many states).
- Set parking brake firmly before leaving vehicle.

THREE-SPEED

The transmission shift lever extends from the floor. Shifts into first gear may be made when the vehicle is operating at less than 20 mph (30 km/h).

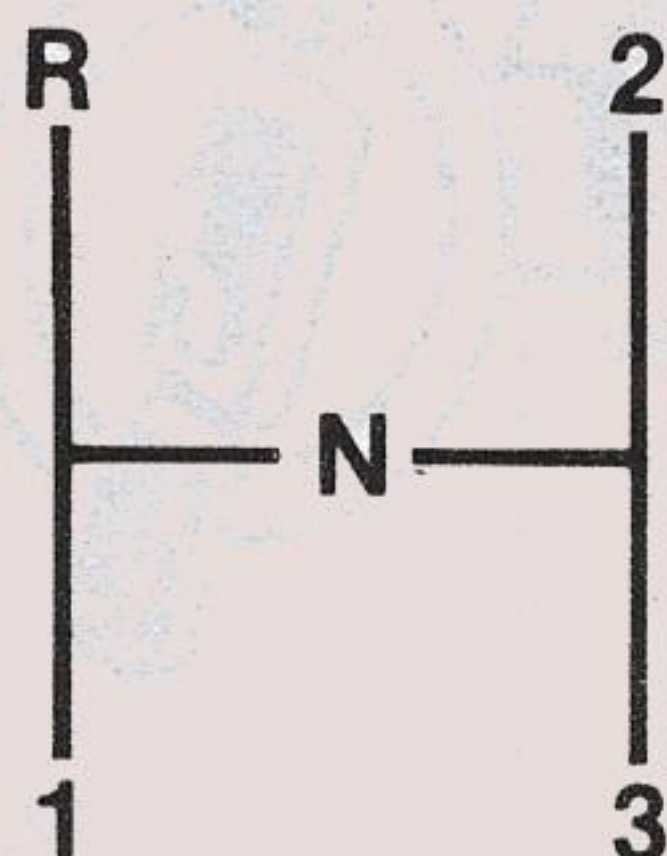

3-SPEED

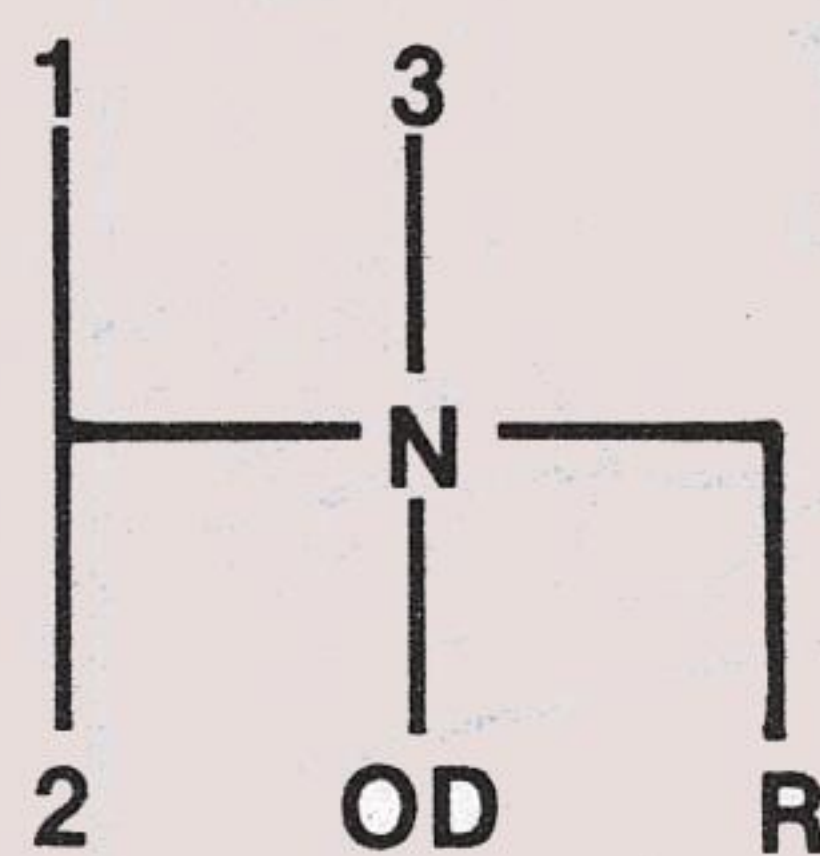

4-SPEED-OVERDRIVE

B-09609

FOUR SPEED — OVERDRIVE


This transmission has an overdrive fourth gear for greater fuel economy at highway speeds.

STEERING COLUMN CONTROLS

ANTI-THEFT STEERING COLUMN LOCK

CAUTION: On vehicles with floor-shift manual transmissions, if you need to turn off the engine while the vehicle is moving, turn the key only to “Off.” DO NOT depress the key release lever while turning the ignition off. This will lock the steering column and result in loss of ability to steer the vehicle.

The anti-theft lock (ignition) on the right side of the steering column has five positions:

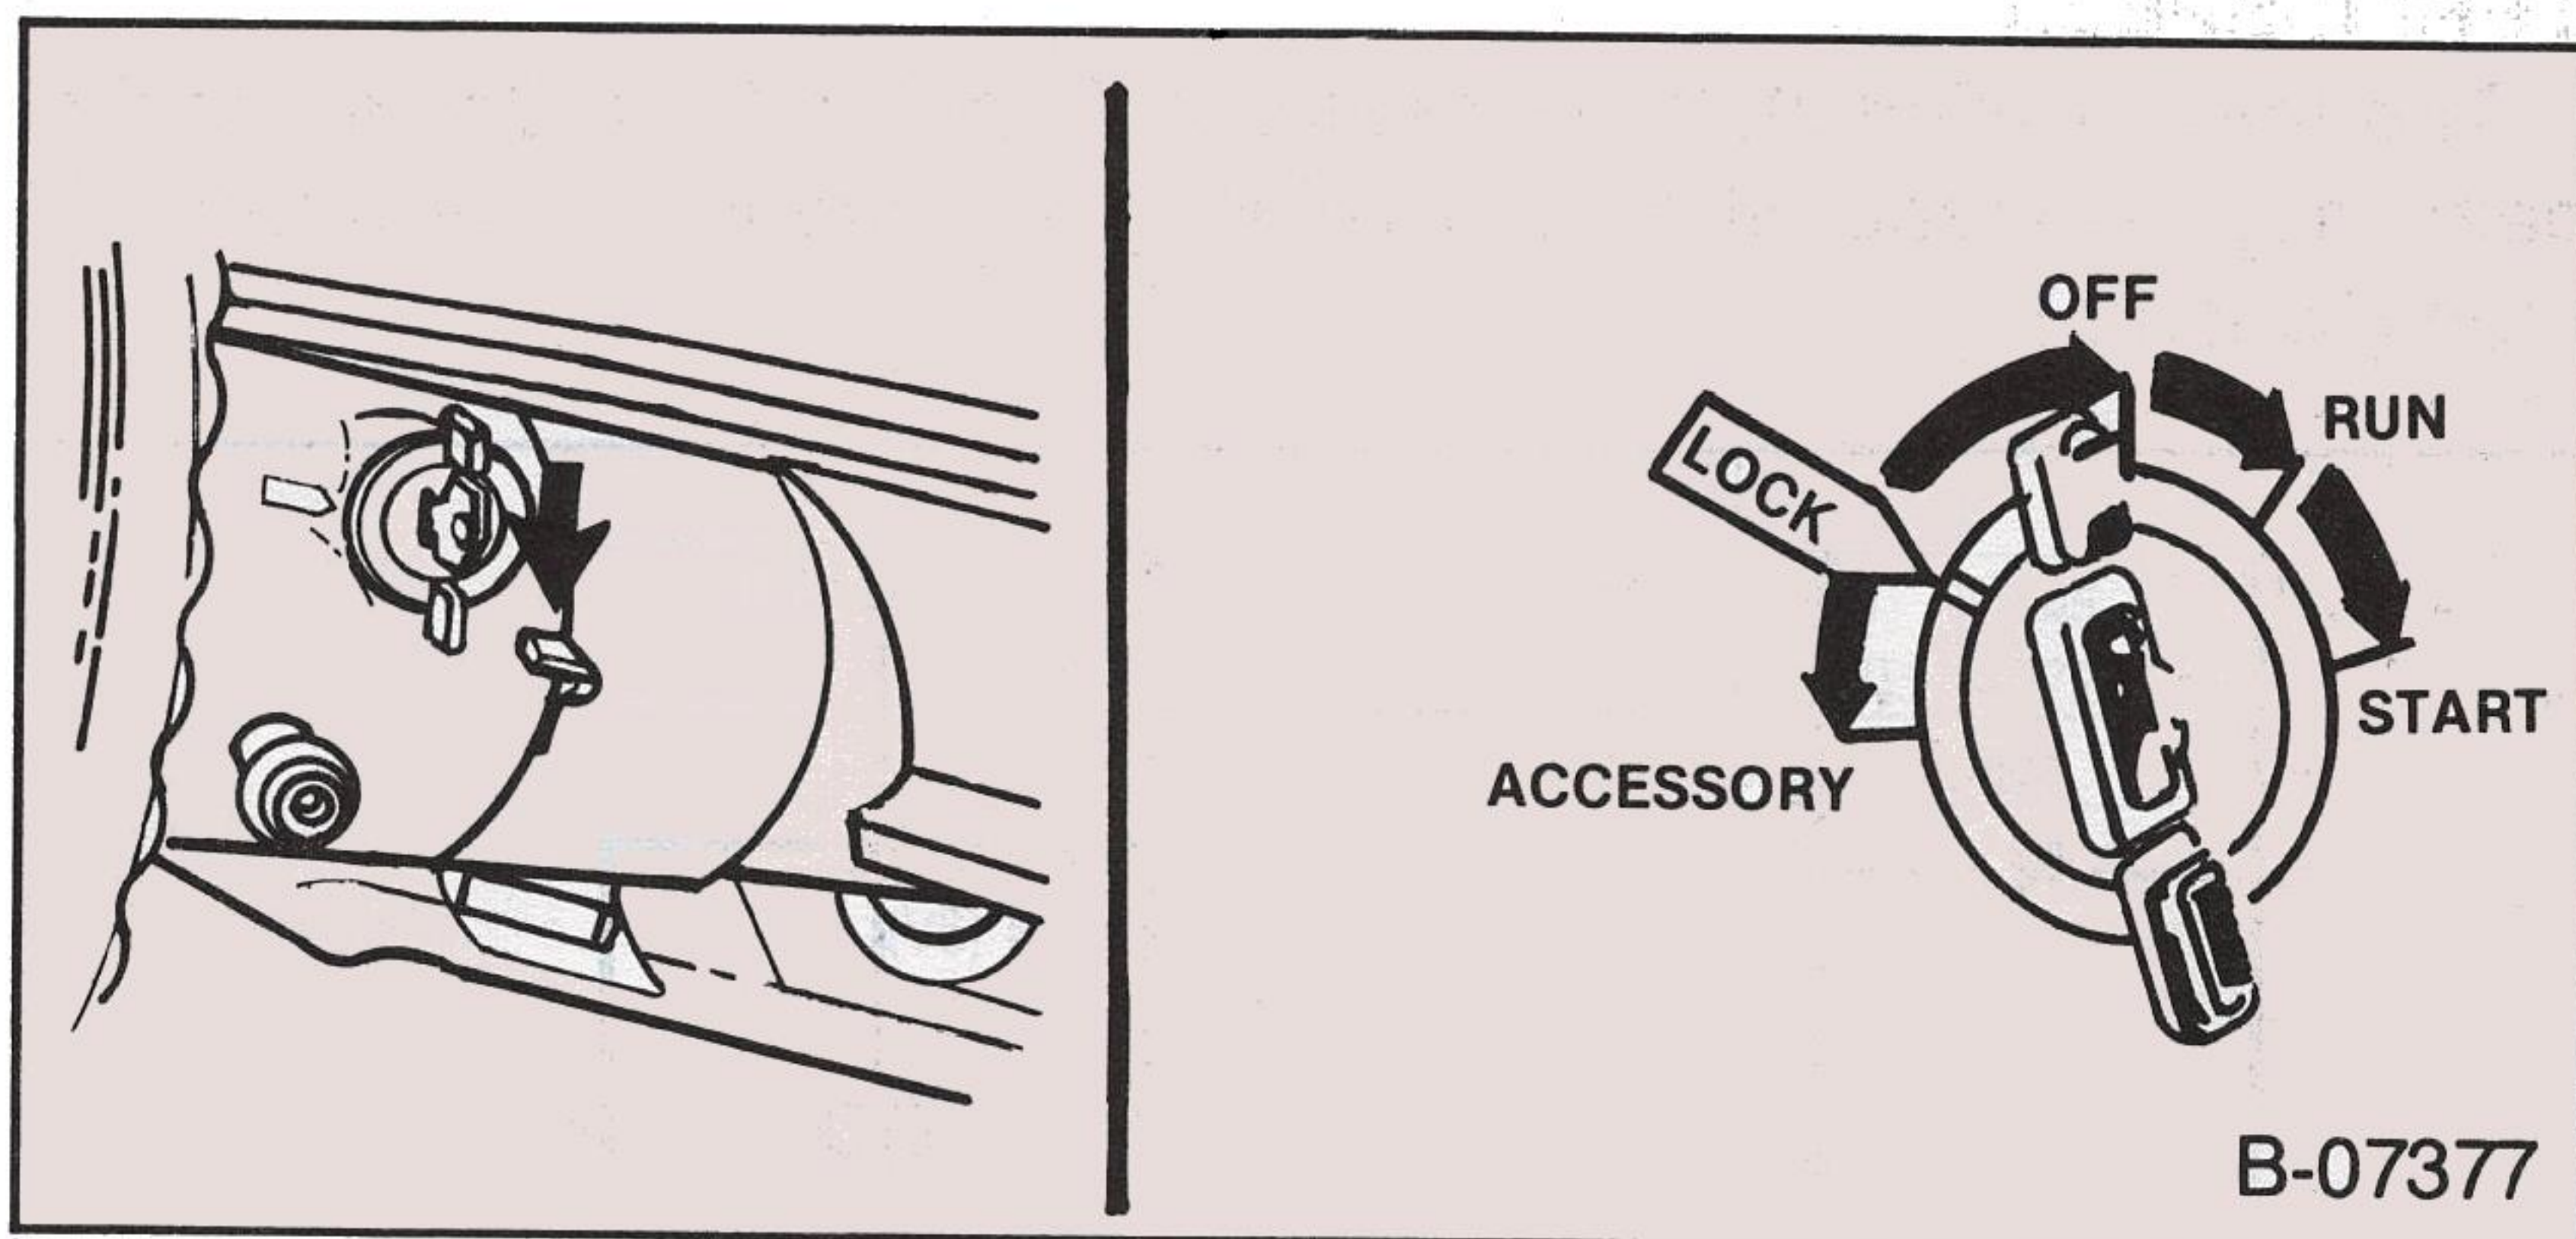

- **Accessory** — You can use some electrical accessories when the engine is not running. To engage this position, push in the square-head key and turn the top of the key toward you.
- **Lock** — Normal parking position. It locks the ignition and prevents normal use of the steering wheel and shift controls. The ignition key cannot be turned to “Lock” and removed until the shift lever is moved to “P” (Park) on automatic transmission models (shift to “Reverse” on 3-speed manual transmission models). If you have a 4-speed manual transmission, “Lock” prevents normal use of the steering wheel. The ignition key cannot be turned to “Lock” without pressing down the key release lever.
- **Off** — You can turn off the engine without locking the steering wheel and shift controls.
- **Run** — Normal operating position. (On diesel engine vehicles, “Run” turns on the glow plugs. See also “Starting the Diesel Engine” in Section 2.)
- **Start** — Cranks the engine.


If you have trouble turning the key to unlock the ignition, first be sure the key is pushed in all the way. Then, try to turn the steering wheel as hard as you can in the direction the wheels are turned. At the same time, turn the ignition key with as much effort as you can apply with your hand. Do not try to use a tool of any kind or apply more force on the lock knob, as this could break the knob.

POWER STEERING

If the power steering assist system goes out because the engine has stopped or the assist system has failed, the vehicle can still be

steered. However, much greater effort is needed, especially in sharp turns or at low speeds.

TILT STEERING WHEEL

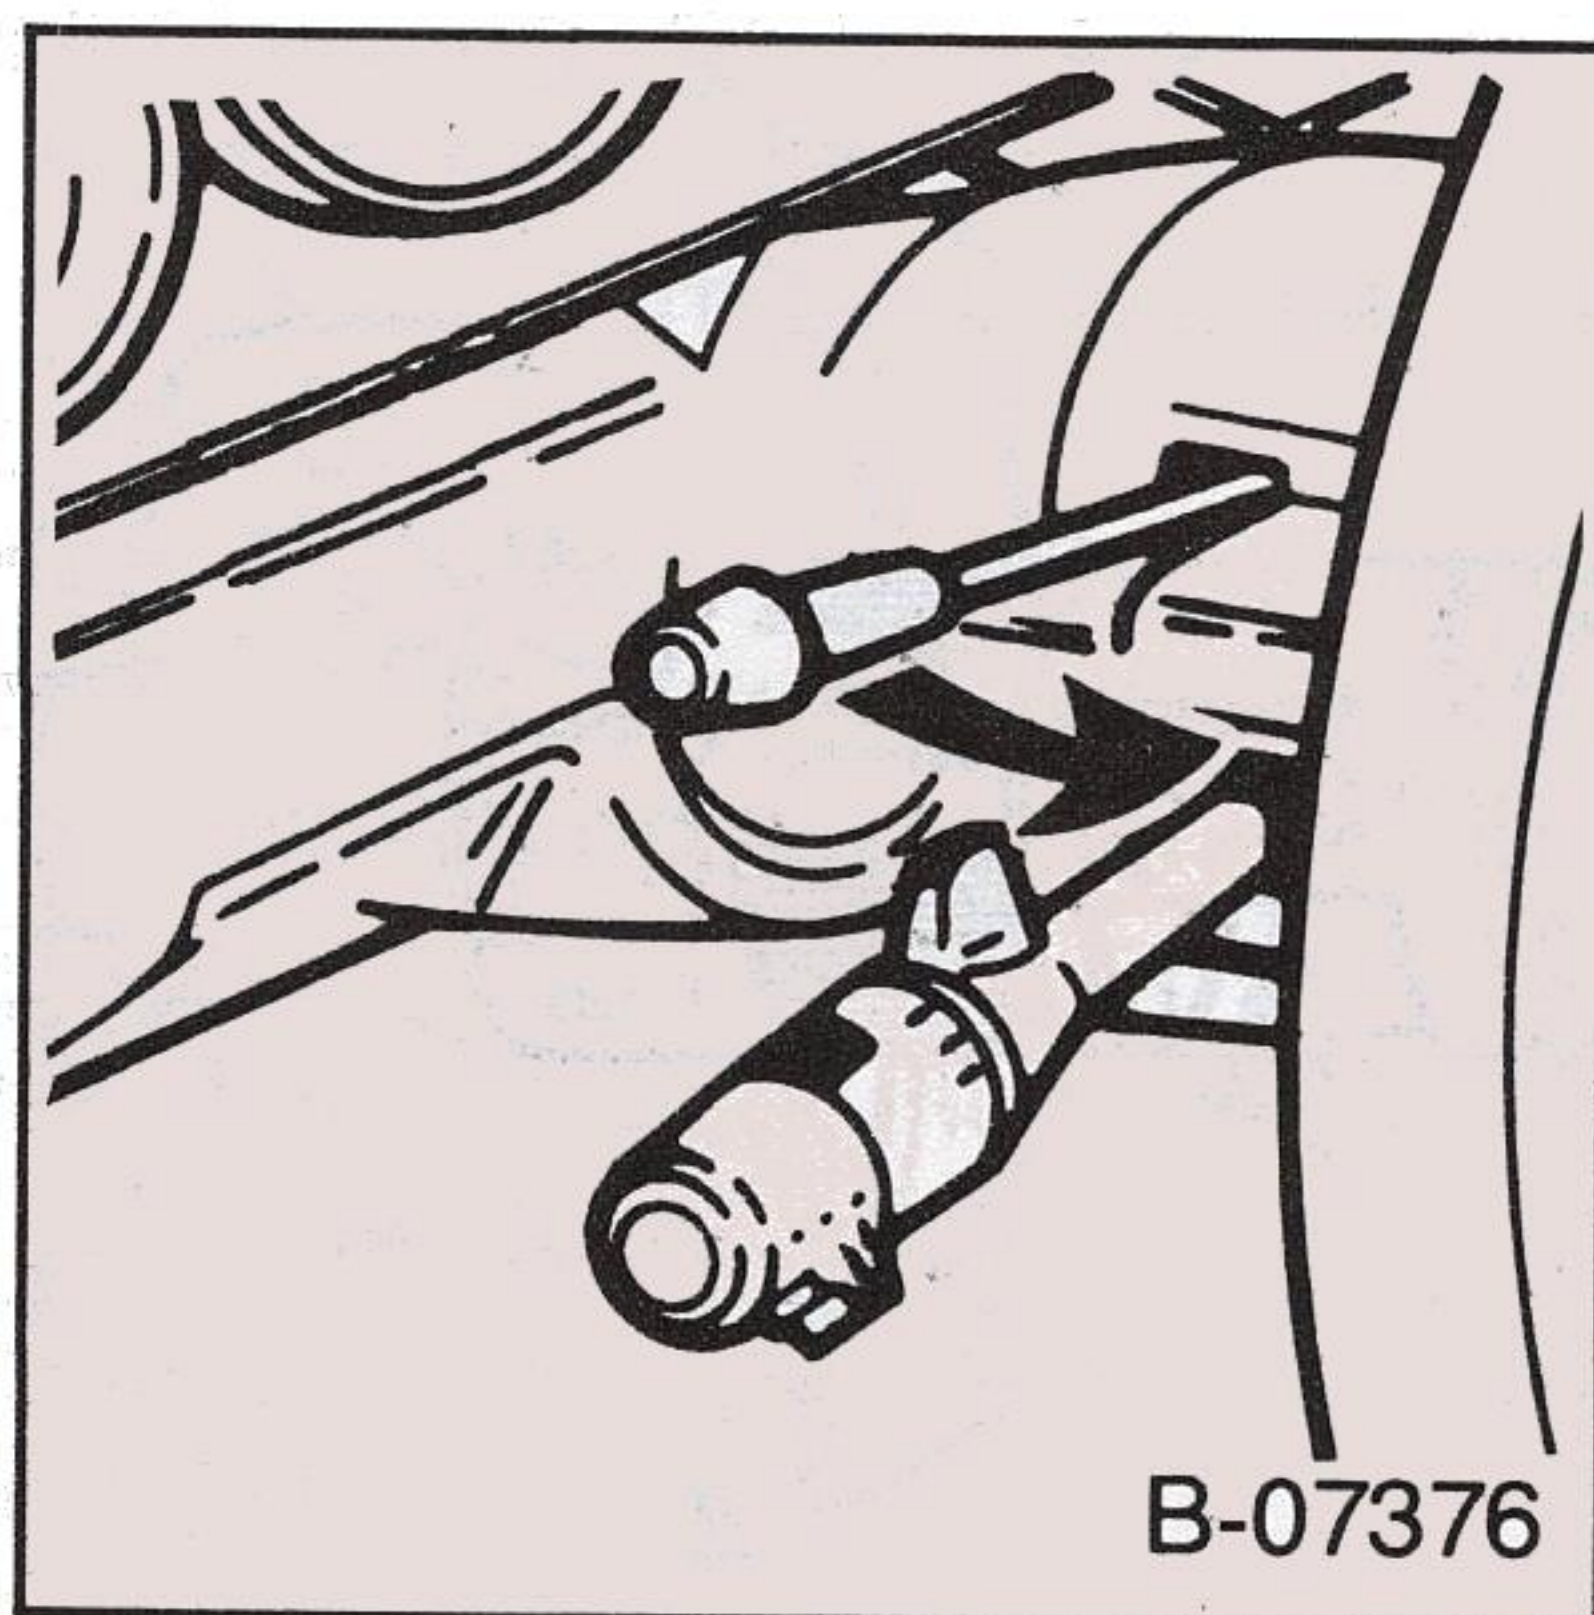

The optional tilt steering wheel can be tilted up above normal position to provide additional room for entrance and exit as well as selected driving positions below normal height. The tilt control lever is located on the left side of the steering column just behind the turn signal lever. To operate pull the lever towards you and move the steering wheel to your desired position then release the lever. This permits individual selection of the most comfortable positions for all driving conditions. On longer trips the steering wheel position may be changed to help minimize tension and fatigue.

HAZARD WARNING FLASHER


Refer to Section 3.

TURN SIGNAL AND MULTI-FUNCTION LEVER

The turn signal lever on the left side of the steering column also controls headlight low-beam and high-beam, the windshield wiper/washer, and the optional Cruise Control. (See Cruise Control operation in this section).

- **Turn Signal** — Move the lever up to the second stop to signal a right turn. Move it down to the second stop to signal a left turn. When the turn is completed, the signal will cancel and the lever will return to horizontal.
- **Lane Change Signal** — In some turns, such as changing lanes, the steering wheel is not turned far enough to cancel the

turn signal. For convenience, you can flash the turn signal by moving the lever part way (to the first stop) and holding it there. The lever will return to horizontal when you release it.

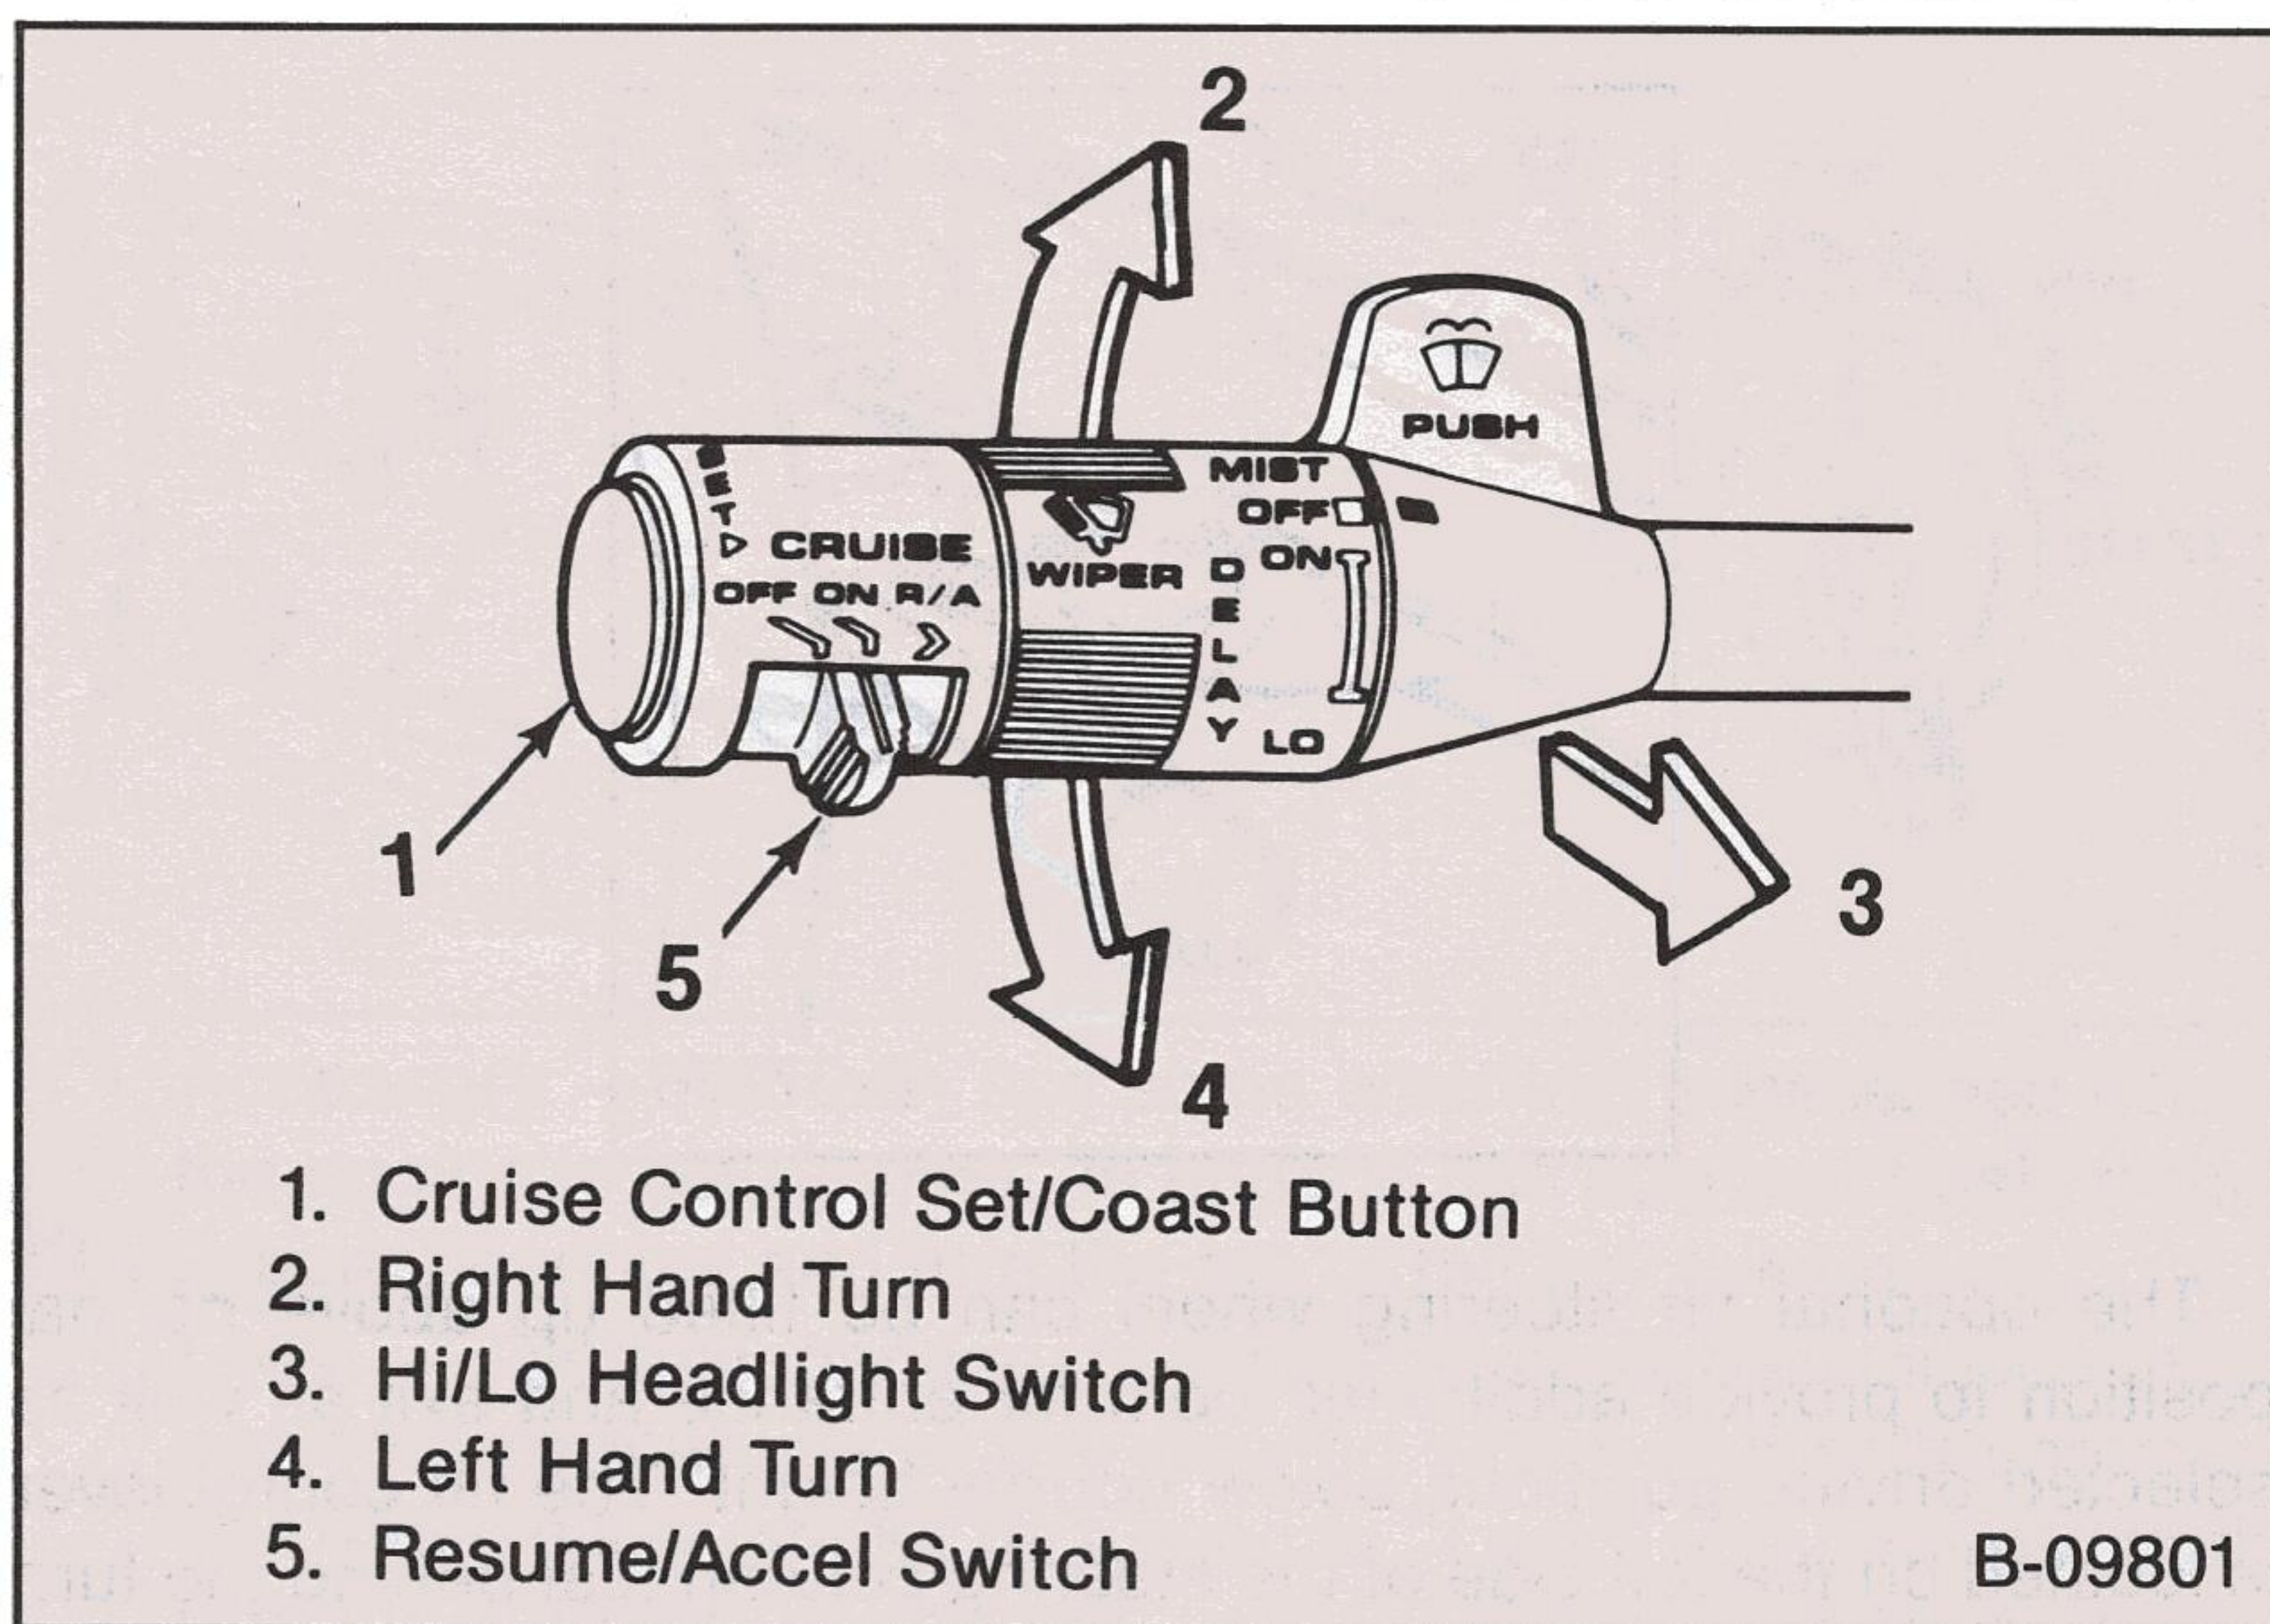

A green light on the instrument panel is designed to flash to tell you that the front and rear signal lights are working. If the light stays on, but does not flash, check for burned-out signal bulb. If the green light does not come on when you move the lever, check the fuse and indicator bulb.

However, if you ordered a trailer towing option in which extra wiring was added to attach the trailer lighting, a different type of flasher was installed. In this case, the green light will continue to flash even if a turn signal bulb burns out. Therefore, you must regularly look at the front and rear turn signal lights to be sure they are working.

- **Headlight Beam Changer** — With the headlights on, pull the lever toward you until you hear a click, then release it. The lights will change from low-beam to high-beam or from high-beam to low-beam. When the high-beams are on, a light will appear on the instrument panel.
- **Standard Windshield Wiper** — The standard windshield wiper system controls are on the band marked “WIPER” on the turn signal lever.

- For a single wiping cycle, turn the band toward you. Hold it there until the wipers begin wiping; then release it. The wipers will stop after one cycle. For several cycles, hold the band in place as long as needed.
- For steady wiping at low speed, turn the band away from you to the first stop. For high-speed wiping, turn the band to the next stop. Turn the band back to "OFF" to turn off the wipers.
- **Delay Windshield Wiper** — The optional delay windshield wiper system lets you vary the wiper speed from a 16-second delay between sweeps up to the normal low and high speeds of the standard wiper.
 - The Delay wipers work the same as the standard wipers, except for the delay feature. To use the wipers with a delay between sweeps, turn the band on the turn signal lever to "ON."
 - Turn the "Delay" band away from you to control the amount of delay. The wipers will move more often the closer the band is to "LO." Turn it fully to the first stop for steady wiping at low speed.
- **Windshield Wiper** — To spray washer fluid on the windshield, push the "paddle" on top of the turn signal lever. (This will also turn on the low-speed wipers.) The spray will continue as long as you hold in the paddle.

After using the windshield washer on the standard wiper system, turn the band back to "OFF" to turn off wipers.

With the Delay wiper system, the wipers will stop (or return to the action for which they were set) after completing the wash cycle.

Operating Tips

- Clear ice or packed snow from the wiper blades before using the wipers. Carefully loosen or thaw wipers that are frozen to the windshield.
- Check the washer fluid level regularly. Do it often when the weather is bad.
- Use a fluid such as GM Optikleen to help prevent freezing damage, and for better cleaning. Be sure to put the fluid in the proper reservoir.
- Fill the washer fluid reservoir only 3/4 full during the winter to allow for expansion if the temperature should fall low enough to freeze the solution.
- Do not use radiator antifreeze in the windshield washer; it could cause paint damage.

- In cold weather, warm the windshield with defroster before using the washer, to help prevent icing that may block the driver's vision.

CRUISE CONTROL WITH RESUME/ACCEL FEATURE

Cruise Control is an optional speed control system. The system allows the vehicle to keep a constant forward speed during most normal driving without keeping your foot on the accelerator pedal, thus increasing driver comfort on long trips. The system can hold a speed of above 25 mph (40 km/h), or higher within the limits of your engine.

The system is also designed to resume a pre-set cruising speed after:

- Braking, clutching with manual transmission vehicles, without using the accelerator pedal.
- Accelerating from a given set speed to a higher control speed
- and also allows the driver to "Tap-up" and increase speed or "Tap-down" to decrease vehicle speed in increments of about 1 mph (1.6 km/h) when needed. This feature is useful when traffic conditions warrant a small adjustment in speed.

The controls are part of the turn signal lever. The "Cruise" switch must be moved to "On" before the system will work. The "Set/Coast" button is in the end of the turn signal lever.

To Engage Cruise Control

Accelerate to the desired speed, push in the "Set/Coast" button all the way and release it (or use the "Resume/Accel" (R/A) switch during first engagement only). Take your foot off the accelerator pedal and the set speed will be maintained up or down hill. The Cruise Control is designed to disengage when you apply the brakes and also with the clutch on manual transmission vehicles. It will also disengage by moving the "Resume/Accel" (R/A) switch to off or by turning the ignition off. (To disengage the system without coming to a complete stop, push the brake pedal or clutch lightly; use just enough force to disengage the system, without stopping the vehicle.)

To Change Cruising Speed

To reset the Cruise Control to a faster speed, accelerate to the speed you wish. Push in the "Set/Coast" button all the way, (for less than a second) then release it.

Or, use the "Resume/Accel" switch to accelerate and reset to the speed you wish. The "Resume/Accel" (R/A) switch must be held (over a second) in order to engage the "Accel" mode. Speed may

also be increased by tapping the “Resume/Accel” switch for less than a second while cruising. The set speed will be increased by about 1 mph (1.6 km/h) for every tap. “Tap-ups” are limited to 10 mph (16 km/h) above vehicle speed.

To reset to a slower speed, push in the “Set/Coast” button all the way and hold it there. Wait until the vehicle slows to the desired speed, then release the button. Speed may also be decreased by tapping the “Set/Coast” button for less than a second while cruising and the memory speed will be decreased about 1 mph (1.6 km/h) for every tap, “Tap-downs” are limited to a minimum cruising speed of 25 mph (40 km/h).

To “Resume/Accel”

After braking or stopping the vehicle without turning off the ignition, you can “resume” to your last set cruising speed by accelerating to 25 mph (40 km/h) or more and sliding the cruise switch momentarily to “Resume/Accel;” when you release the “Resume/Accel” switch, your vehicle will accelerate to the cruising speed set before braking or stopping.

Sliding cruise switch to “Resume/Accel” position and **holding the switch** in longer than 1 second will accelerate the vehicle until the switch is released. The speed at which the switch is released will become the new cruising speed.

To Disengage

Disengage the Cruise Control by pushing the brake pedal or the clutch pedal on manual transmission vehicles. You can also turn off the system by moving the “Cruise” switch to “Off.” Holding in the engagement button until vehicle speed fall below 25 mph (40 km/h), will also disengage the system.

To Pass A Vehicle

Use the accelerator pedal for more speed when passing. When you take your foot off the pedal, the vehicle will slow down to the speed set before passing.

NOTICE: To help keep the vehicle under control, do not use the Cruise Control and particularly its RESUME/accel feature under the following conditions:

- When the previously set speed is faster than the existing traffic flow.
- When it is not possible to keep the vehicle at a set speed.
- On slippery roads, such as those covered with snow and ice.
- On winding roads, in heavy or varying traffic volume, or in traffic that varies in speed.

After accelerating to the desired speed and engaging the Cruise Control the vehicle will hold a set speed and will NOT slow down when you take your foot off the accelerator pedal. To slow the vehicle, follow the instructions above under "To Disengage."

When going up or down hills, it is possible for the vehicle to lose or to gain speed (particularly when towing a trailer), even though the Cruise Control is engaged. If this happens when going uphill, merely depress the accelerator pedal to maintain the speed desired. If going down a hill steep enough to cause the vehicle to gain speed, depress the brake pedal — which will both disengage the Cruise Control and help slow the vehicle. In addition, when going down a steep or long grade, the transmission should be shifted into a lower gear to help control vehicle speed — see "Descending A Grade" in Section 2.

HORN

The horn on your vehicle is actuated by firmly pressing on the pad in the center of the steering wheel.

FLOOR CONTROLS

BRAKING SYSTEM

The regular braking system is designed for braking performance under a wide range of driving conditions even when the vehicle is loaded to its full rated vehicle load capacity.

BRAKE WARNING LIGHT

The brake system warning light is covered under “Instrument Panel” in this section.

RIDING THE BRAKE

NOTICE: “Riding the brake” by resting your foot on the pedal when you do not intend to brake can overheat the brakes and wear out the brake linings and pads faster. This may also damage the brakes and will waste fuel.

WET BRAKES

CAUTION: Driving through water deep enough to wet brake components may cause the brakes not to work as well. As a result, the vehicle will not slow down at the usual rate, and it may pull to the right or left. After checking to the rear for other vehicles, apply the brakes lightly to check whether this has happened. To dry them quickly, lightly apply the brakes. At the same time keep a safe forward speed, with plenty of clear space ahead, to the rear, and to the sides. Do this until the brakes return to normal. Always do this after driving through water to help reduce the risk of personal injury.

VACUUM POWER BRAKES

If the engine stops, do not pump the brakes. The system is designed to stop the vehicle with reserve power assist if the brake pedal is held down. This reserve is greatly reduced each time you apply and release the brakes. If, when you turn the steering wheel during braking, the vehicle does not turn, don't push as hard on the brake pedal.

Without power assist the vehicle can still be stopped by pushing much harder on the brake pedal, however, the stopping distance may be longer.

HYDRAULIC POWER BRAKES (DIESEL ENGINES)

If you lose power steering assist (such as when the engine stops), do not pump the brakes. The system is designed to stop the vehicle with reserve power assist if the brake pedal is held down. This reserve is used up after one brake application.

Without power assist the vehicle can still be stopped by pushing much harder on the brake pedal, however, the stopping distance may be longer. If, when you turn the steering wheel during braking, the vehicle does not turn, don't push as hard on the brake pedal.

BRAKES (EXCEPT PARKING BRAKE)

If the brake pedal goes down farther than normal, it may be due to a lack of adjustment of any rear drum brakes. To find out if this is the case, drive backward and forward a few times, applying the brakes firmly when going in each direction. Also see "Brake Pedal Travel" in this section.

See your dealer if pedal height does not return to normal, or there is a rapid increase in pedal travel whether or not your vehicle has rear drum brakes. This could be a sign of brake trouble.

TORQUE LOCK

The parking brake should be set first whenever leaving the driver's seat. If the vehicle is parked on a grade and the transmission selector lever is placed in "P" (Park) before the parking brake is set, the weight of the vehicle may exert so much force on the parking pawl in the transmission that it may be difficult to pull selector lever out of "P" (Park). This condition is called "torque lock." To prevent this, the parking brake should be applied before moving the selector lever to "P" (Park).

When preparing to move the vehicle, the selector lever should be moved out of the "P" (Park) position before releasing the parking brake. It is good driving practice to set the parking brake first, then release the transmission from "P" (Park), even on level surfaces.

If "torque lock" does occur, it may be necessary to have another vehicle nudge this vehicle uphill to take some of the pressure off the transmission while the driver pulls on the transmission selector lever.

BRAKE PEDAL TRAVEL

If your vehicle has a diesel engine, you have a Hydro-Boost Brake System, brake pedal travel is slightly different from brake pedal travel on other vehicles. The vehicle may be brought to a full stop by applying normal force to the brake pedal. Although there is no need to push the pedal beyond the point where it stops or holds the vehicle, by applying more force the pedal will travel some additional

distance. A slight hissing sound may be heard when this happens. This extra brake pedal travel and hissing sound are normal.

DISC BRAKE WEAR INDICATORS

Front disc brake pads have built-in wear indicators which should make a high-pitched squealing or cricket-like warning sound when the brake pads are worn to where new pads are needed. The sound will come and go, or be heard all the time when the vehicle is moving but will stop when the brake pedal is pushed down firmly. Expensive rotor damage can result if pads are not replaced when needed.

See also the brake checks listed in the Maintenance Schedule booklet.

HEIGHT-SENSING BRAKE PROPORTIONING VALVE

The height sensing brake proportioning valve, used on 30/35 series models, provides optimum brake balance and efficiency. Vehicle braking force is distributed to the front and rear wheels as defined by light or heavy payload conditions.

Mounted on the frame, the valve responds to changes in vehicle trim height as related to rear axle load. Mechanical linkage connects the valve to a bracket that is attached to the rear axle.

Adding any suspension accessories or other equipment (such as load leveling kits, air shocks, suspension lift kits, additional spring leafs, etc.), or making any modification that will change the distance between the axle and the frame without changing the load will provide a false reading to the brake proportioning valve. This could result in less than optimum brake performance under some circumstances.

PARKING BRAKE

The parking brake foot pedal is located at the driver's far left side.

- To set the parking brake, hold the regular brake pedal down while setting the parking brake with your other foot. Before you leave the driver's seat, follow the steps under "Parking" in Section 2.
- To release the parking brake, hold the regular brake pedal down while pulling the "Brake Release" handle (at the lower left side of the instrument panel). The brake system warning light is designed to remind you if the parking brake control is not fully released when the ignition is on. Never drive the vehicle with the parking brake set as this will reduce rear brake effectiveness due to overheating, shorten brake life, and may cause permanent damage. If the parking brake does not hold the vehicle securely, or does not fully release, see your dealer.

CLUTCH PEDAL

On models equipped with a manual transmission, a clutch pedal is used to engage or disengage the clutch, thereby connecting or disconnecting the engine from the transmission and driveline to rear wheels. When the pedal is fully extended the clutch is engaged, driving the transmission and the rear wheels.

INSTRUMENT PANEL AND CONTROLS

11 STANDARD INSTRUMENTATION

GASOLINE

11 OPTIONAL INSTRUMENTATION

GASOLINE

8 STANDARD INSTRUMENTATION

DIESEL

11 OPTIONAL INSTRUMENTATION

DIESEL

1. Speedometer

2. Odometer

3. Fuel Gage

4. "OIL/CHOKE" Warning Light (Gasoline)

5. "OIL" Pressure Warning Light (Diesel)

6. Engine Coolant "TEMP" Warning Light

7. Charging System "VOLTS" Warning Light

8. "FASTEN BELTS" Light

9. "CHOKE" Warning Light

10. "LOW COOLANT" Warning Light (Diesel)

11. Brake System Warning Light

12. Engine Coolant Temperature Gage

13. Voltmeter

14. Oil Pressure Gage

B-09648

2-51

INSTRUMENTS

The instruments, gages and indicator lights conveniently grouped in the instrument cluster are designed to tell you at a glance many important things about the performance of your vehicle. The following information will enable you to more quickly understand and properly interpret these instruments.

SPEEDOMETER

The speedometer hand indicates vehicle speed in miles per hour and kilometers per hour.

ODOMETER

The group of figures in the speedometer lower center section indicates the accumulated mileage in miles or kilometers.

TAMPER-RESISTANT ODOMETER

Federal law prohibits tampering with vehicle odometers to alter accumulated mileage. For your protection the odometer of this vehicle is designed with tamper-resistant features to indicate tampering. If silver lines appear vertically between odometer numerals, it is likely that the odometer has been turned back or reversed. The mileage shown may not be actual.

Whenever a new odometer is installed and cannot be set to the same mileage registered on the prior odometer, the law requires the owner to install a label on the driver's door frame to show the previous odometer reading and the date of replacement. The replacement odometer must then be set to zero. To determine the actual vehicle mileage, add the mileage shown on the label to the current odometer reading. If the replacement odometer can be set to the same mileage as the prior odometer, no door frame label is needed.

FUEL GAGE

The fuel gage will register the APPROXIMATE fuel level in the tank, when the ignition is in the RUN position.

When the gage registers EMPTY, some fuel is still available as a reserve. When the gage registers FULL, some fuel can still be added to the tank.

The following conditions may be considered normal:

- Fuel station pump may shut off before fuel gage indicates FULL.

- Amount of fuel required for fill-up may not exactly correspond to gage reading.
- Needle may not move away from FULL until some time after fill-up.
- Needle may move during turns, stops and accelerations.

When the ignition switch is turned to the OFF position, the needle will not necessarily return all the way to the EMPTY mark.

INDICATOR AND WARNING LIGHTS

OIL/CHOKE INDICATOR LIGHT (GASOLINE ENGINE)

This light will come on to provide a “bulb check,” when the ignition is turned on, but should go out after the engine is started. If light fails to come on with the ignition turned on, it could indicate a burned-out bulb, or a blown instrument lamp fuse or a defective electric choke heater circuit. Have system repaired if light does not come on during check.

Occasionally, this light may flicker momentarily while the engine is running. Should this occur, check engine oil level as outlined in Section 5 “Checking Oil Level.” If the light comes on continuously, pull over to a safe place and stop the engine until the source of trouble can be located and corrected. The source of the trouble could be any of the following:

- Loss of engine oil pressure (check engine oil level).
- Blown instrument lamp fuse.
- Blown choke heater fuse.

NOTICE: Continuing to run the engine with an illuminated oil/choke light can cause serious engine damage.

OIL PRESSURE WARNING LIGHT (DIESEL ONLY)

When the ignition is turned to “Run,” the “Oil” warning light appears until the engine is started. Thereafter, the light should be off unless there is insufficient oil pressure or engine idle speed is below normal. If the light should come on at any time while driving (other than momentarily at idle speed or after a sudden stop), stop immediately and investigate the cause of low oil pressure. This could possibly be caused by low oil level in the crankcase.

NOTICE: Continuing to run the engine with an illuminated oil pressure light can cause serious engine damage.

ENGINE COOLANT TEMPERATURE WARNING LIGHT

This light is located in the instrument cluster and is designed to come on to warn the driver that the engine coolant has overheated and immediate action is required to correct the condition. As a check that the bulb and its circuit are working, the light will come on during engine starting. If the light does not come on during this check, have it repaired promptly. If the light comes on at any other time, refer to "Engine Cooling System Overheating" in Section 3.

CAUTION: If the Engine Coolant Temperature Light or Gage shows an overheat condition or you have other reason to suspect the engine may be overheating, continued operation of the engine (other than explained in Section 3) **EVEN FOR A SHORT TIME** may result in a fire and the risk of personal injury and/or severe vehicle damage. Take immediate action as outlined under "Engine Cooling System Overheating" in Section 3.

CHARGING SYSTEM WARNING LIGHT

This light is designed to come on when the ignition key is in the "RUN" position, but before the engine is started. After the engine starts, the light should go out and remain out. If the light remains on when engine is running, have your authorized dealer locate and correct the trouble as soon as possible.

"CHECK ENGINE" or "SERVICE ENGINE SOON" Light

California light duty emission class gas engines have a "CHECK ENGINE" light, and all Federal heavy duty emission class gas engine vehicles over 8600 GVW have a "SERVICE ENGINE SOON" light. The "CHECK ENGINE" (or "SERVICE ENGINE SOON") light on the instrument panel should come on to indicate the need for emission system service. It should come on during engine starting to let you know the bulb is working. (The light will stay on a short time after the engine starts.) Have the system repaired if the "CHECK

ENGINE" (or **"SERVICE ENGINE SOON"**) light does not come on during engine starting.

If the light comes on, either intermittently or continuously while driving, service to the emission system is required. Although in most cases the vehicle is driveable, and does not require towing, see your GM dealer as soon as possible for service of the system.

Continued driving without having the system serviced could cause damage to the emission control system. It could also affect fuel economy and driveability.

See also Section 5 Computer Command Control or A.I.R. System (Vehicle over 8600 GVW).

"CHOKE" LIGHT (GASOLINE ENGINE)

This light is on vehicles equipped with the optional "gage" instrument cluster. The light is designed to come on when the ignition is turned on, to provide a "bulb check," but should go out after the engine is started. If the light fails to come on with the ignition turned on, it could indicate a burned out bulb, a defective electric choke heater circuit or a blown instrument lamp fuse.

Have the system repaired if light does not come on during check.

If the light comes on during normal operation, the engine should be stopped and the trouble located and corrected.

NOTICE: Continuing to run the engine with an illuminated **"CHOKE"** light can cause unusually high exhaust system temperatures which could result in serious damage to the vehicle.

"LOW COOLANT" WARNING LIGHT

This light is included in the instrument cluster of any truck having a diesel engine. The light is designed to come on during engine starting to serve as a bulb check. Once the engine starts, however, the light should go out.

If the light does not go out, or if it comes on while driving, have the radiator coolant level checked. (Refer to Caution under "Engine Cooling System" in Section 3 of this manual.)

NOTICE: Operation with low coolant can cause engine overheating and possible engine damage.

“WATER IN FUEL” WARNING LIGHT

Vehicles with diesel engines have a “WATER IN FUEL” light to warn of excessive water in the fuel system. For details of how this light works, see “Diesel Fuel Requirements and Fuel System” in Section 2 of this manual.

GLOW PLUGS LIGHT

Your diesel engine has a special starting system. An instrument panel (GLOW PLUGS) light tells you when the engine is ready to be started. For details, see “Starting the Diesel Engine” in this section.

BRAKE SYSTEM WARNING LIGHT

On vehicles with hydraulic brakes, the regular braking system is a split system designed so that one part will provide some braking if there is a loss of hydraulic pressure in the other part of the system. The system has a “BRAKE” warning light located in the instrument panel. For bulb check, the “BRAKE” light should come on briefly during engine starting. To serve as a reminder, the light should stay on when the parking brake is not fully released and the ignition is on. Have the system repaired if the light does not come on when it should. This warning light does not do away with the need for brake inspection and maintenance. The brake fluid level must be checked regularly. Refer to your Maintenance Schedule booklet for other brake checks.

If the light remains on after engine start up or comes on during operation of the vehicle, it may mean that there is something wrong with part of the brake system.

What to do:

1. Check to see that the parking brake has been released. If it has been:
2. Pull off the road and stop carefully. Remember that:
 - Stopping distances may be longer.
 - You may have to push harder on the pedal.
 - The pedal may go down farther than normal.

Have vehicle towed to dealer for repair.

Continued driving without necessary repairs could be dangerous.

GAGES

ENGINE COOLANT TEMPERATURE GAGE

This optional gage is located in the instrument cluster. If the gage shows that an overheat condition exists — as indicated by the pointer moving beyond the normal band, immediate action by the driver is required. If an overheat condition is shown, refer to “Engine Cooling System Overheating” in Section 3. The coolant temperature indication will vary with air temperature and operating conditions. The ignition must be on for accurate readings.

Prolonged driving or idling in very hot weather may cause the pointer to move beyond the normal band. Make a practice of scanning this and other gages while driving, especially in hot weather and/or when the vehicle is under load. Refer to Caution under “Engine Coolant Temperature Light.”

VOLTMETER


When the engine is operating, the voltmeter indicates the charging system voltage. During minimum electrical load, the pointer will read to the right of the center. As the electrical load is increased, or in stop-and-go driving, the pointer will rotate to the left. A meter reading continuously in the left or right zone indicates an electrical system malfunction. Cause of the malfunction should be determined and corrected.

OIL PRESSURE GAGE

The oil pressure gage indicates the pressure at which oil is being delivered to the various parts of the engine requiring lubrication. Pressures registered by the gage of oil being used. Oil pressure of a cold engine being operated at a given speed will be somewhat higher than when the engine is at normal operating temperature at the same speed. Prolonged high speed operation on a hot day at the given speed will result in somewhat lower oil pressure readings. Readings of 205 to 275 kPa (30 to 40 psi) may be considered normal during moderate road speeds of 35 to 40 mph (55 to 60 km/h) with the engine at proper operating temperature. Gage readings which are consistently high or low under these conditions may indicate lubrication system and/or engine malfunction.

MAIN LIGHTS

LIGHT SWITCH

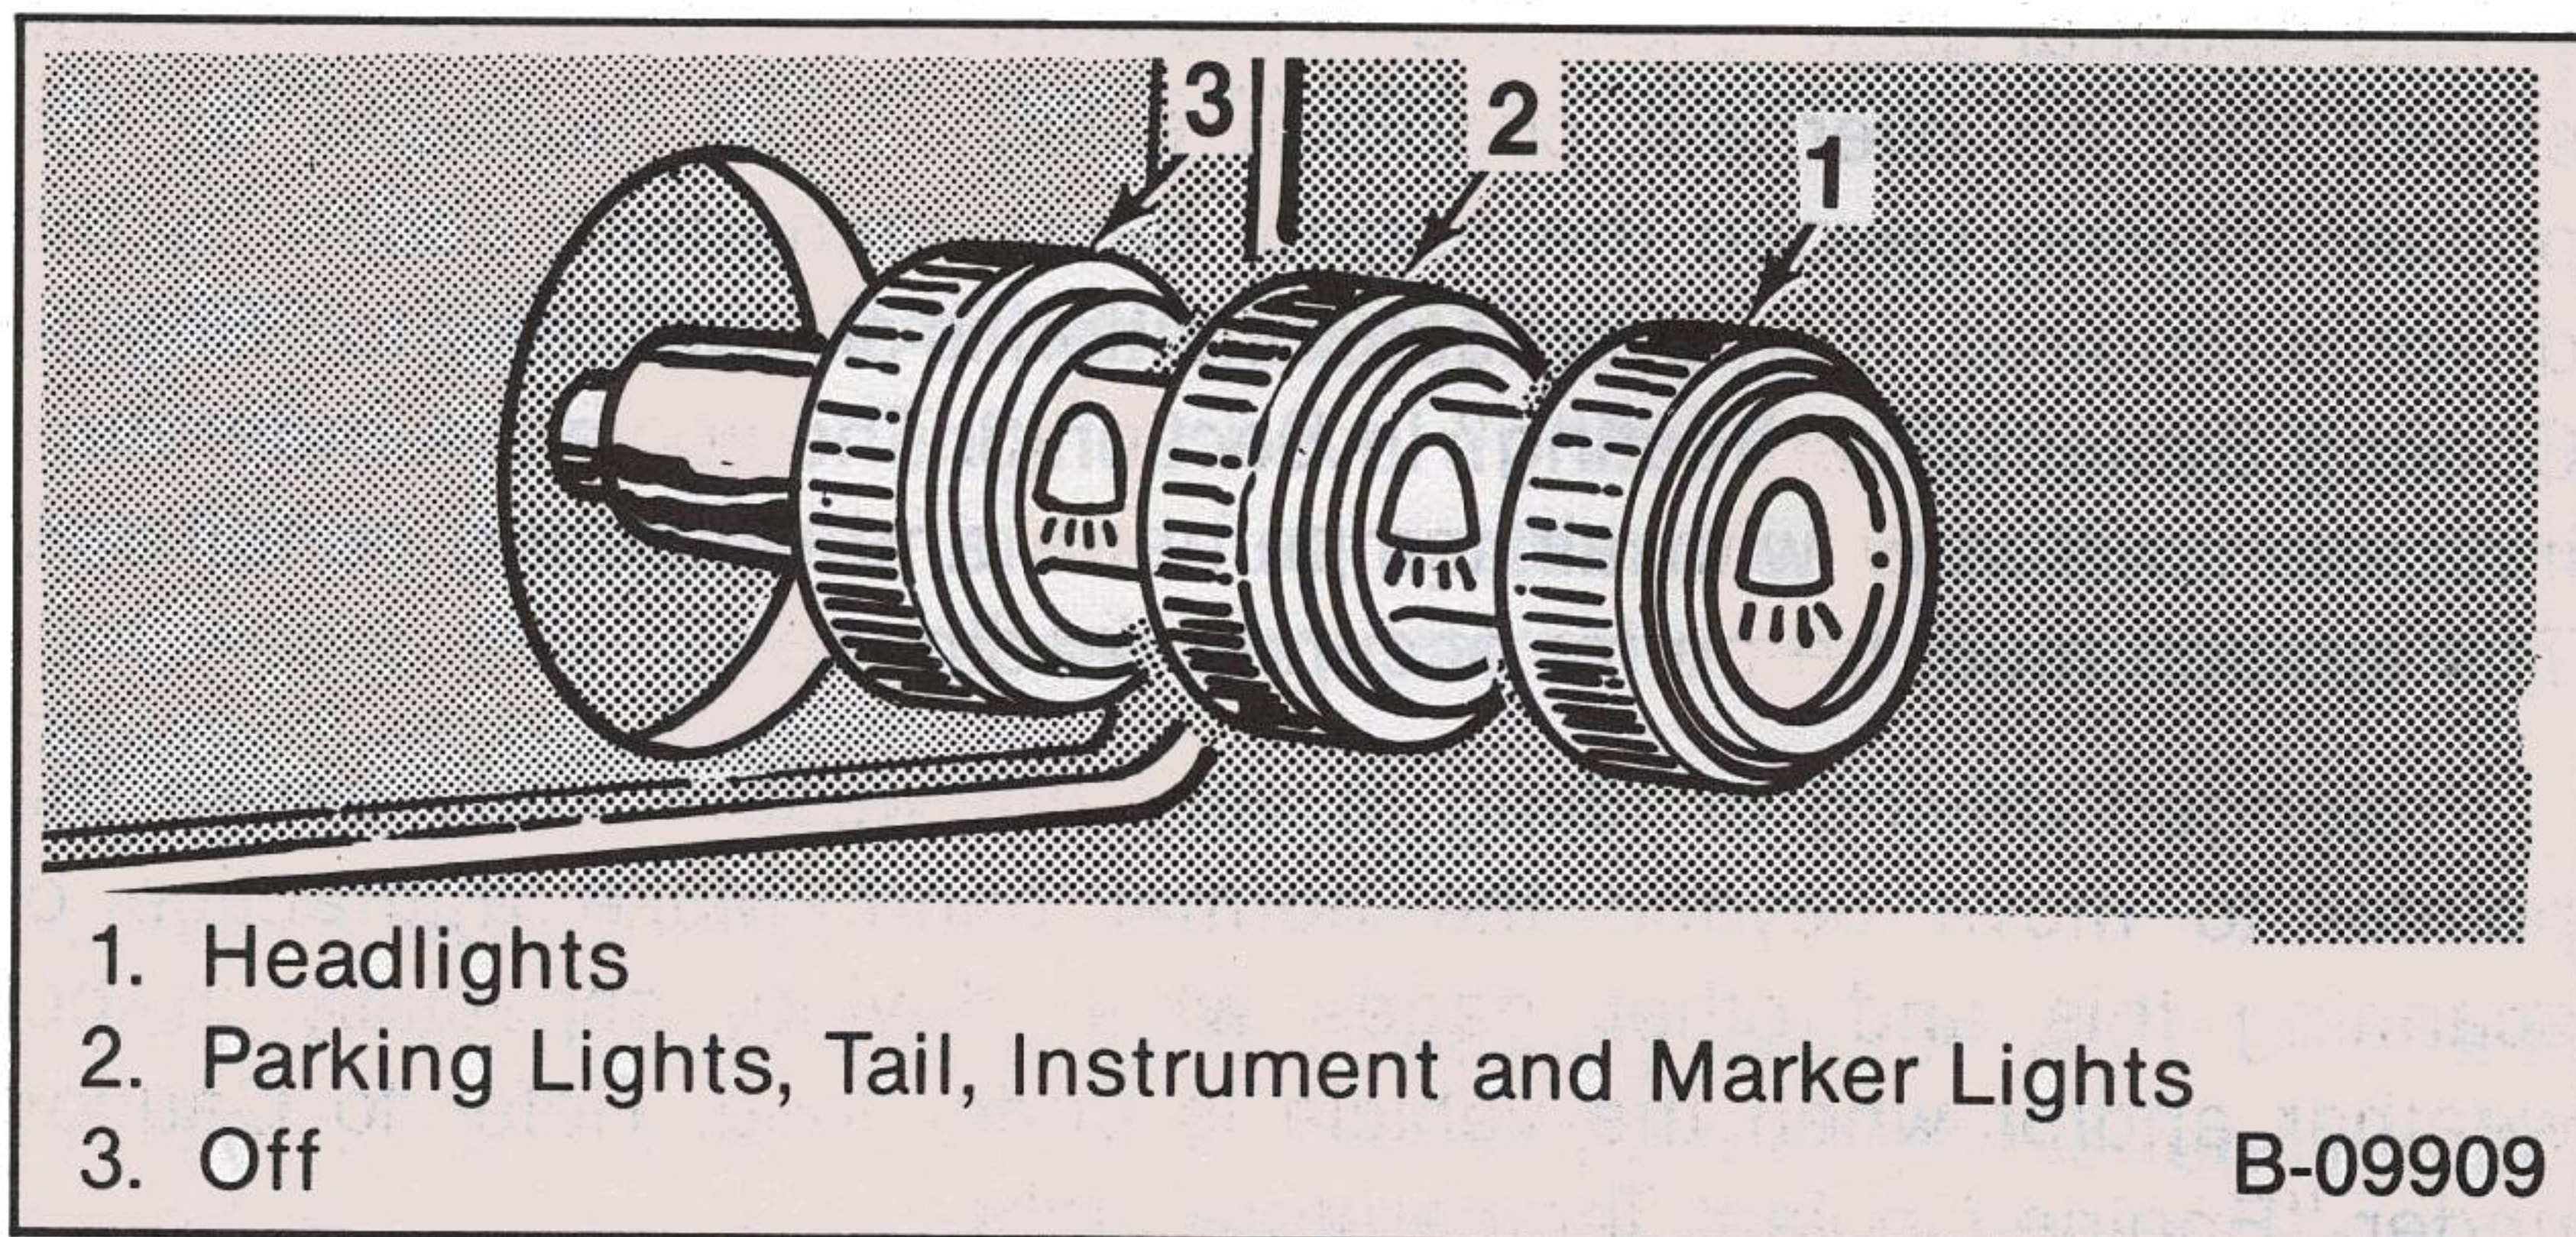

The three-position light switch controls the headlights, taillights, parking lights, sidemarker lights, instrument lights and dome lights as shown.

Instrument light intensity can be varied by turning knob clockwise or counterclockwise. Full counterclockwise position turns on interior light.

The headlight circuit is protected by a circuit breaker in the light switch. An overload on the breaker will cause the lights to “flicker” on and off. If this condition develops, have your headlight wiring checked immediately. The headlight beam changer is located in the Turn Signal Lever; for operation see Section 2 under heading “Turn Signal and Multi-Function Lever.”

Headlight High Beam Indicator Light

The headlights on your vehicle have high and low beams to provide you with proper nighttime visibility for most driving conditions. The “low” beams are used during most city driving. The “high” beams are especially useful when driving on dark roads since they provide long range illumination. The headlight beam indicator light (located on the speedometer face) will be ON whenever the high beams or “brights” are in use. The turn signal lever controls the headlight beams and is described in “Steering Column Controls.”

DOME LIGHT SWITCH

The dome light is controlled by the ON-OFF button located in the right and left front door pillar. When the doors are opened the dome light will come on. The instrument light switch also controls the dome light when doors are closed. Turn this switch fully counterclockwise and the dome light will come on.

Headlight “ON” Warning Buzzer

The optional headlight reminder buzzer provides an audible warning that the main light switch is in one of the “on” positions, either parking lights or headlights.

The reminder buzzer is actuated only when the ignition position and the lights are on.

When the parking lights or headlights are to be operated with the key in the OFF position, the reminder buzzer can be shut off by turning the light switch knob until the instrument cluster lights are not on.

QUARTZ ANALOG CLOCK

The optional quartz analog clock is operated by a crystal controlled electronic circuit for accurate time keeping.

To reset clock, pull out the reset knob then turn the knob until the clock hands reach the desired time.

CIGARETTE LIGHTER (OPTIONAL)

The cigarette lighter is located in the ashtray. To operate, push it in. When it becomes heated, it automatically pops out ready for use. Avoid holding the lighter in by hand while it is heating as damage to the heating element may result.

VENTILATION

AIR VENTS


The control levers for the left and right “ram” air vent doors are located on the kick panels. Vehicles with air conditioning have only a left air vent door. The amount of air discharged at these lower outlets increases with vehicle speed. Maximum airflow can be obtained by opening any of the side door windows. If so equipped, the rear quarter swing-out windows will optimize lower vent performance and provide maximum airflow without opening a side door glass. In this condition, there is minimum air buffeting and road noise.

Operating Tips

- Clear snow and ice from the hood and air inlet in front of the windshield. This helps the heater and defroster work better and reduces the chance of fogging the inside of the windshield.
- When cleaning frost off the inside surface of the windshield, use only a soft cloth or plastic scraper. Do not use metal blades or anything else that will damage this plastic surface which is designed to help protect occupants in a collision. See “Caring for Windshield Inside Surface” under APPEARANCE CARE.
- Run the blower on “HI” for a few moments before driving off. This helps clear the intake ducts of snow and moisture and reduces the chance of fogging the inside of the windows.
- Always keep the front inlet grilles clear of obstructions (leaves, ice, snow, etc.).
- Always keep the underseat air path clear of objects.

HEATING

HEATER

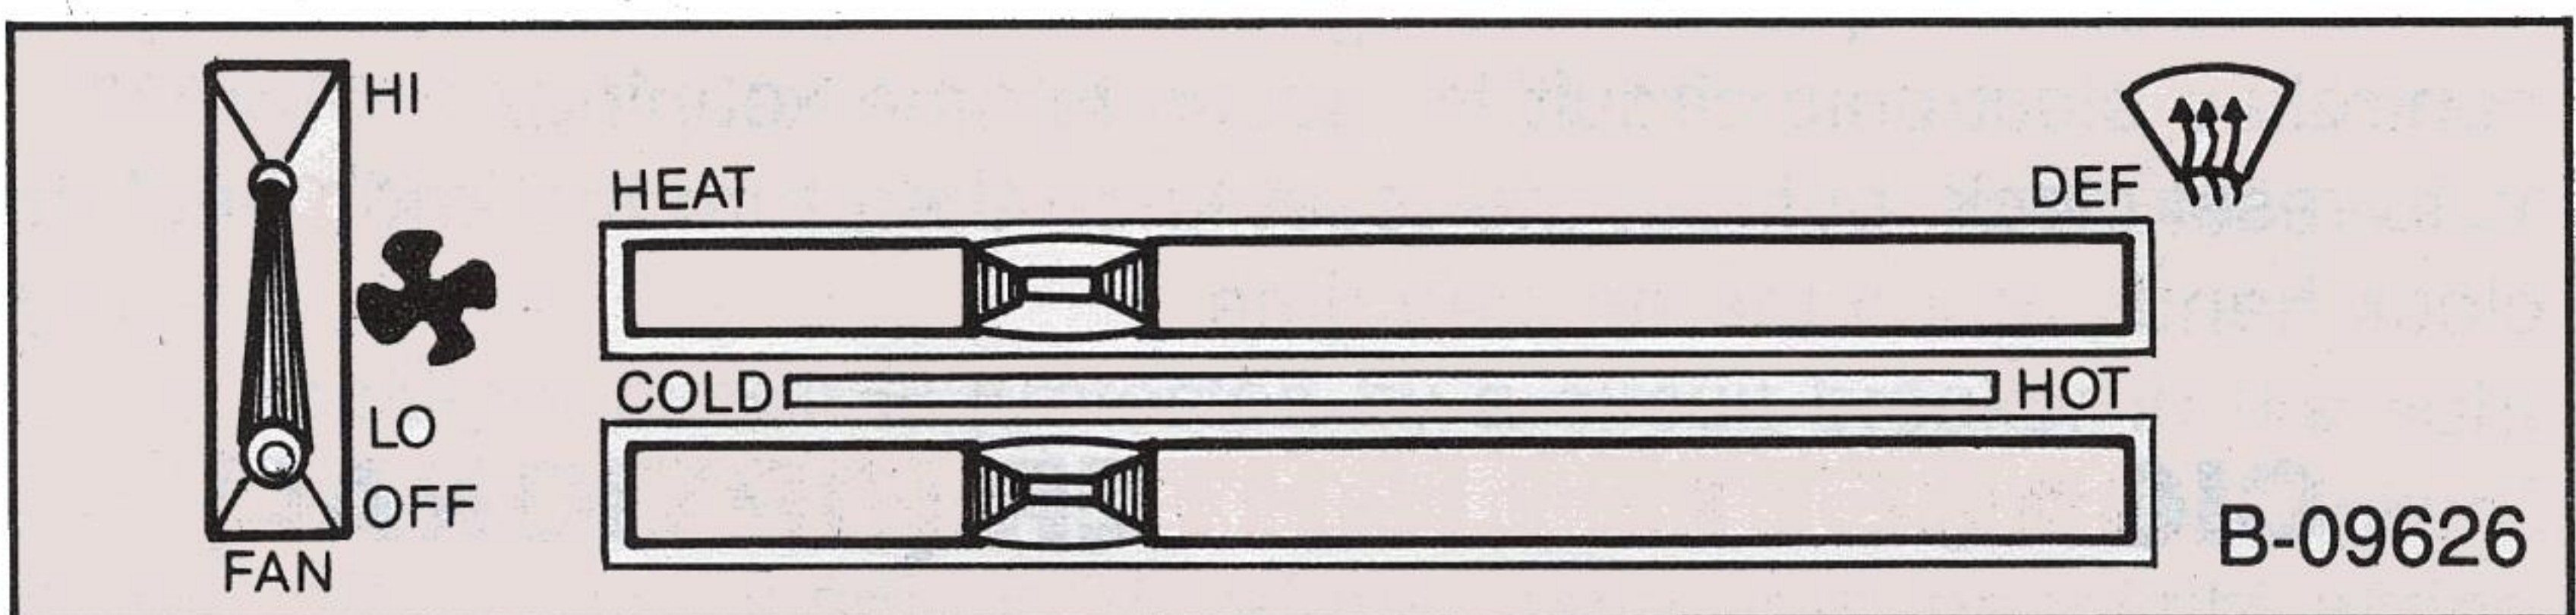

Fan Lever

The fan lever (OFF-HI) provides speed control of the blower fan in all Air Selector Lever positions.

Temperature Control Lever

The temperature control lever regulates the temperature of the air entering the vehicle in all Air Selector positions. The far right position (HOT) provides maximum heated air and the far left position (COLD) provides minimum heated (ambient air temperature) air.

Air Selector Lever

- **HEATER**—In this position, most of the air is delivered through the heater outlet with some air flow to the windshield (defroster outlets). Adjust the Air Selector Lever between HEATER and

DEF (defrost) positions to obtain a variable air distribution between the floor air outlet and the windshield air outlets.

- DEF (Defrost)—In this position most of the air is delivered to the windshield (defroster outlets) with a small amount to the floor outlets.

The windshield defrosting and defogging system assists in providing good visibility through designated areas of the windshield under most inclement weather conditions. Before operating the vehicle, clean the windshield.

Operate the system for 30 seconds before switching to DEF. This removes humid air from the system and minimizes fogging of the glass which can occur if humid air is discharged onto a cool windshield.

Heater Output (Diesel Engines)

During extended idle at cold ambient temperatures, the heater will discharge cool air. This is caused by low fuel consumption and a low heat rejection. Higher coolant temperatures are obtained under high-speed, high-load conditions. Also, low coolant can cause cool heater air at high engine speeds. Check the coolant level. Refer to "Cooling System," Section 5.


AUXILIARY HEATER

The auxiliary heater supplies heat when the fan switch is in any position except OFF. In the OFF position, a coolant control valve closes to prevent unwanted heat during warm weather.

FAN—The three speed fan switch is located in the instrument panel to the right of the steering column.

AIR CONDITIONING SYSTEM — FOUR SEASON

During A/C operation, the air conditioning compressor cycles off and on to maintain temperature. This causes a slight increase and decrease in engine power and speed to operate your system.

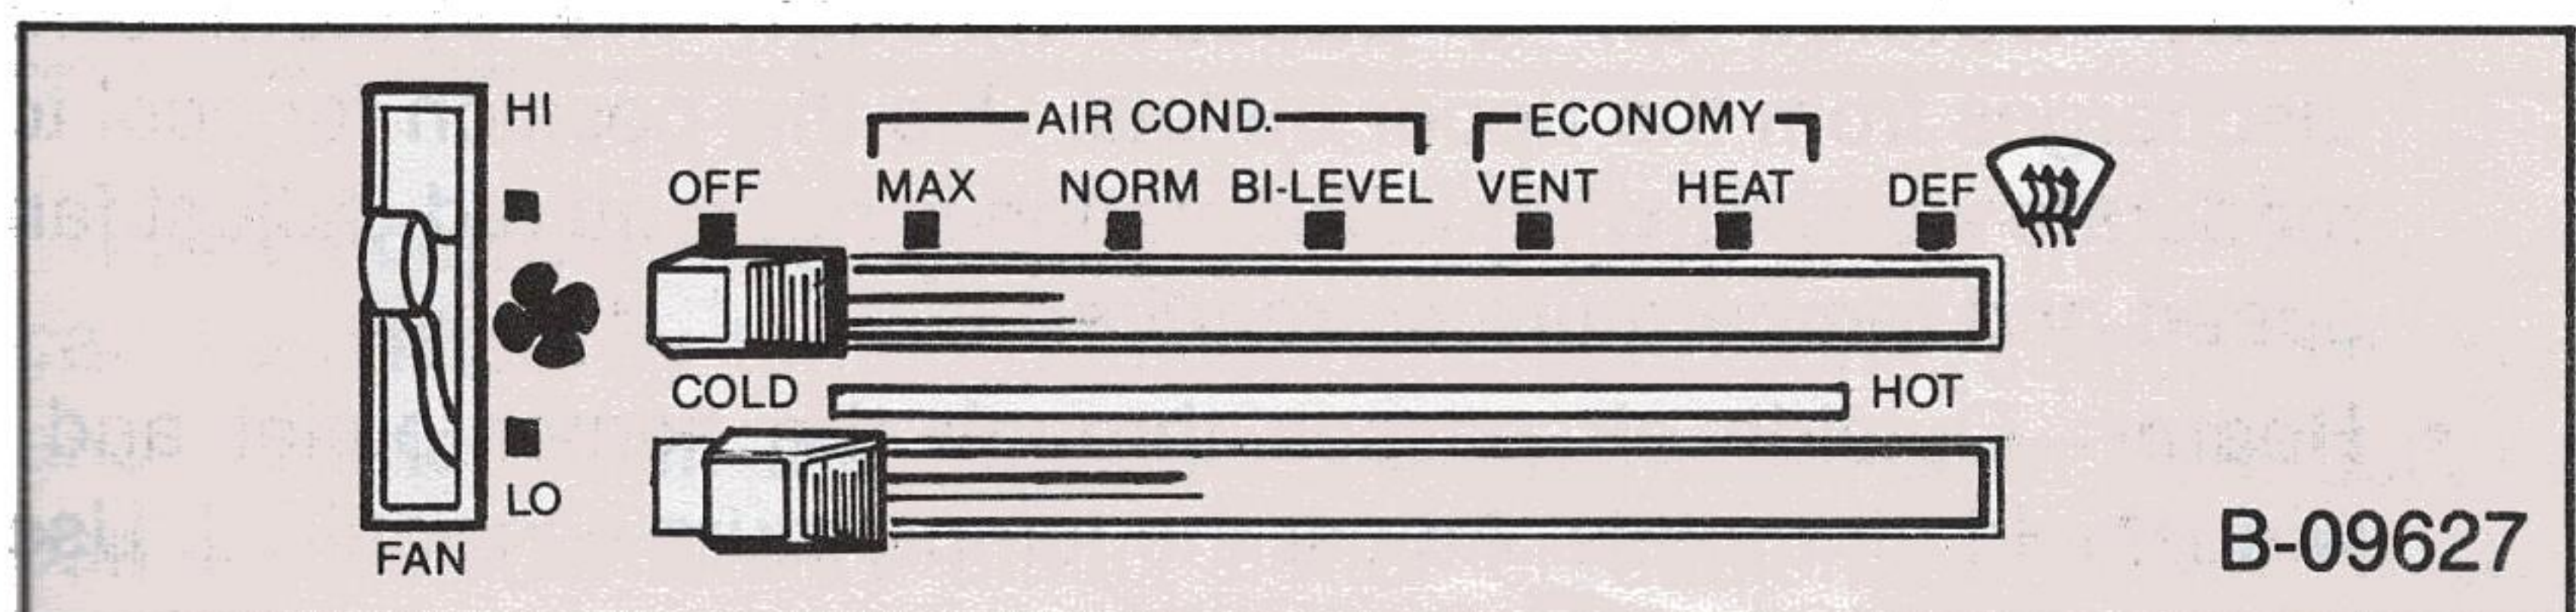

Fan

The fan lever has four (4) positions from Lo at the bottom to Hi at the top. When the air conditioning system is OFF, the blower will be off.

Temperature Selector—Lower Lever

The temperature lever allows a selection of air temperature from Cold at the far left to Hot at the far right.

Operation Selector—Upper Lever

This lever provides a selection of systems available to handle various heating and cooling requirements.

- **Off**—The system and the blower do not operate.
- **Max A/C**—Air from the passenger compartment is recirculated through the system (with some outside air) and discharged from the A/C outlets. Select the fan speed in the **MAX** position.

The Maximum A/C position, with temperature lever in full COLD, is used when maximum cooling is required.

- **Norm A/C**—Outside air passes through the system and discharges through the upper outlets. Use this position for most air conditioning situations. Vary fan speed and temperature as required.
- **Bi-Level A/C**—Outside air is passed through the system and delivered from the heater lower outlet and upper outlets to provide comfort and keep the windshield and side glass clear under low fogging conditions. Use this position for cool but sunny days.
- **Economy Ranges**—Use these positions, “VENT” and “HEATER” for greater fuel economy. The A/C compressor will not operate in these positions.
- **Vent**—Outside air is passes through the system and discharges from the upper outlets. Use this position for cool to moderate weather when refrigeration is not required. Adjust fan speed and temperature as required.
- **Heater**—Outside air passes through the heater outlet and windshield air outlets. Adjust the temperature as required. Use this position for most winter driving.
- **Def**—Outside air passes through the windshield air outlets and the lower air outlet. Adjust temperature and blower speeds as required. Use this position for severe fogging and icing only.

ROOF-MOUNTED AIR CONDITIONING

The optionally available roof-mounted air conditioning unit is used with the air conditioning system.

Since both systems use the same refrigerant, a blower switch on the instrument panel controls the optional roof-mounted air conditioning system.

In the OFF position, the blower does not operate even though the refrigerant is circulating in the system if the front system is ON. To operate the rear overhead system, select the blower speed. Use the rear blowers to circulate interior air regardless of front system operation.

AIR CONDITIONING OPERATING TIPS

Before using the system, open the windows to permit hot air to escape. Close the windows when using the system.

DELCO SOUND SYSTEMS

Your vehicle may have one of several optional Delco GM Sound Systems. (To listen to any system, the ignition must be in "Run" or "Accessory.")

GENERAL INFORMATION

Speakers


NOTICE: All Delco Sound Systems have ungrounded speakers. Installing add-on tape players, CBs or other units that use the vehicle speakers may damage your Delco Sound System and impair operation of the added unit. Please consult your dealer in advance if you are considering additions.

FM Reception—Although FM is normally static free, reception can be limited by terrain, atmospheric conditions, station strength and distance from the transmitter. Buildings or other obstructions can cause momentary static, flutter or station swapping. If you cannot keep good reception, tuning to a stronger station will bring improvement.

Stereo Sound—All Delco Sound Systems with an FM stereo radio will switch to stereo operation whenever an FM stereo broadcast is

being received, and an indicator in the dial will light. "Stereo" operation means the radio is separating a stereo broadcast back into the original two channels, called "left" and "right." Stereo sound is noticeably more realistic to the ear.

Basic Controls—Although a wide variety of features are offered, the following basic controls are common to all systems.

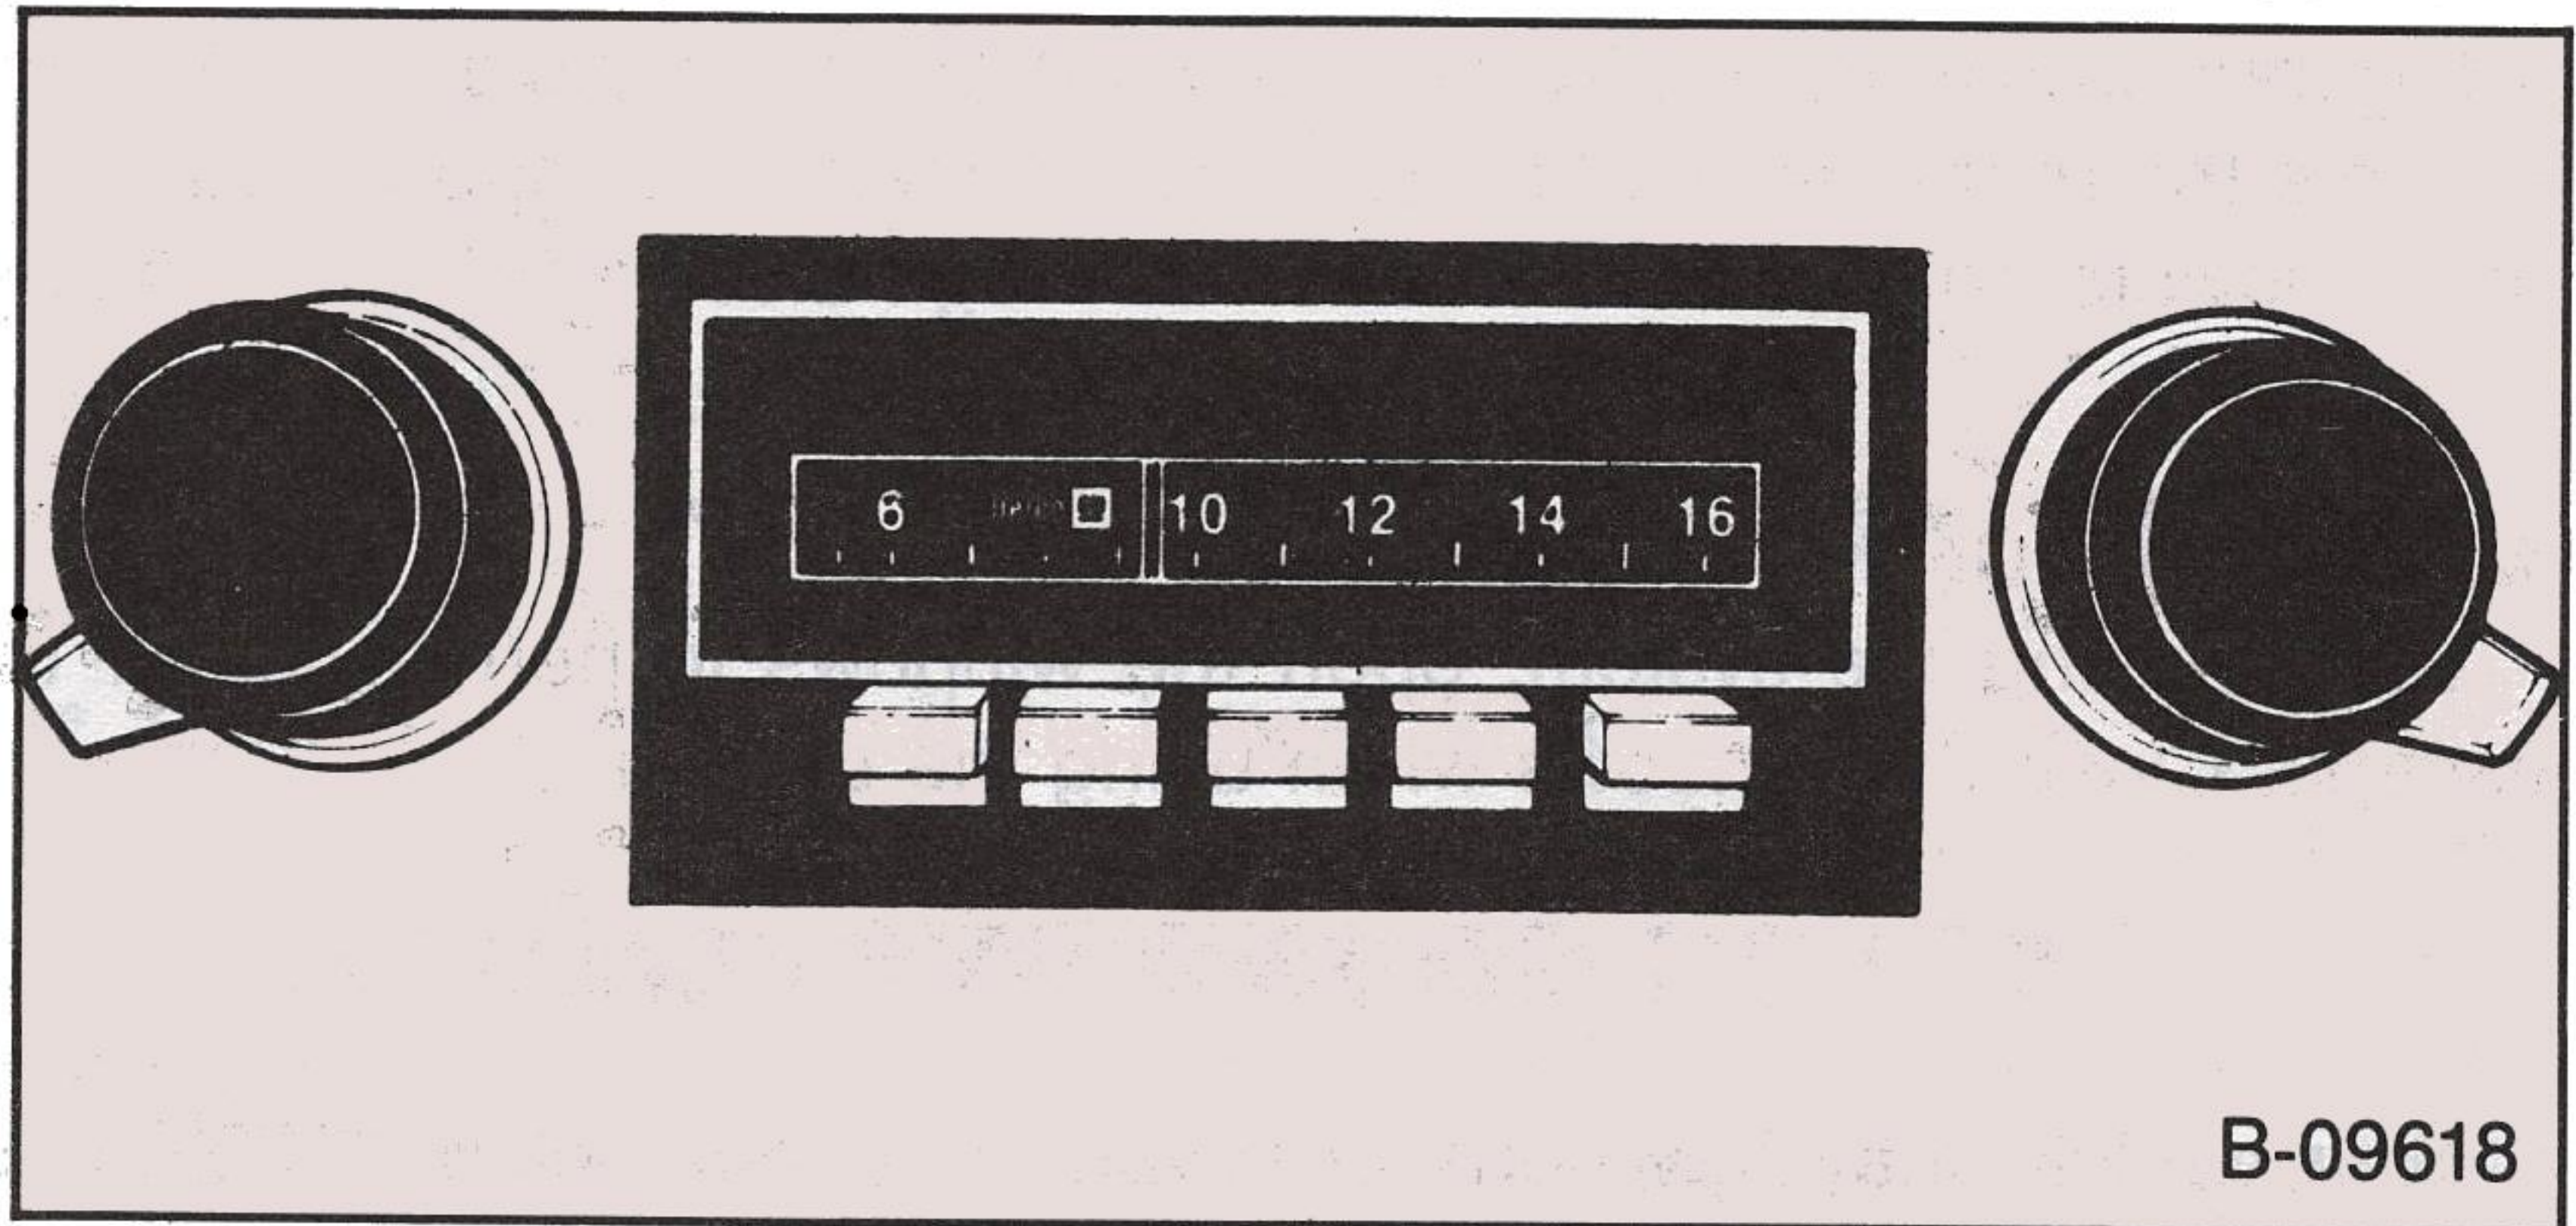

- **Left Knob**—This knob turns the radio on or off, and controls the volume. Behind the volume knob is a tone control. When turned to the right, it increases treble and voice clarity; when turned to the left, it increases bass.
- **Right knob**—This knob is a manual tuning control for choosing radio stations. For radios with rear speakers, a fader control is behind it. This control adjusts the sound between the front and rear speakers.
- **Push Buttons**—Each radio has five buttons you can use to easily select your favorite stations. After using a push button, you may have to "fine-tune" the radio by hand for the best reception.

To "set up" the push buttons:

1. Manually tune to the desired station.
2. Choose the button you wish to use. Pull it straight out, then press it back in firmly until it stops.
3. Do this for each of the five buttons.


On Delco AM-FM radios, you may choose five AM stations and five FM stations for a total of ten selections. Do this by sliding the selector bar to the right and setting each button for AM stations. Then, slide the bar to the left and do the same for FM stations.

NOTICE: Do not slide the selector bar if any push button is pulled out or you could damage the radio.

AM MONAURAL RADIO


This radio receives AM broadcasts. The controls work as previously described.

AM-FM MONAURAL RADIO

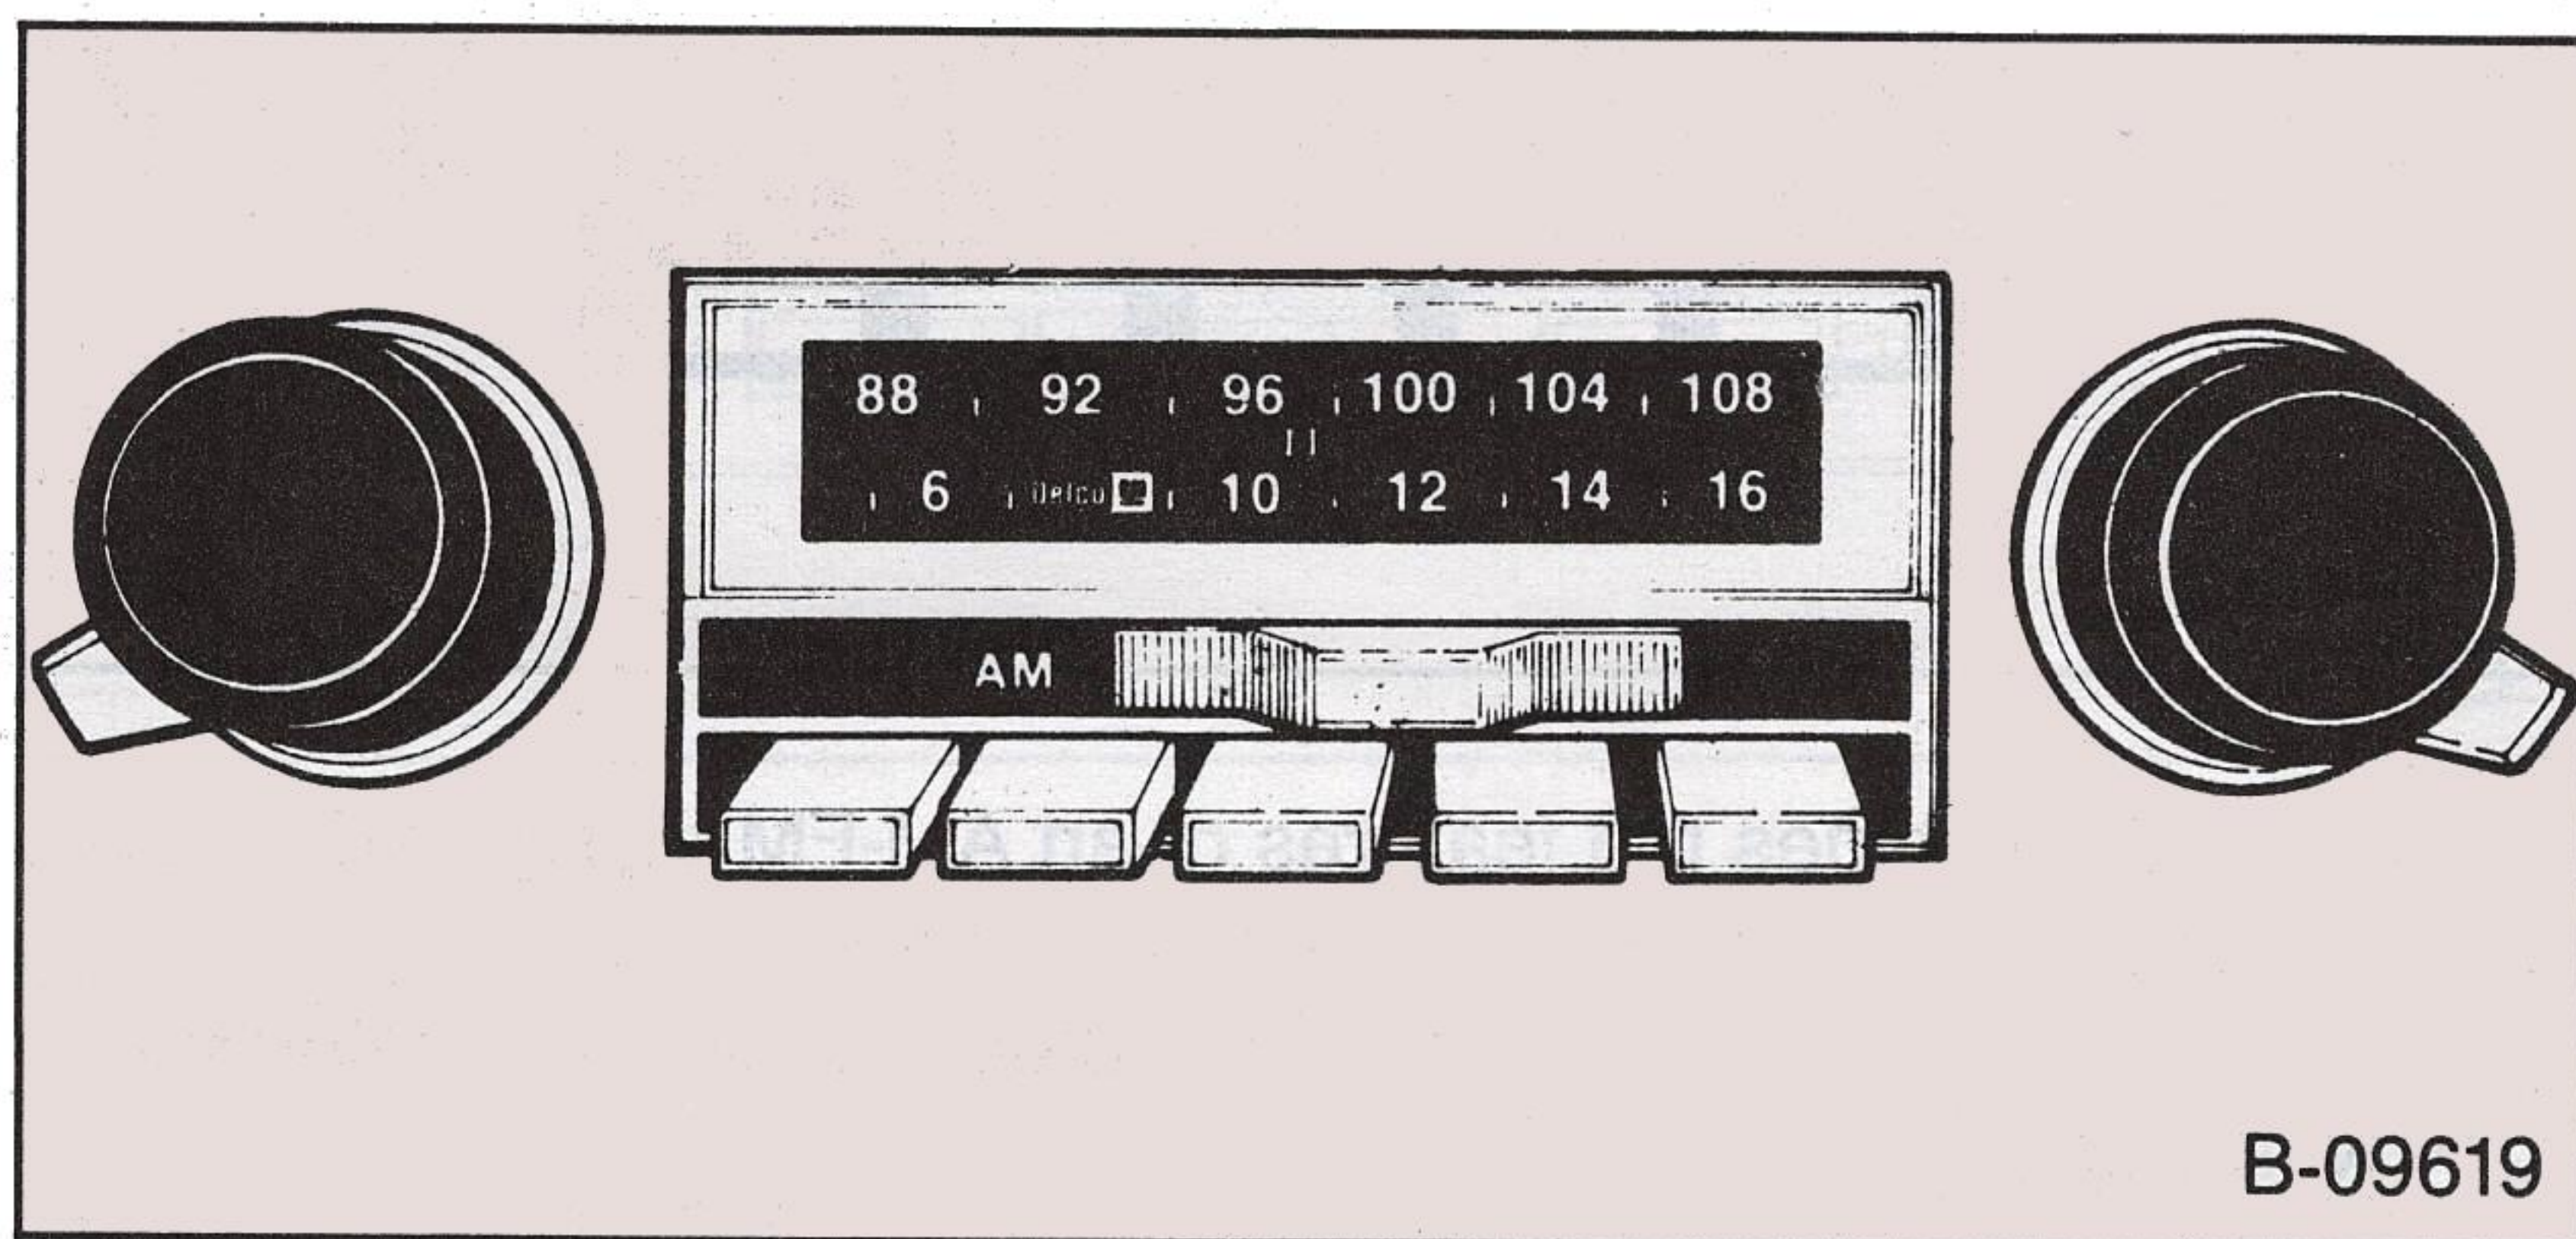


This radio receives FM as well as standard AM broadcasts. Choose the desired band by sliding the selector bar to the right for AM, or to the left for FM.

AM-FM STEREO RADIO

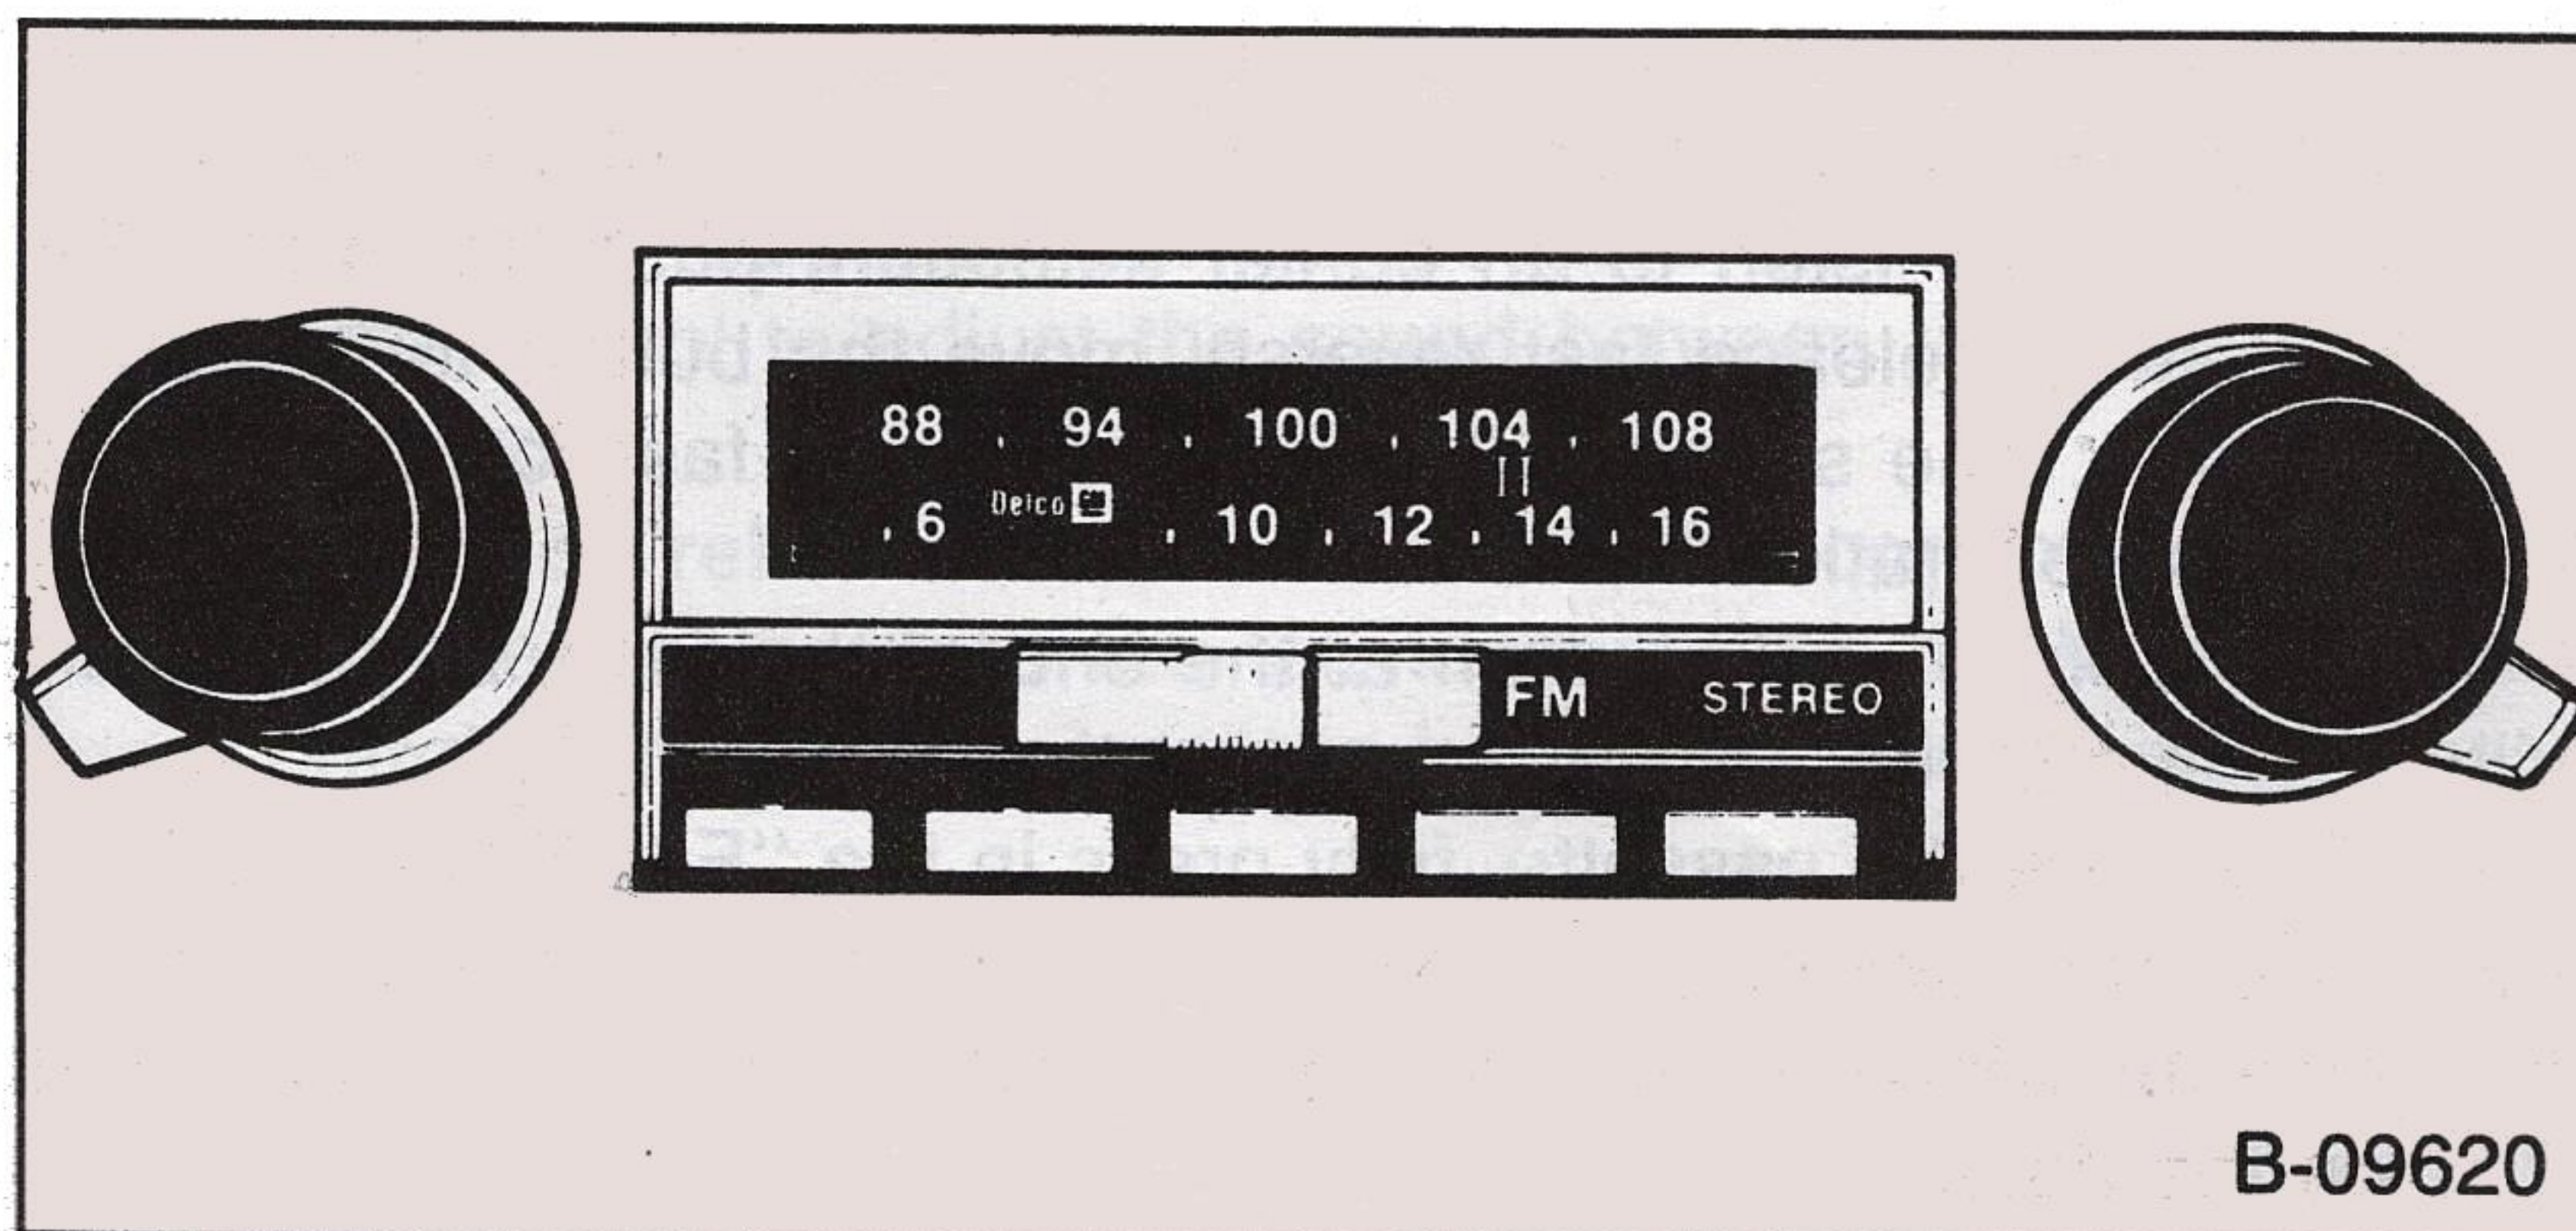

This radio works the same as the AM-FM monaural radio. Be sure you also read "Speakers" and "Stereo Sound" for more information.

AM-FM STEREO WITH STEREO CASSETTE TAPE

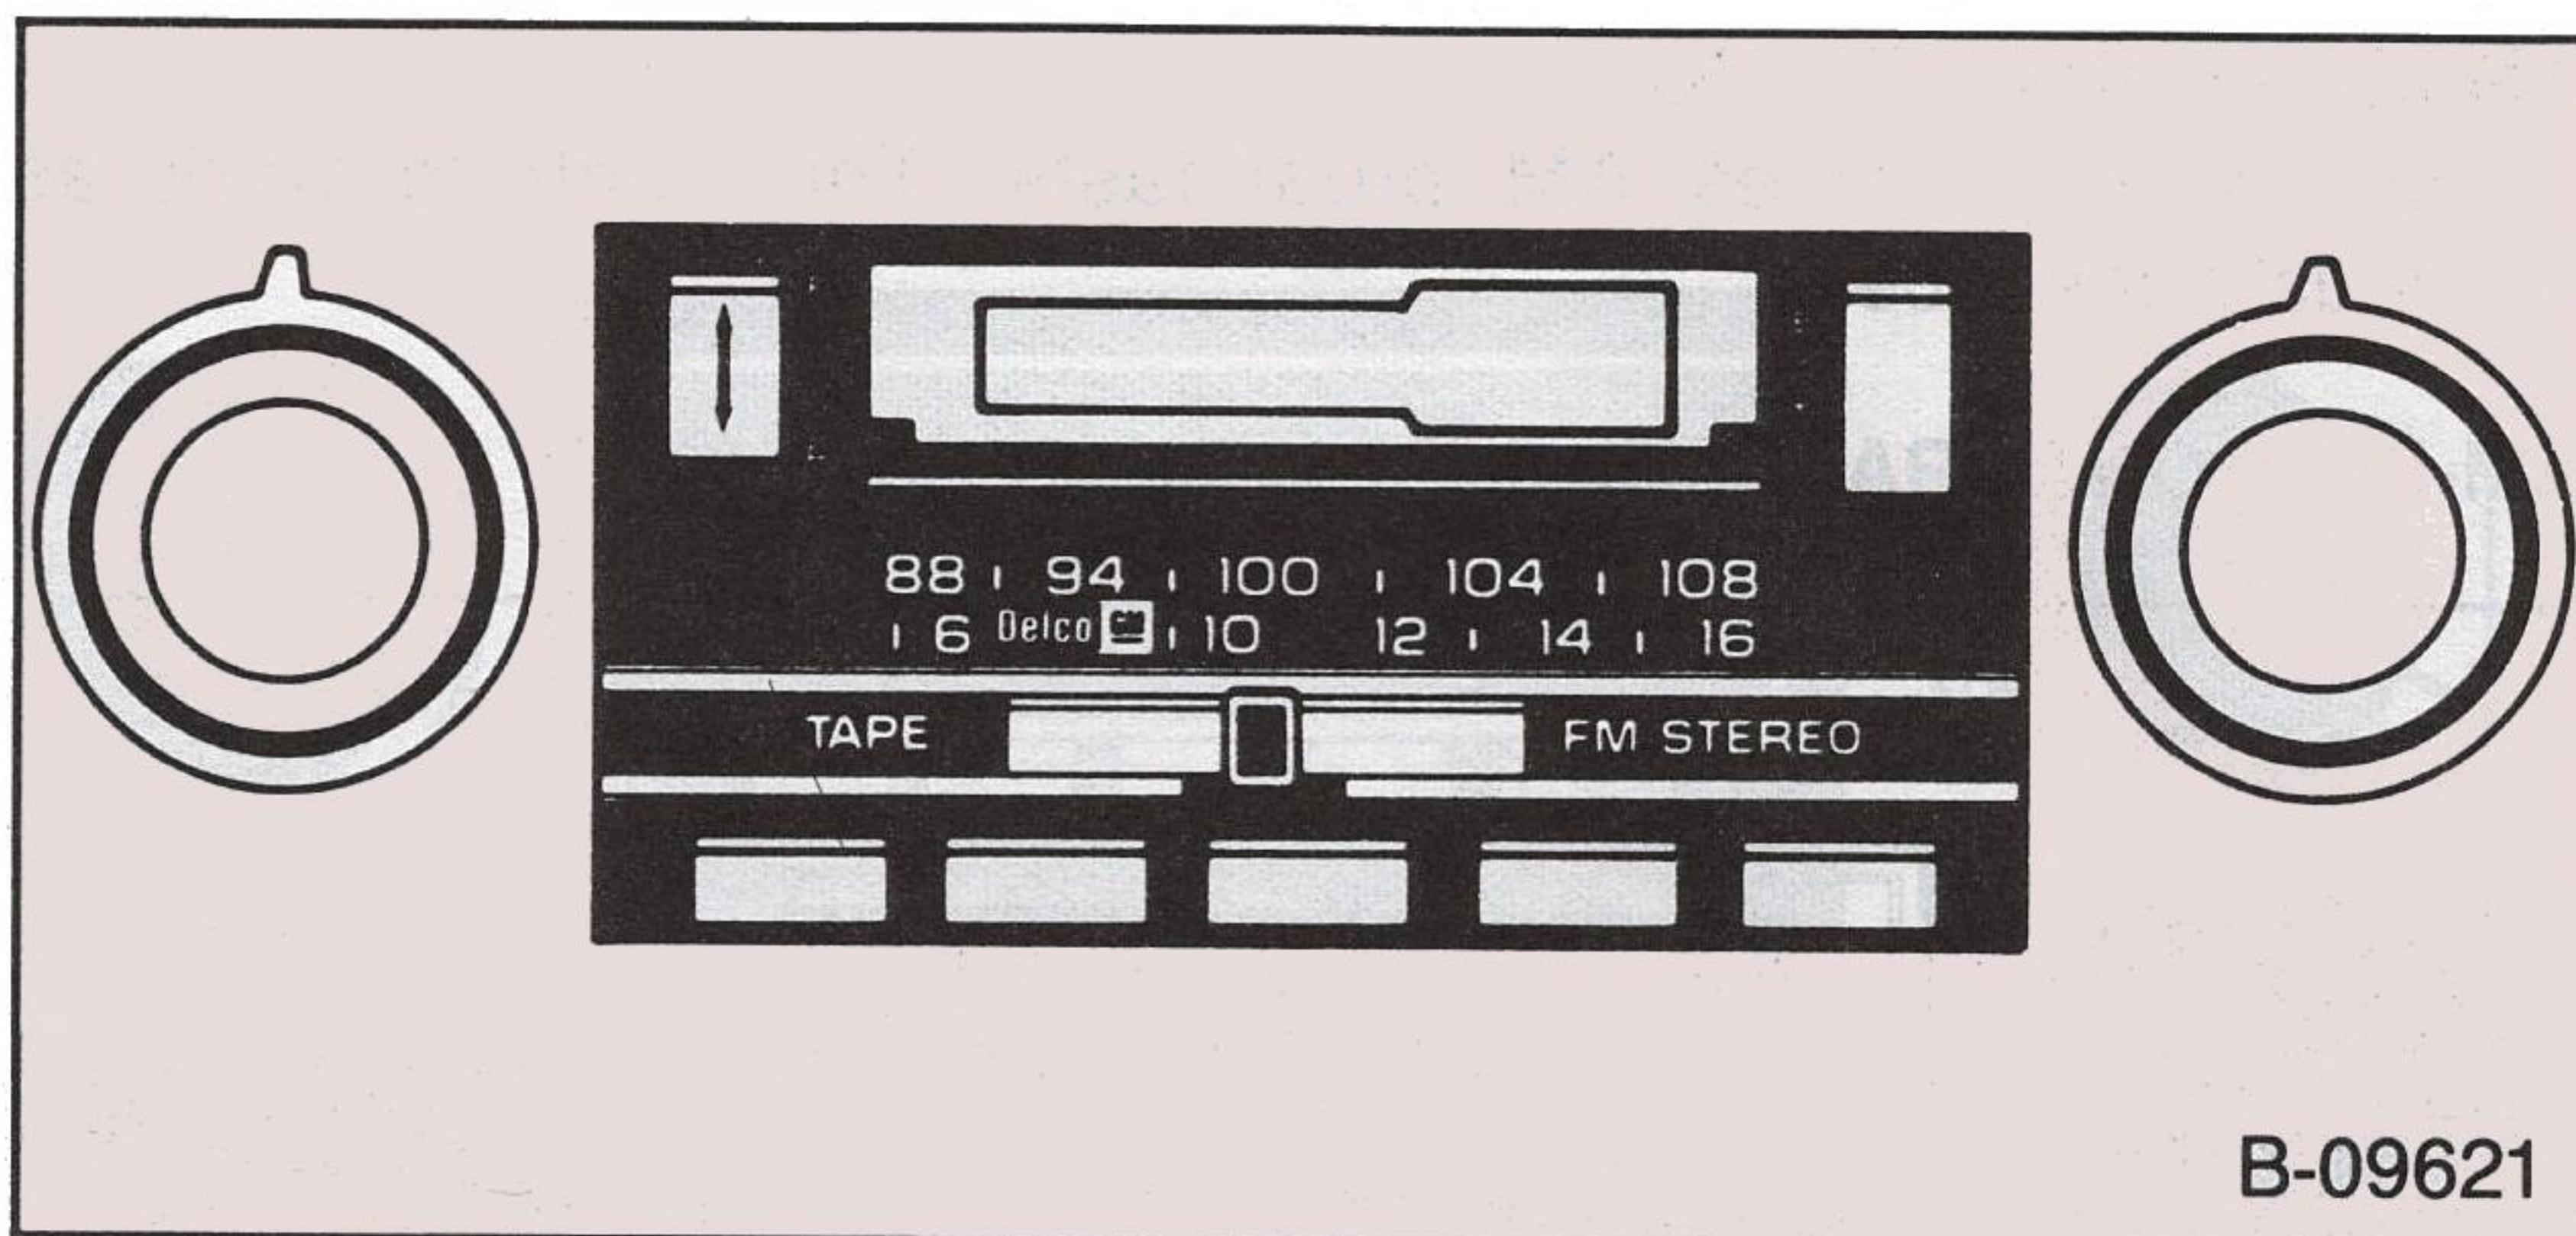

This radio combines the features of an AM-FM stereo radio with a stereo cassette tape player. To play a cassette tape:

1. Turn the radio on. (On very cold days, allow a few minutes for warm-up.)
2. Insert the cassette squarely through the door above the radio dial, as shown on the door. This electronically switches the unit from radio to tape operation. If the sound is garbled (or there is no sound), eject the tape and reinsert it squarely.
3. After the cassette has snapped into position, adjust the volume and fader controls to your preference.
4. To quickly advance to the next selection, push the combination fast forward/fast reverse (F/R) button to F until it locks. To release the fast forward lock, return the F/R button to its center position. To listen to an earlier selection, push down the F/R button. To release fast reverse, move the button to its center position. The sound will be muted during fast forward or fast reverse operation.


The tape player will shut off at the end of the tape, but the radio will not resume playing until you eject the cassette.

1. To remove the cassette, fully press in the "EJCT" button.
2. To change to the second program: eject the cassette, turn it over (end-for-end) and reinsert it, again according to the outline on the door.

Remove the cassette when not in use. Cassettes which are 30 or 60 minutes long will give the best results.

See also "Tape and Tape Player Care" for maintenance information.

ETR AM-FM STEREO (SEEK/SCAN) WITH CLOCK AND AUTO-REVERSE CASSETTE

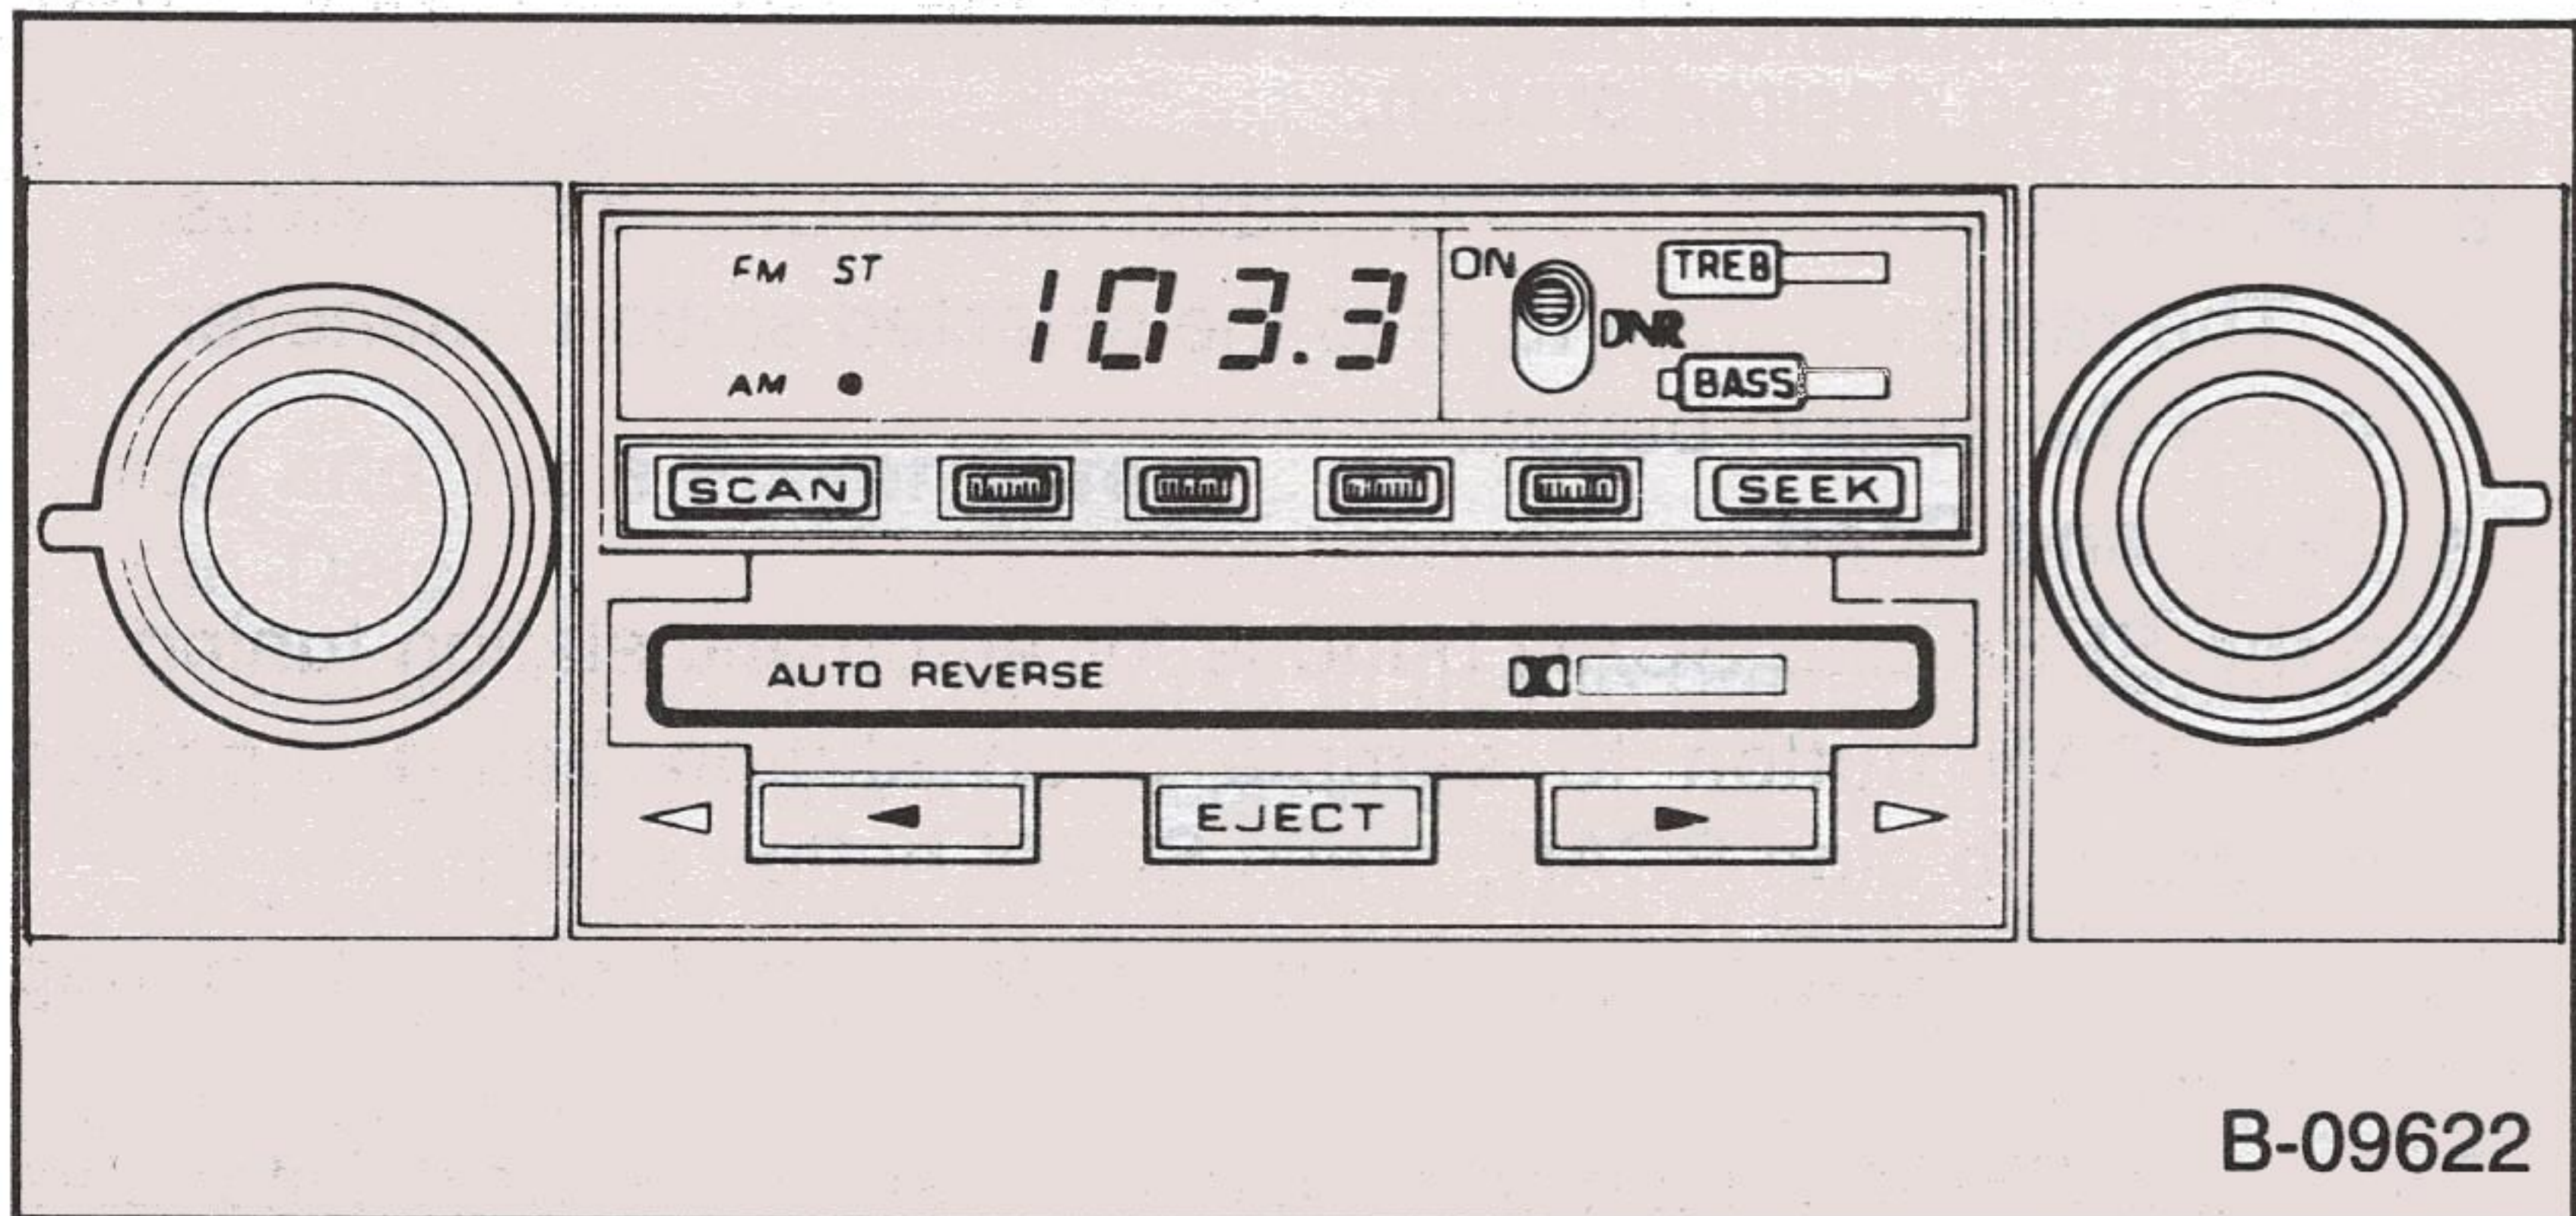

To operate the ETR AM-FM Stereo radio:

- **Left Knob**—rotate knob to turn radio on or off and to control volume. Press knob to recall station frequency when listening to the radio with the ignition on, or to display time-of-day with ignition off. Press knob to select the other side of the tape when the cassette is playing.
- **Balance Control** (located behind left knob) — turn to adjust left/right speaker balance.
- **Right Knob**—rotate knob to tune radio stations manually. Frequency will be displayed during tuning. Press knob to alternately select AM or FM band.
- **Front/Rear Speaker Control** (located behind right knob) — rotate control to adjust the sound between the front and rear speakers.
- **Bass and Treble Controls** — slide treble control to the right to increase treble, or to the left to decrease treble. Slide bass control to the right to increase bass, or to the left to decrease bass.
- **Dynamic Noise Reduction Switch (DNR™)** — Turn to the "On" position to reduce high frequency hiss on AM, FM, FM Stereo and tape.

NOTE: We recommend that the (DNR™) switch be left in the "On" position.

- **Pushbuttons**

The radio has four pushbuttons you can use to select your favorite stations easily. You may select four AM and four FM stations for a total of eight selections.

To set pushbuttons:

1. Make sure the band switch is on the band you want. Then, tune in the desired station.
2. Gently pull one of the four station pushbuttons and release.

The radio will then tune to the selected station whenever you press the station button.

- **Seek and Scan**

Use the SEEK and SCAN buttons for automatic station tuning.

Press SCAN button to sample each station being received automatically. To stop SCAN, press SCAN button again.

The SCAN indicator light on the frequency dial will be lit during SCAN operation.

Press the SEEK button to locate and retain the next listenable station on the band automatically.

- **Time Set:**

To set the hour, gently pull and hold the SCAN button until the correct hour appears.

To set the minutes, gently pull and hold the SEEK button until the correct minute appears.

The FM stereo indicator will light up whenever an FM station is broadcasting in stereo. "Stereo" operation means the radio is separating a stereo broadcast back into the original two channels, called "left" and "right." Stereo sound is noticeably realistic to the ear.

To operate tape player:

Insert the cassette squarely through the door. This automatically switches the unit from radio to tape operation. If the sound is garbled (or there is not sound), eject the tape and reinsert it squarely.

After the cassette has snapped into position, adjust the volume and fader controls to your preference.

To advance to the next selection quickly, press the button next to the lighted indicator. To listen to an earlier selection press the button next to the unlighted indicator. To stop the forward or reverse movement, press the EJECT button to eject the tape.

When the left indicator light is lit, the top side of the tape is playing. When the right indicator light is lit, the bottom side of the tape is playing.

NOTE: When end-of-tape is reached in one direction, the unit will automatically play the other side of the tape.

When ignition is turned off, the tape is automatically ejected.

Insertion of the cassette tape cartridge overrides the radio and the time-of-day will be displayed continuously.

For best results, use only tapes which are 30 to 60 minutes in length.

Tape and Tape Player Care

On Delco Sound Systems with cassette tape units, take out the cassette tape cartridge when not in use to prevent possible damage to the tape player and to the cassette.

Store cassettes away from extreme heat or direct sunlight. Protect the open ends from dirt or damage; store them in their original cases or other protective cases. Cassettes eventually wear out and you may need to replace them if they become noisy. Optimum performance can be maintained by cleaning the internal tape head capstan and pinch roller periodically. This can be done by inserting a non-abrasive cleaning cassette in place of the music tape.

MOBILE RADIO SYSTEMS

Mobile two-way radio units and mobile telephone equipment are subject to federal rules and must be installed by trained personnel. Certain such equipment or the manner of its installation may possibly adversely affect vehicle operation. Expenses incurred to protect the vehicle systems from the interaction with added mobile communication systems are not the responsibility of GM.

Citizen Band (CB) radios and garage door openers normally will not affect vehicle operation.

FIXED MAST ANTENNA

The fixed mast antenna is designed to withstand most car washes without damage. It cannot be adjusted up or down. If the mast becomes slightly bent, you can straighten it by hand. The mast antenna can be replaced if severely bent (by vandalism, etc.). Mast antennas must be kept clean for good performance.

OTHER CONTROLS AND FEATURES

LOCKING REAR AXLE

The optional locking rear axle can give added traction on snow, ice, mud, sand, gravel, etc. Normally, the locking axle unit works like a standard axle. However, when either drive wheel is on a slippery surface, and the opposite wheel has better traction, the locking unit can continue to move the vehicle even though one of the wheels may be spinning.

Also refer to “Driving on Slippery Surfaces” in Section 2.

AIR CYLINDERS

Some models have front suspensions that are equipped with urethane air cylinders inside the coil springs. Air pressure in these cylinders may be increased or decreased to adjust vehicle trim and minimize “Crash Through” on large road bumps. Inflation pressure should be checked monthly. The inflation valves are located at the lower end of the air cylinders. Inflation pressure must be maintained between 70 kPa (10 psi) minimum and 345 kPa (50 psi) maximum.

FRONT SEAT STORAGE COMPARTMENT (OPTIONAL)

The front seat storage compartment, if equipped, is designed to allow storing items and locking them up. Open by turning the latch clockwise, close with a firm push. The compartment can be locked by using the oval-head key.

INTERIOR LAMP OVERRIDE SWITCH

If your vehicle is equipped with optional auxiliary lighting package the interior lamp override is included. This system is designed to allow the vehicle doors to be open and the interior lamps to be off. The switch is located on the instrument panel below the heater control.


SECTION 3 IN CASE OF EMERGENCY

HAZARD WARNING FLASHER

CONTENTS

Hazard Warning Flasher	3- 1
Emergency Starting Your Vehicle	
Due to a Discharged Battery	3- 2
Engine Cooling System Overheating	3- 4
Jacking	3- 7
Damaged Tires	3-12
Emergency (Wrecker) Towing	3-12
Freeing Vehicle from Sand, Mud, Snow or Ice	3-12

HAZARD WARNING FLASHER

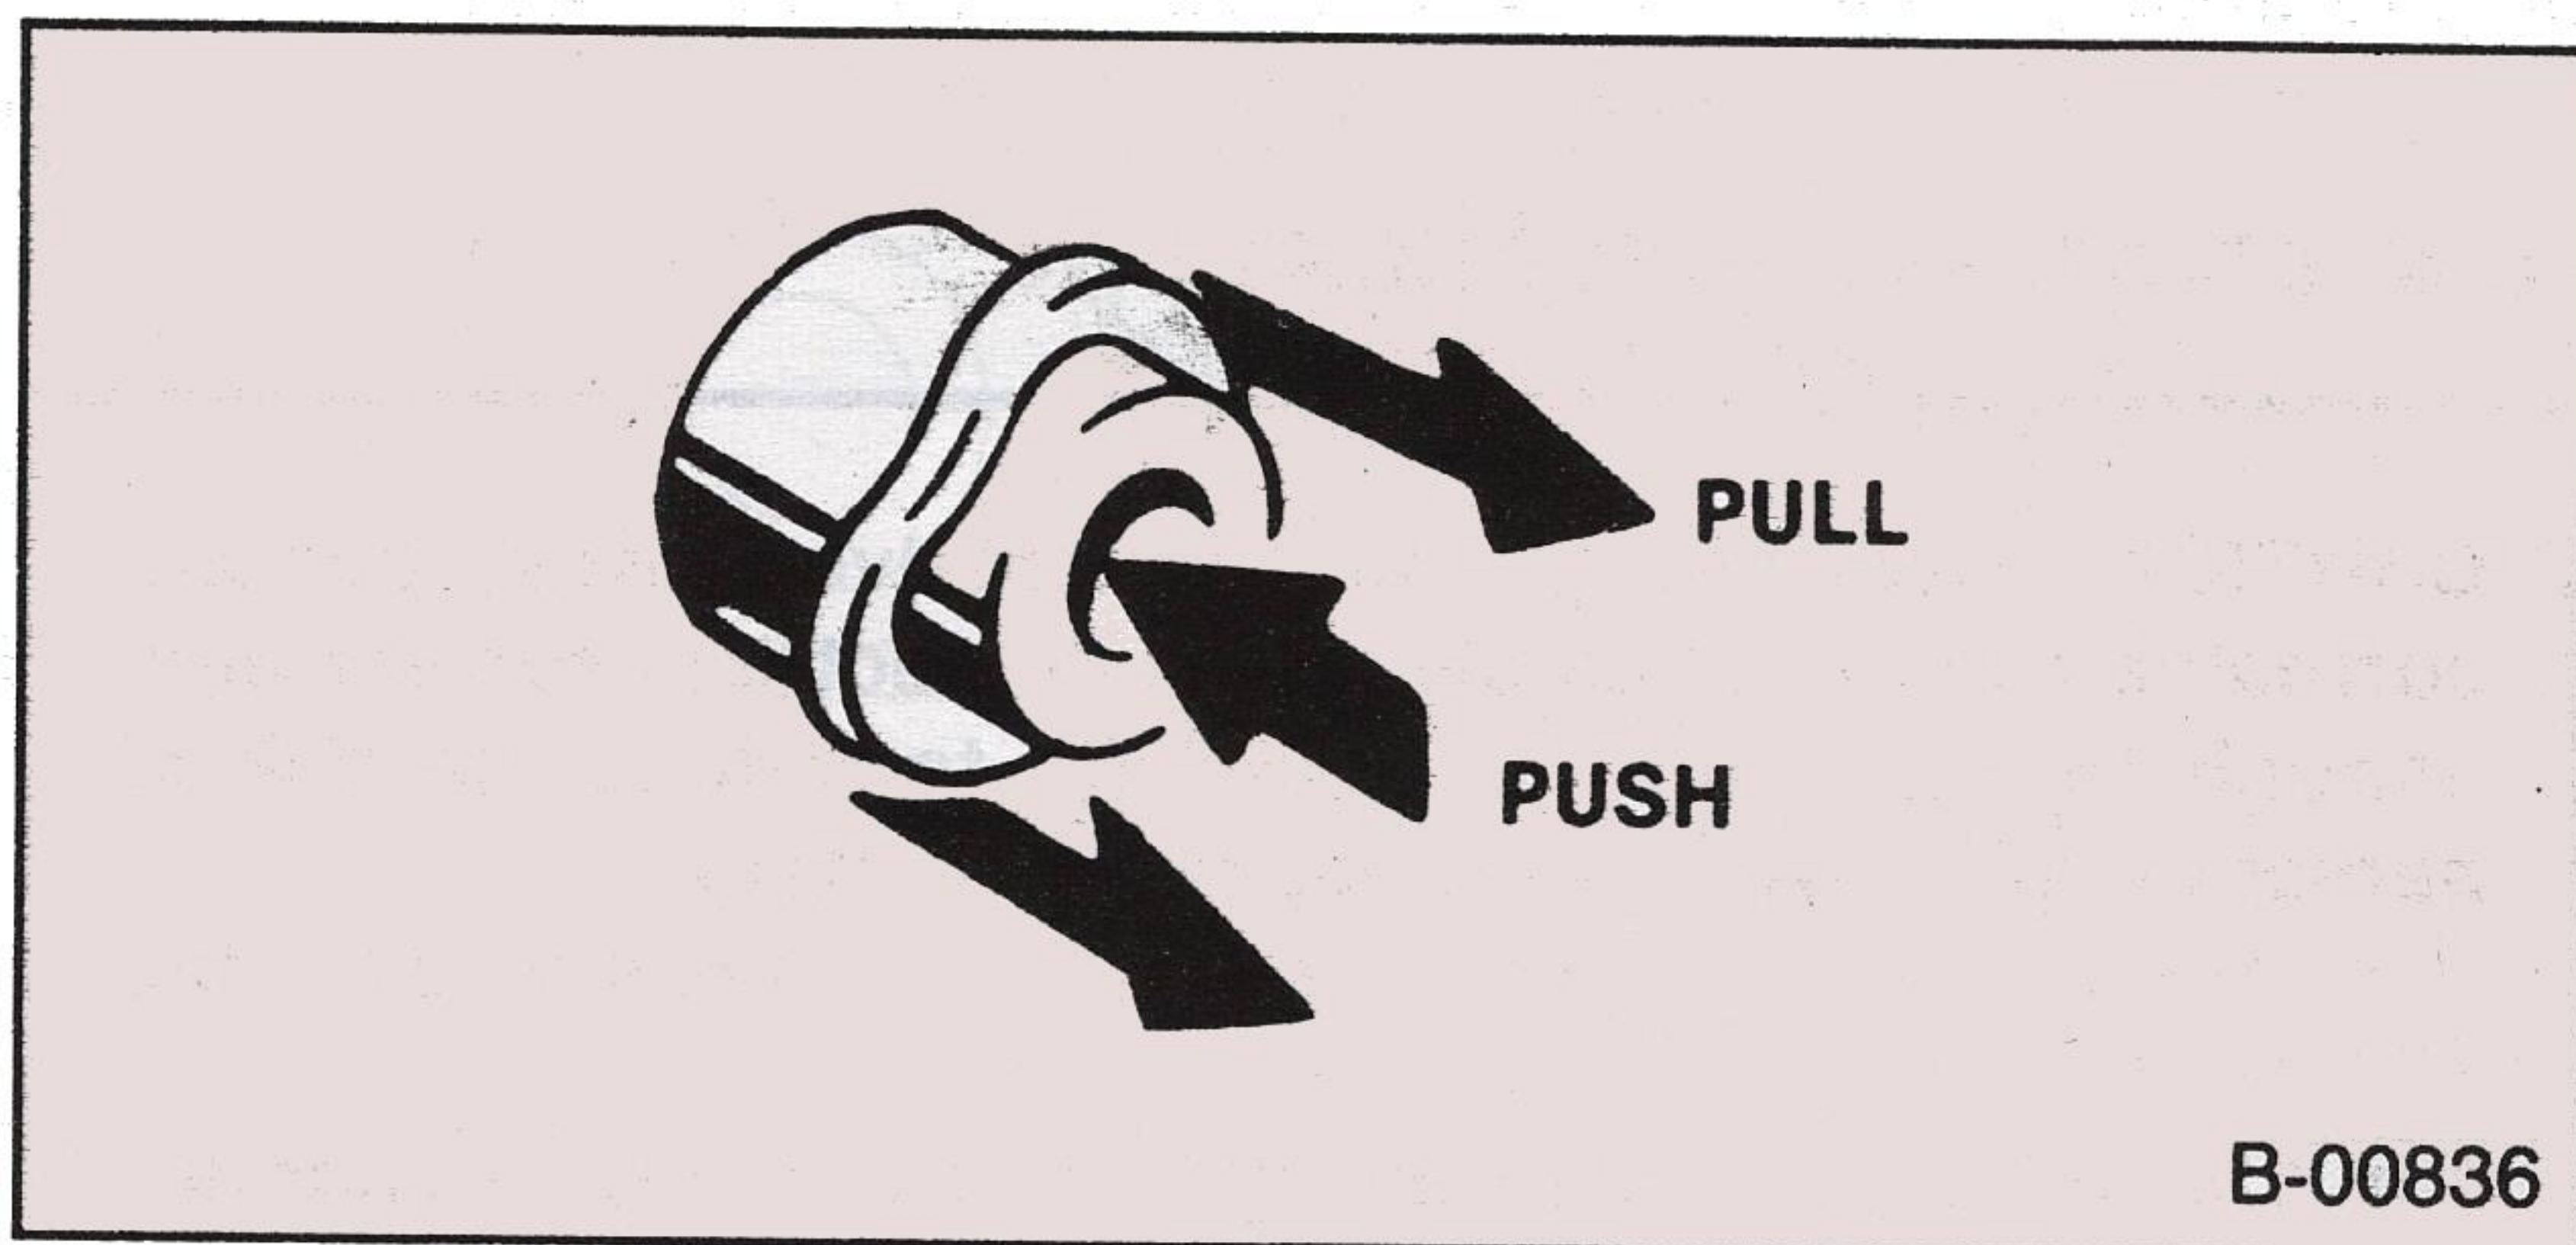

Use the hazard warning flasher to warn other drivers any time your vehicle becomes a traffic hazard, day or night. Avoid stopping on the roadway if possible. To turn it on, push the button (inside the collar) beneath the steering wheel on the right of the steering column. The flasher should work with the ignition either off or on.

The turn signals do not work when the hazard flasher is on. If the brake pedal is pushed down, the lights will not flash until the brake is released. To turn off the flasher, pull the button collar out.

EMERGENCY STARTING YOUR VEHICLE DUE TO A DISCHARGED BATTERY

If your vehicle will not start due to a discharged battery, it can often be started by using energy from another battery — a procedure called “jump starting.” Should your vehicle have an optional diesel engine with two batteries, use only the battery on the passenger’s side when jump starting. Ignore the second battery.

NOTICE: Do not push or tow this vehicle to start it. Under some conditions this may damage the catalytic converter (on gasoline engines) or other parts of the vehicle. Also, since this vehicle has a 12-volt battery, be sure the vehicle or equipment used to jump start your engine is also 12 volt. Use of any other type system may damage the vehicle’s electrical components.

At low temperatures, it may not be possible to start your diesel engine from a single battery in another vehicle. However, you can use your vehicle to jump start another vehicle.

JUMP STARTING INSTRUCTIONS

CAUTION: Batteries produce explosive gases, contain corrosive acid, and supply levels of electrical current high enough to cause burns. Therefore, to reduce the risk of personal injury when working near a battery:

- Always shield your eyes and avoid leaning over the battery whenever possible.
- Do not expose the battery to open flames or sparks.
- Be sure any batteries that have filler caps are properly filled with fluid.
- Do not allow battery acid to contact eyes or skin. Flush any contacted area with water immediately and thoroughly, and get medical help.
- Follow each step in the jump starting instructions.


1. Position the vehicle with the good (charged) battery so that the booster (jumper) cables will reach, but never let the vehicles

touch. Also, be sure booster cables do not have loose or missing insulation.


2. In both vehicles:

- Turn off the ignition and all lights and accessories except the hazard flasher or any lights needed for the work area.
- Apply the parking brake firmly, and shift the automatic transmission to Park (or manual transmission to neutral).

3. Making sure the cable clamps do not touch any other metal parts, clamp one end of the first booster cable to the positive (+) terminal on one battery, and the other end to the positive terminal on the other battery. Never connect (+) to (-).

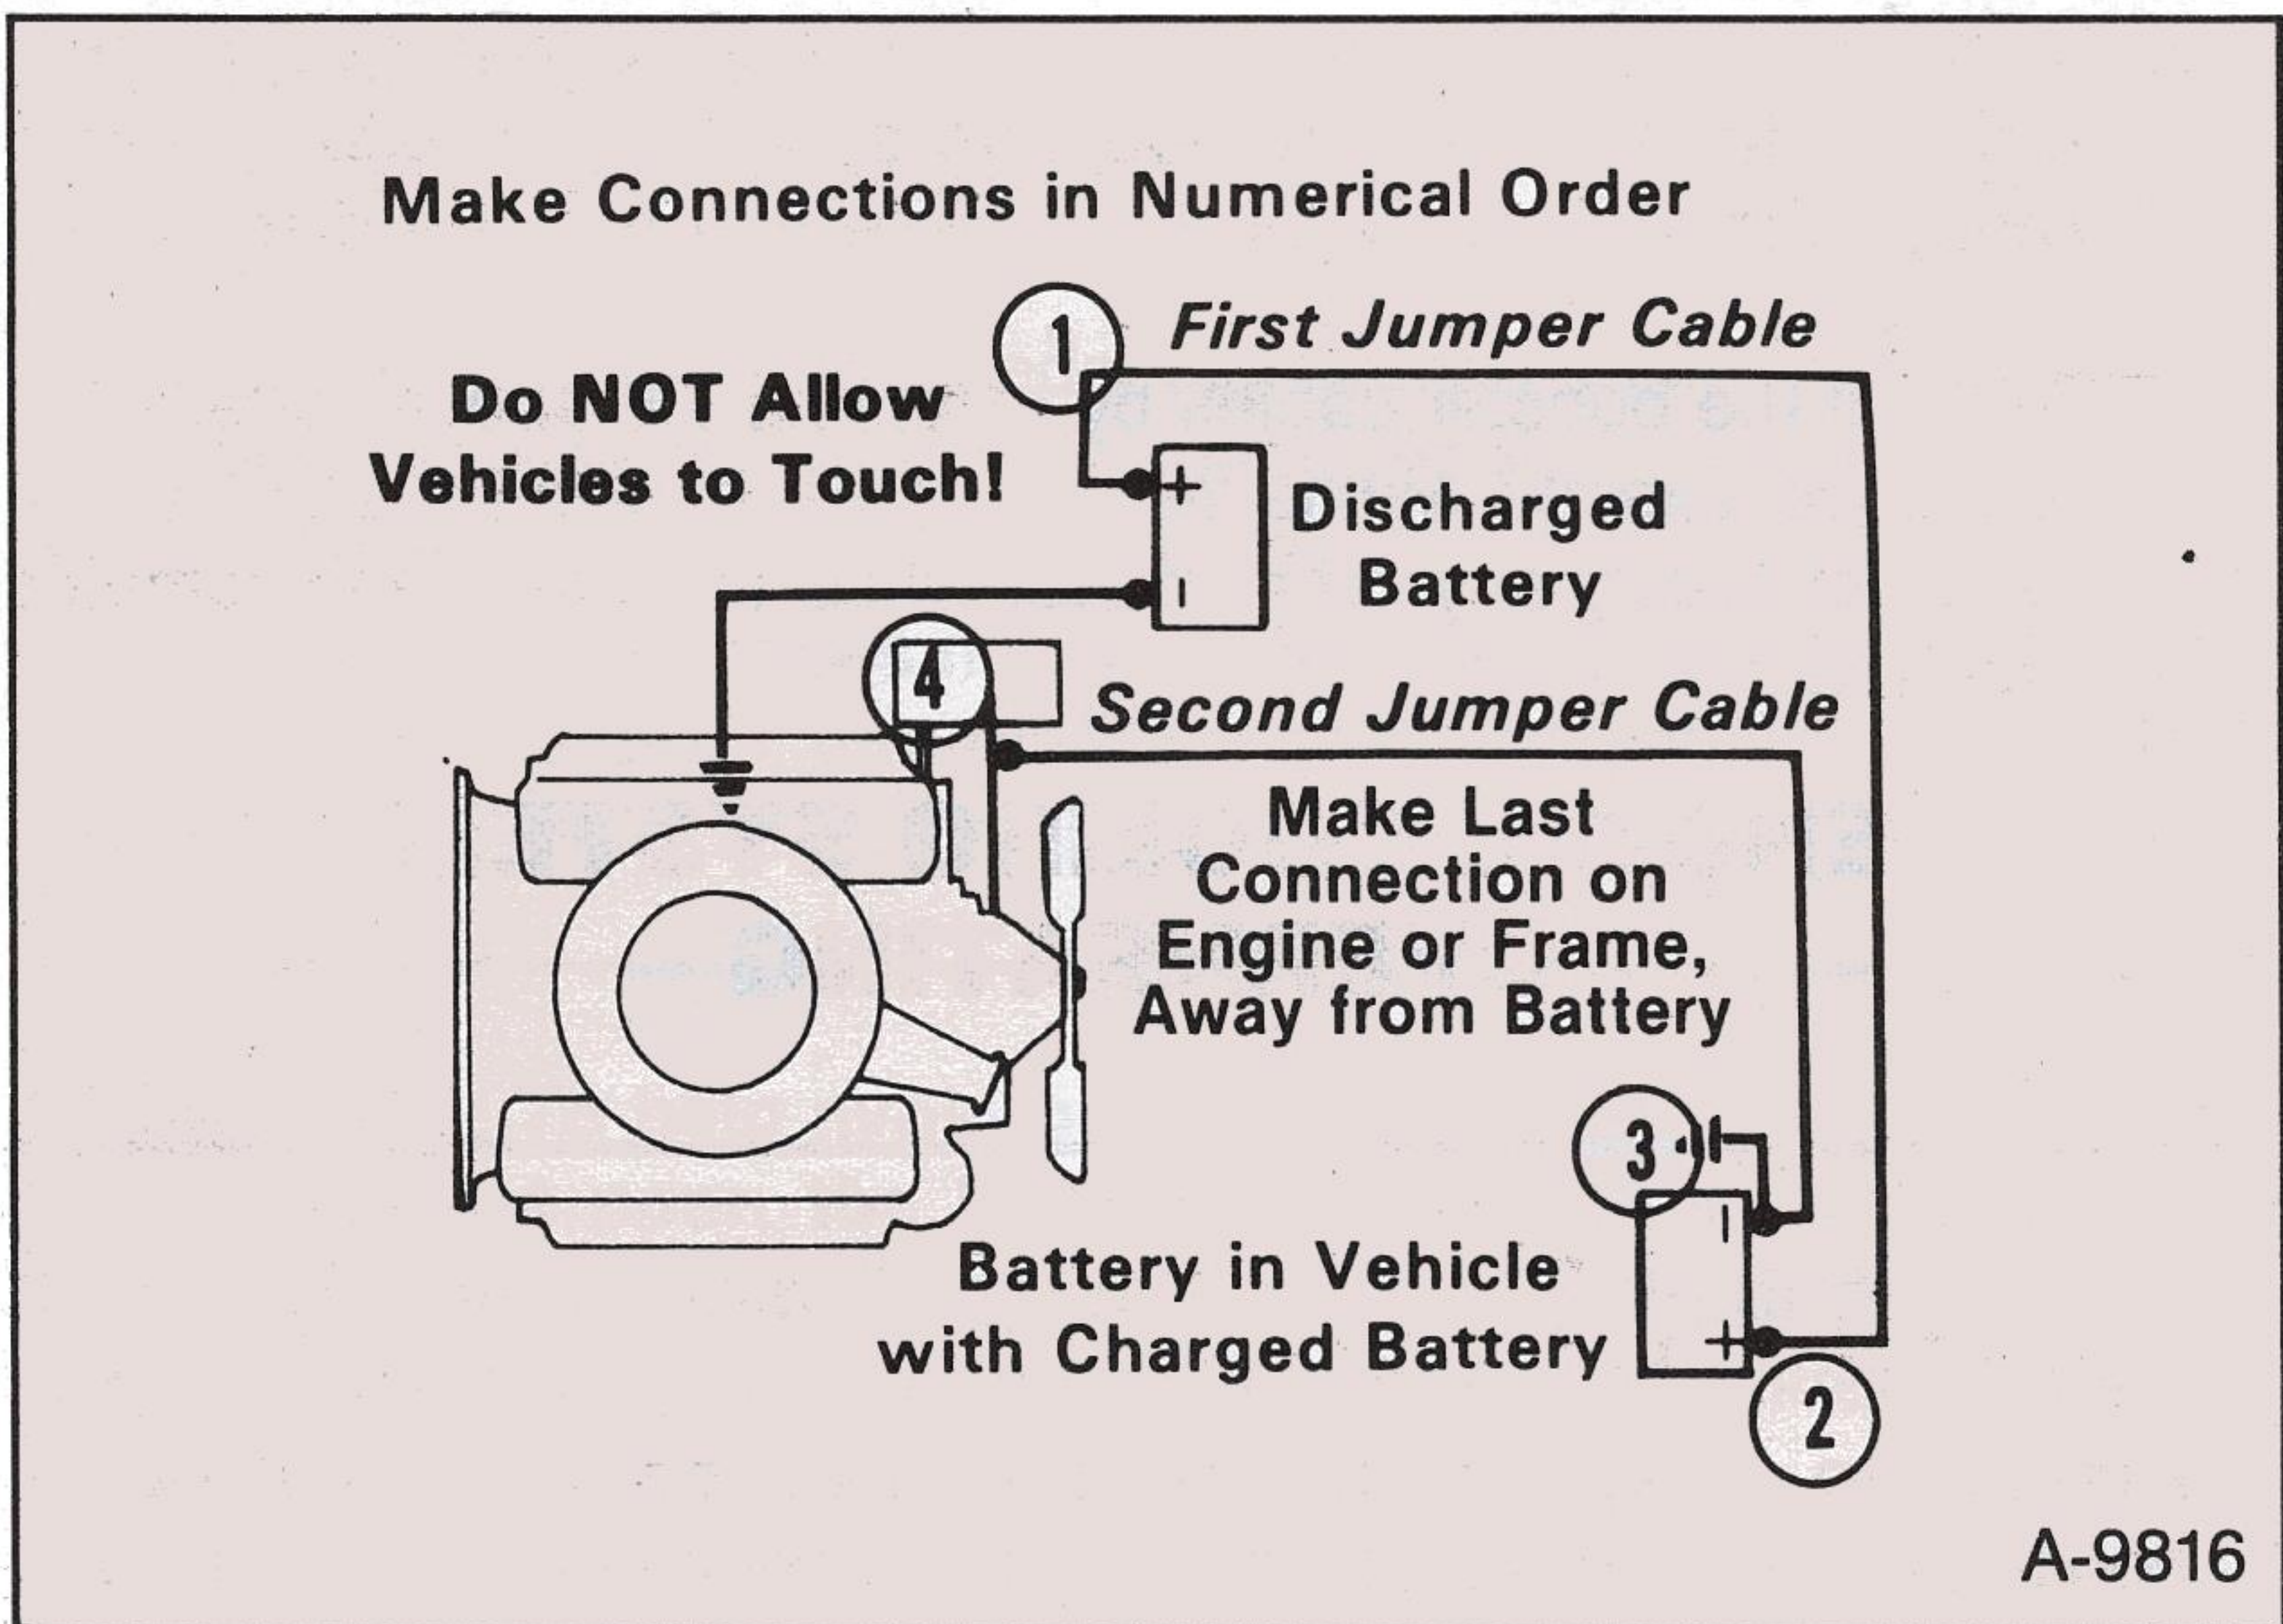

4. Clamp one end of the second cable to the negative (-) terminal of the good (charged) battery and make the final connection to a heavy metal bracket (such as the mounting bracket for the Delcotron generator or air conditioner compressor) on the engine about 450 millimeters (18 inches) from the discharged battery. Make sure the cables are not on or near pulleys, fans, or other parts that will move when the engine is started.

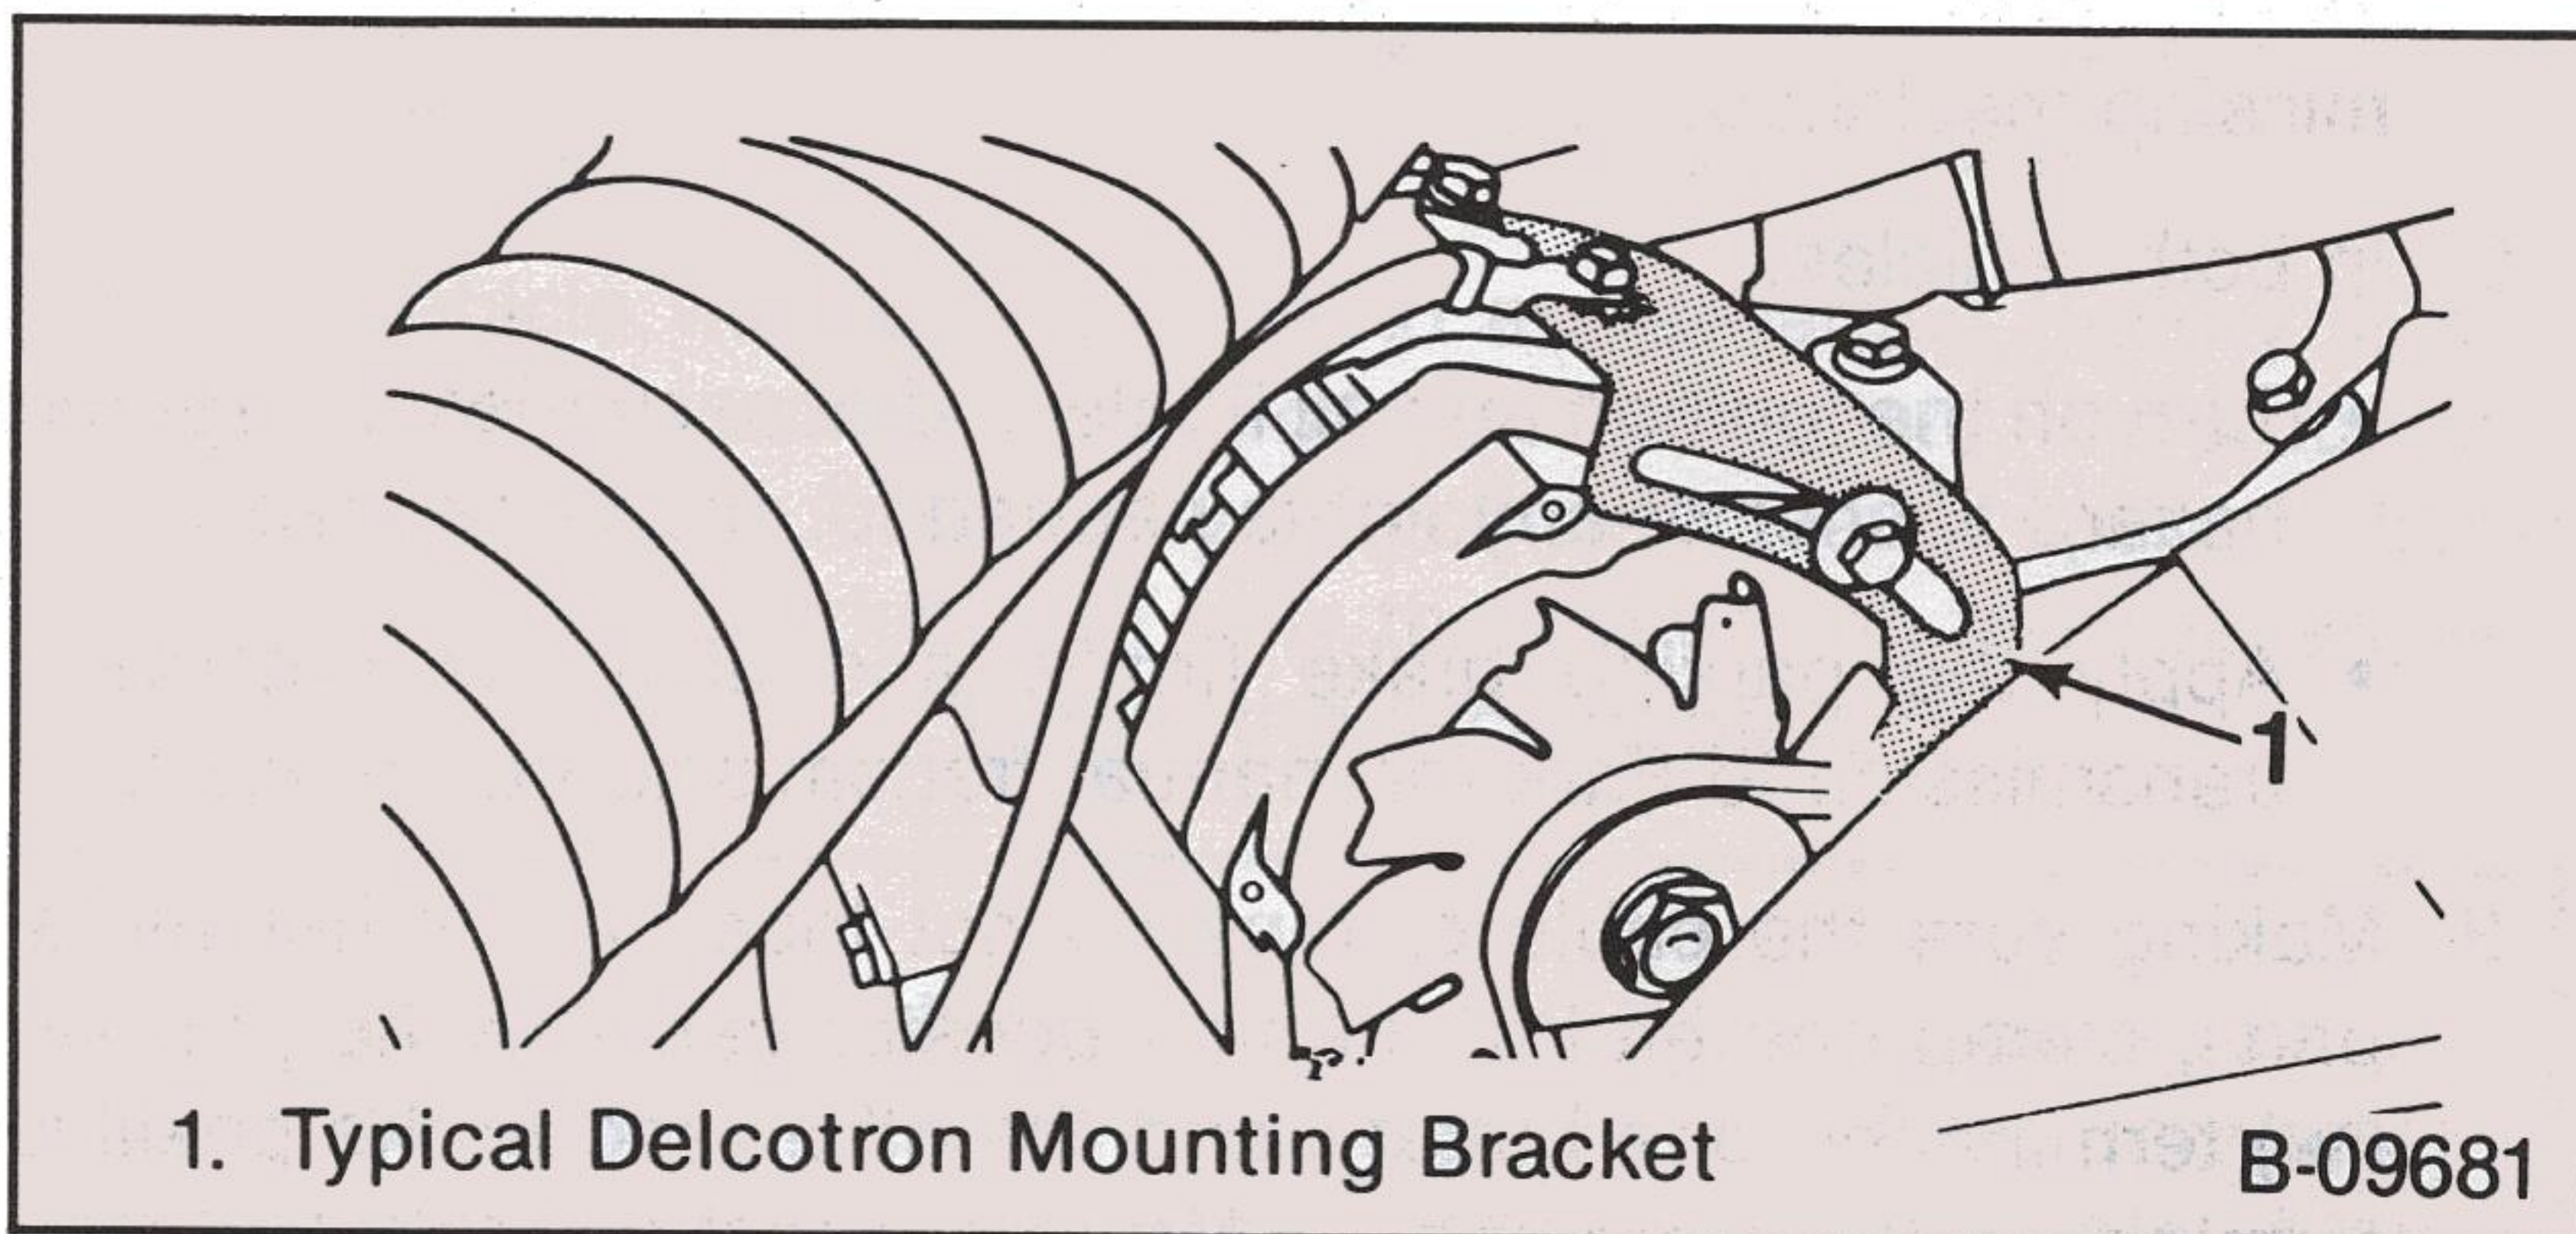

5. Start the engine of the vehicle with the good (charged) battery and run the engine at a moderate speed for several minutes. Then, start the engine of the vehicle that has the discharged battery.
6. Remove the booster cables by reversing the above installation sequence exactly. While removing each clamp, take care it does not touch any other metal while the other end remains attached.

ENGINE COOLING SYSTEM OVERHEATING

CAUTION: If the Engine Coolant Temperature Light or Gage shows an overheat condition or you have other reason to suspect the engine may be overheating, continued operation of the engine (other than as spelled out here) even for a short time may result in a fire and the risk of personal injury and severe vehicle damage. Take immediate action as outlined following.

If you see or hear escaping steam or have other reason to suspect there is a serious overheat condition, stop and park the vehicle as soon as it is safe to do so and turn off the engine immediately and get out of the vehicle.

The cooling system may overheat if the coolant level is too low, if there is a sudden loss of coolant (such as a hose splitting), or if other

problems occur. It may also temporarily overheat during severe operating conditions such as:

- climbing a long hill on a hot day,
- stopping after high-speed driving,
- idling for long periods in traffic
- towing a trailer.

If the Engine Coolant Temperature light comes on (or if you have an Engine Coolant Temperature gage and it shows an overheat condition), or you have any reason to suspect the engine may be overheating:

- If your air conditioner is on, turn it off.
- If you are stopped in traffic, shift the transmission to Neutral.

If the warning light does not go off (or engine coolant temperature does not start to drop) within a minute or two:

- Pull over, stop and park the vehicle as soon as it is safe to do so.
- Press the accelerator pedal to increase engine speed to about twice as fast as normal idle speed. Bring the idle speed back to normal after two or three minutes.

If the warning light does not go off (or engine coolant temperature does not start to drop), turn off the engine and get out of the vehicle, then proceed as described below:

CAUTION: To help avoid being burned:

- Do not open the hood if you see or hear steam or coolant escaping from the engine compartment. Wait until no steam or coolant can be seen or heard before opening the hood.
- Do not remove the radiator cap or coolant recovery tank cap if the coolant in the recovery tank is boiling. Also do not remove the radiator cap while the engine and radiator are still hot. Scalding fluid and steam can be blown out under pressure if either cap is taken off too soon.

If no steam or coolant can be seen or heard, raise the engine hood. If the coolant is boiling, wait until it stops before proceeding. Look at the see-through recovery tank. The coolant level should be at or above the "FULL COLD" mark on the recovery tank.

Make sure the fan belts are not broken, or off the pulleys, and that the fan turns when the engine is started.

If the coolant level in the recovery tank is low, look for leaks at the radiator hoses and connections, heater hoses and connections, radiator, and water pump. If you find major leaks, or spot other problems that may have caused the engine to overheat, do not run the engine until these problems have been corrected. If you do not find a leak or other problem, carefully add coolant to the recovery tank. (Coolant is a mixture of ethylene glycol antifreeze and water; see "Engine Cooling System" in Section 5 for the proper antifreeze and mixture.)

CAUTION: Under some conditions, the ethylene glycol in engine coolant is combustible. To help avoid being burned, do not spill antifreeze or coolant on the exhaust system or hot engine parts.

If the coolant level in the recovery tank is at the correct level but there is still an indication on the instrument panel of an overheat condition:

- **YOU MUST LET ENGINE COOL FIRST.** You may then add coolant directly to the radiator. Refer to "Adding Coolant" under "Engine Cooling System" in Section 5. Follow steps 1 through 3 for the correct way to remove the radiator cap and add coolant.

Once the Engine Coolant Temperature light has gone out (or the Engine Coolant Temperature gage no longer signals an overheat condition), you can resume driving at reduced speed. Return to normal driving after about ten minutes if the light does not come back on (or the gage pointer does not again show an overheat condition).

If no cause for the overheat condition was found, see a qualified service technician.

The LL4 diesel engine (Engine Code - J) has a deaeration tank instead of a coolant recovery tank. The deaeration tank should be kept approximately 1/2 full of a 56/44 mixture of water and ethylene glycol antifreeze (meeting GM Specification 1825-M). There is no radiator cap; to add coolant to the system a pressure cap is included on the deaeration tank. Follow all the cautions that apply to a system equipped with a coolant recovery tank.

NOTICE: The deaeration pressure cap, a 62 kPa (9 psi) must be used and installed tightly, otherwise coolant may be lost and damage to the engine may result from overheating. The cap should be checked periodically for proper operation.

JACKING

CAUTION: To help avoid personal injury:

- Follow all jacking and stowage instructions.
- Use jack only for lifting this vehicle during wheel change.
- Never get beneath the vehicle, start or run engine while vehicle is supported by jack.
- Always securely restow spare tire (or flat tire) and all jacking equipment.


JACKING INSTRUCTIONS

Jack and tools are stored with the spare tire behind seat or secured in corner of panel.


Whenever a wheel is changed, always remove any corrosion that may be present on inside of wheel and wheel mounting surface on vehicle.

1. Park on level surface and set parking brake firmly.
2. Set automatic transmission in "PARK" or manual transmission in "REVERSE."
3. Turn on the hazard warning flasher.
4. Remove jacking tools and spare tire from stowage areas.
5. Block front and rear of wheel diagonally opposite jack position.
6. Loosen but do not remove, wheel nuts by turning wrench counterclockwise. (If equipped with chrome capped wheel nuts, nuts may be damaged if wheel nut wrench is not fully seated on nut).
7. Locate jack beneath vehicle as shown (base must sit flat).

8. Turn jack handle clockwise with a slow motion to raise vehicle so an inflated tire will clear surface. Remove nuts and wheel.
9. Install wheel and replace wheel nuts with cone shaped end toward wheel then slightly tighten each nut. Wheel must be seated on hub.
10. Lower vehicle by turning jack handle counterclockwise, then fully tighten wheel nuts in a criss cross sequence by turning wrench clockwise.
11. As soon as possible, tighten wheel nuts to specifications shown in this section.

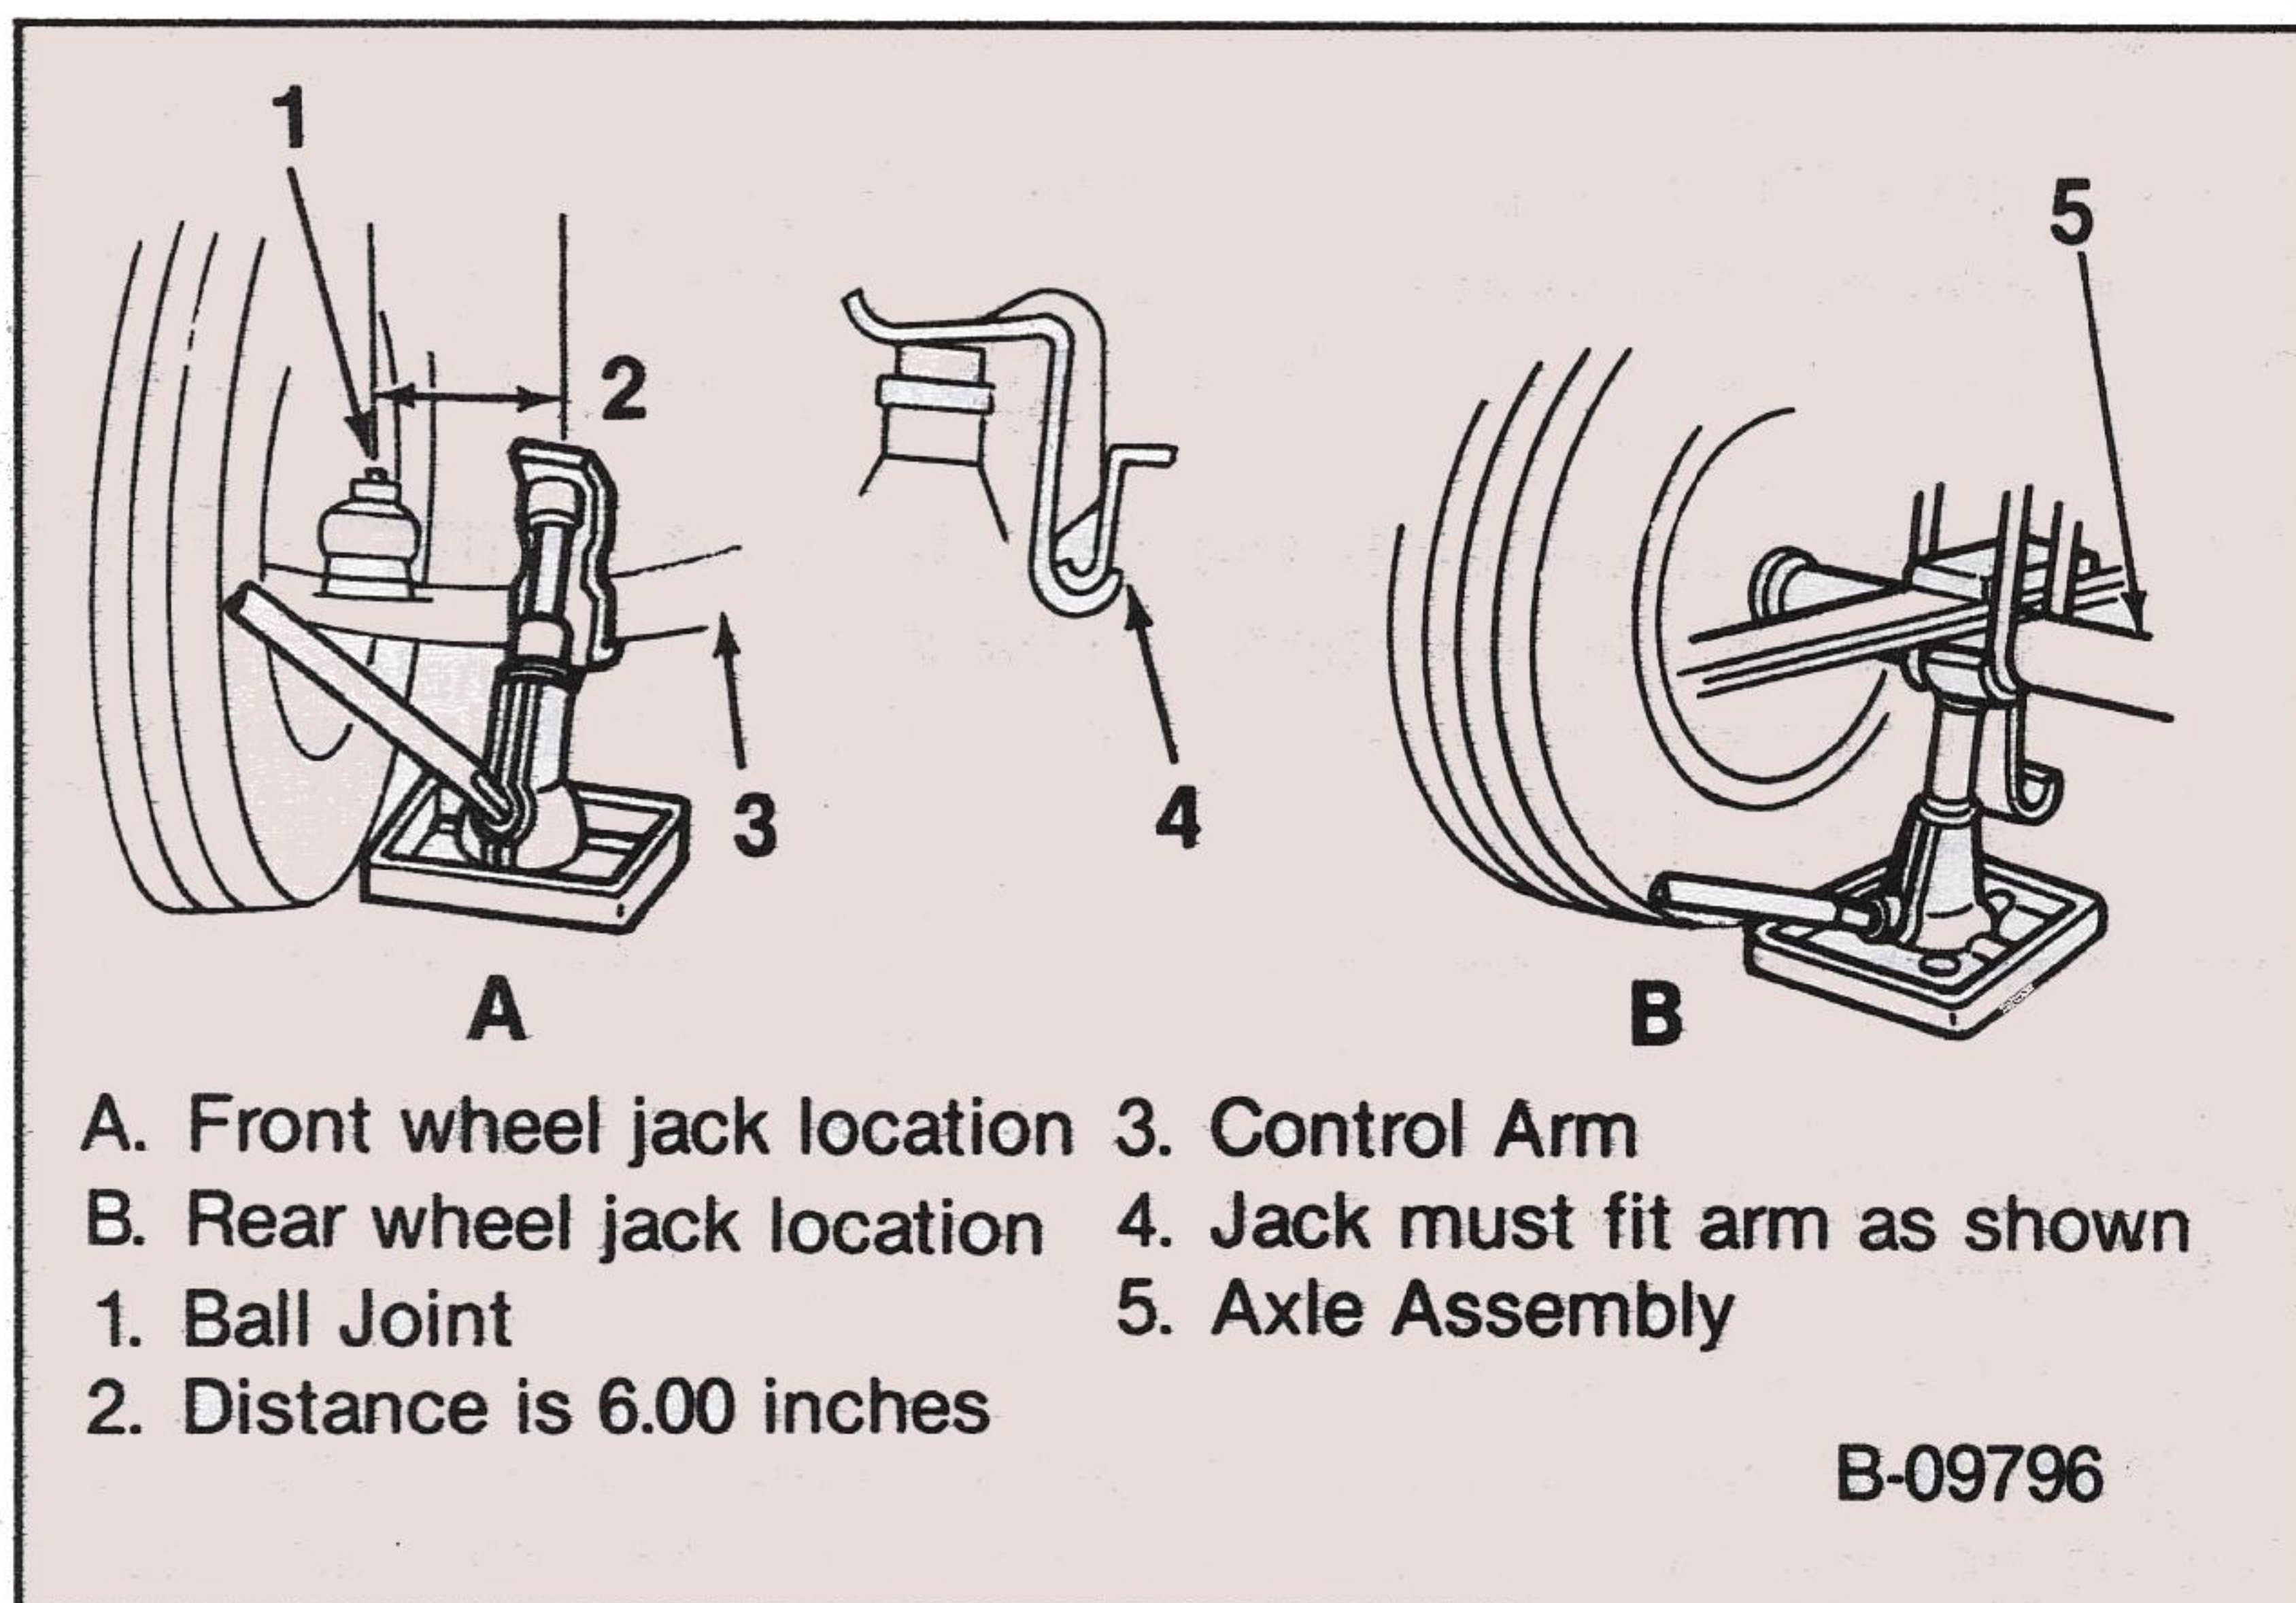

WHEEL NUT TORQUE

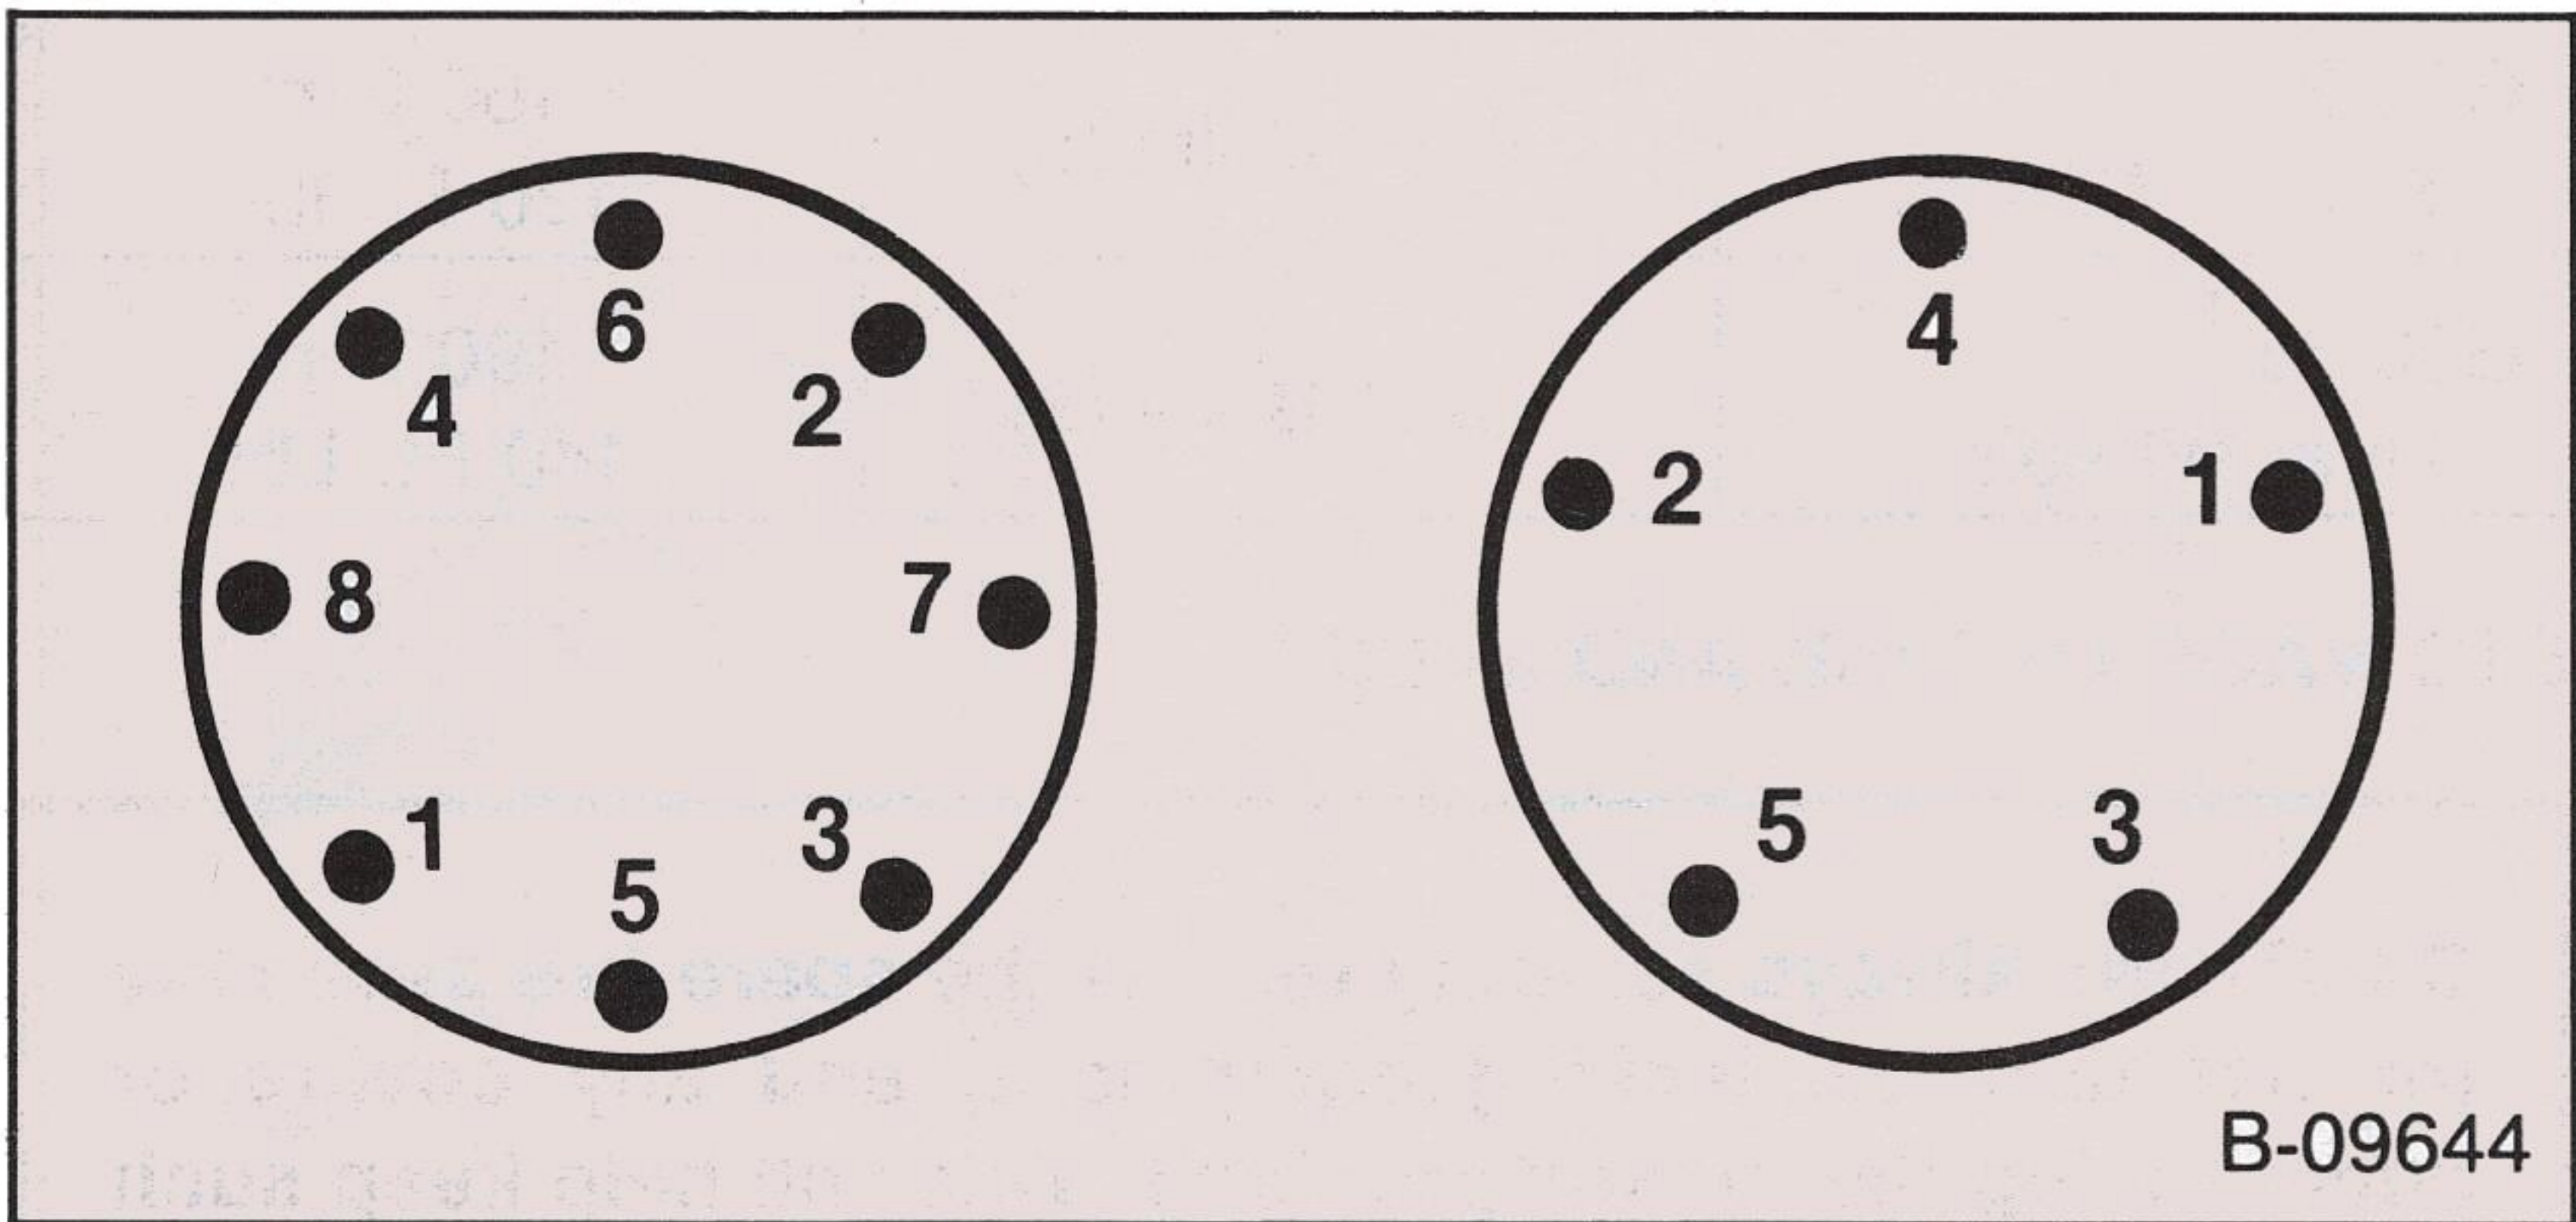

CAUTION: Never use oil or grease on studs or nuts. For both single and dual wheels, snug all wheel nuts and then tighten to the specified torque in the numerical sequence shown. Improperly tightened wheel nuts could eventually allow the wheel to come off while the vehicle is moving, possibly causing loss of control, personal injury and property damage.

As soon as possible after installing any wheel, have a technician tighten wheel nuts with a torque wrench to the torque specified in the table below. In addition, for trucks with dual wheels, when the truck, wheel or fasteners are new, also have the torque set at the first 100, 1,000, and 6,000 miles (160, 1 600, and 9 600 kilometers). This is necessary because the clamping system used on this type of wheel must seat before the fasteners will hold a uniform clamp load and remain fully tightened.





(See the “Replacement Fasteners” Caution in Section 5 regarding the danger of mixing metric and customary fasteners. Also see the “Inspection and Rotation” Caution under “Tires” in the same section regarding the importance of obtaining good metal-to-metal contact.)

Series	Description	Torque
GL10-25	1/2" Bolts (5)	140 N·m 100 Ft. Lbs.
G30-35 Single Wheels	9/16" Bolts (5)	160 N·m 120 Ft. lbs.
G30-35 Dual Wheels	9/16" Bolts (8)	190 N·m 140 Ft. Lbs.

STOWAGE OF TIRE AND JACK

CAUTION: Always securely restow the spare tire assembly (or flat tire), all jacking equipment, and any covers or doors, using the means provided. This will help keep such things from being thrown about and injuring people during a collision or sudden maneuver.

STOWAGE INSTRUCTIONS

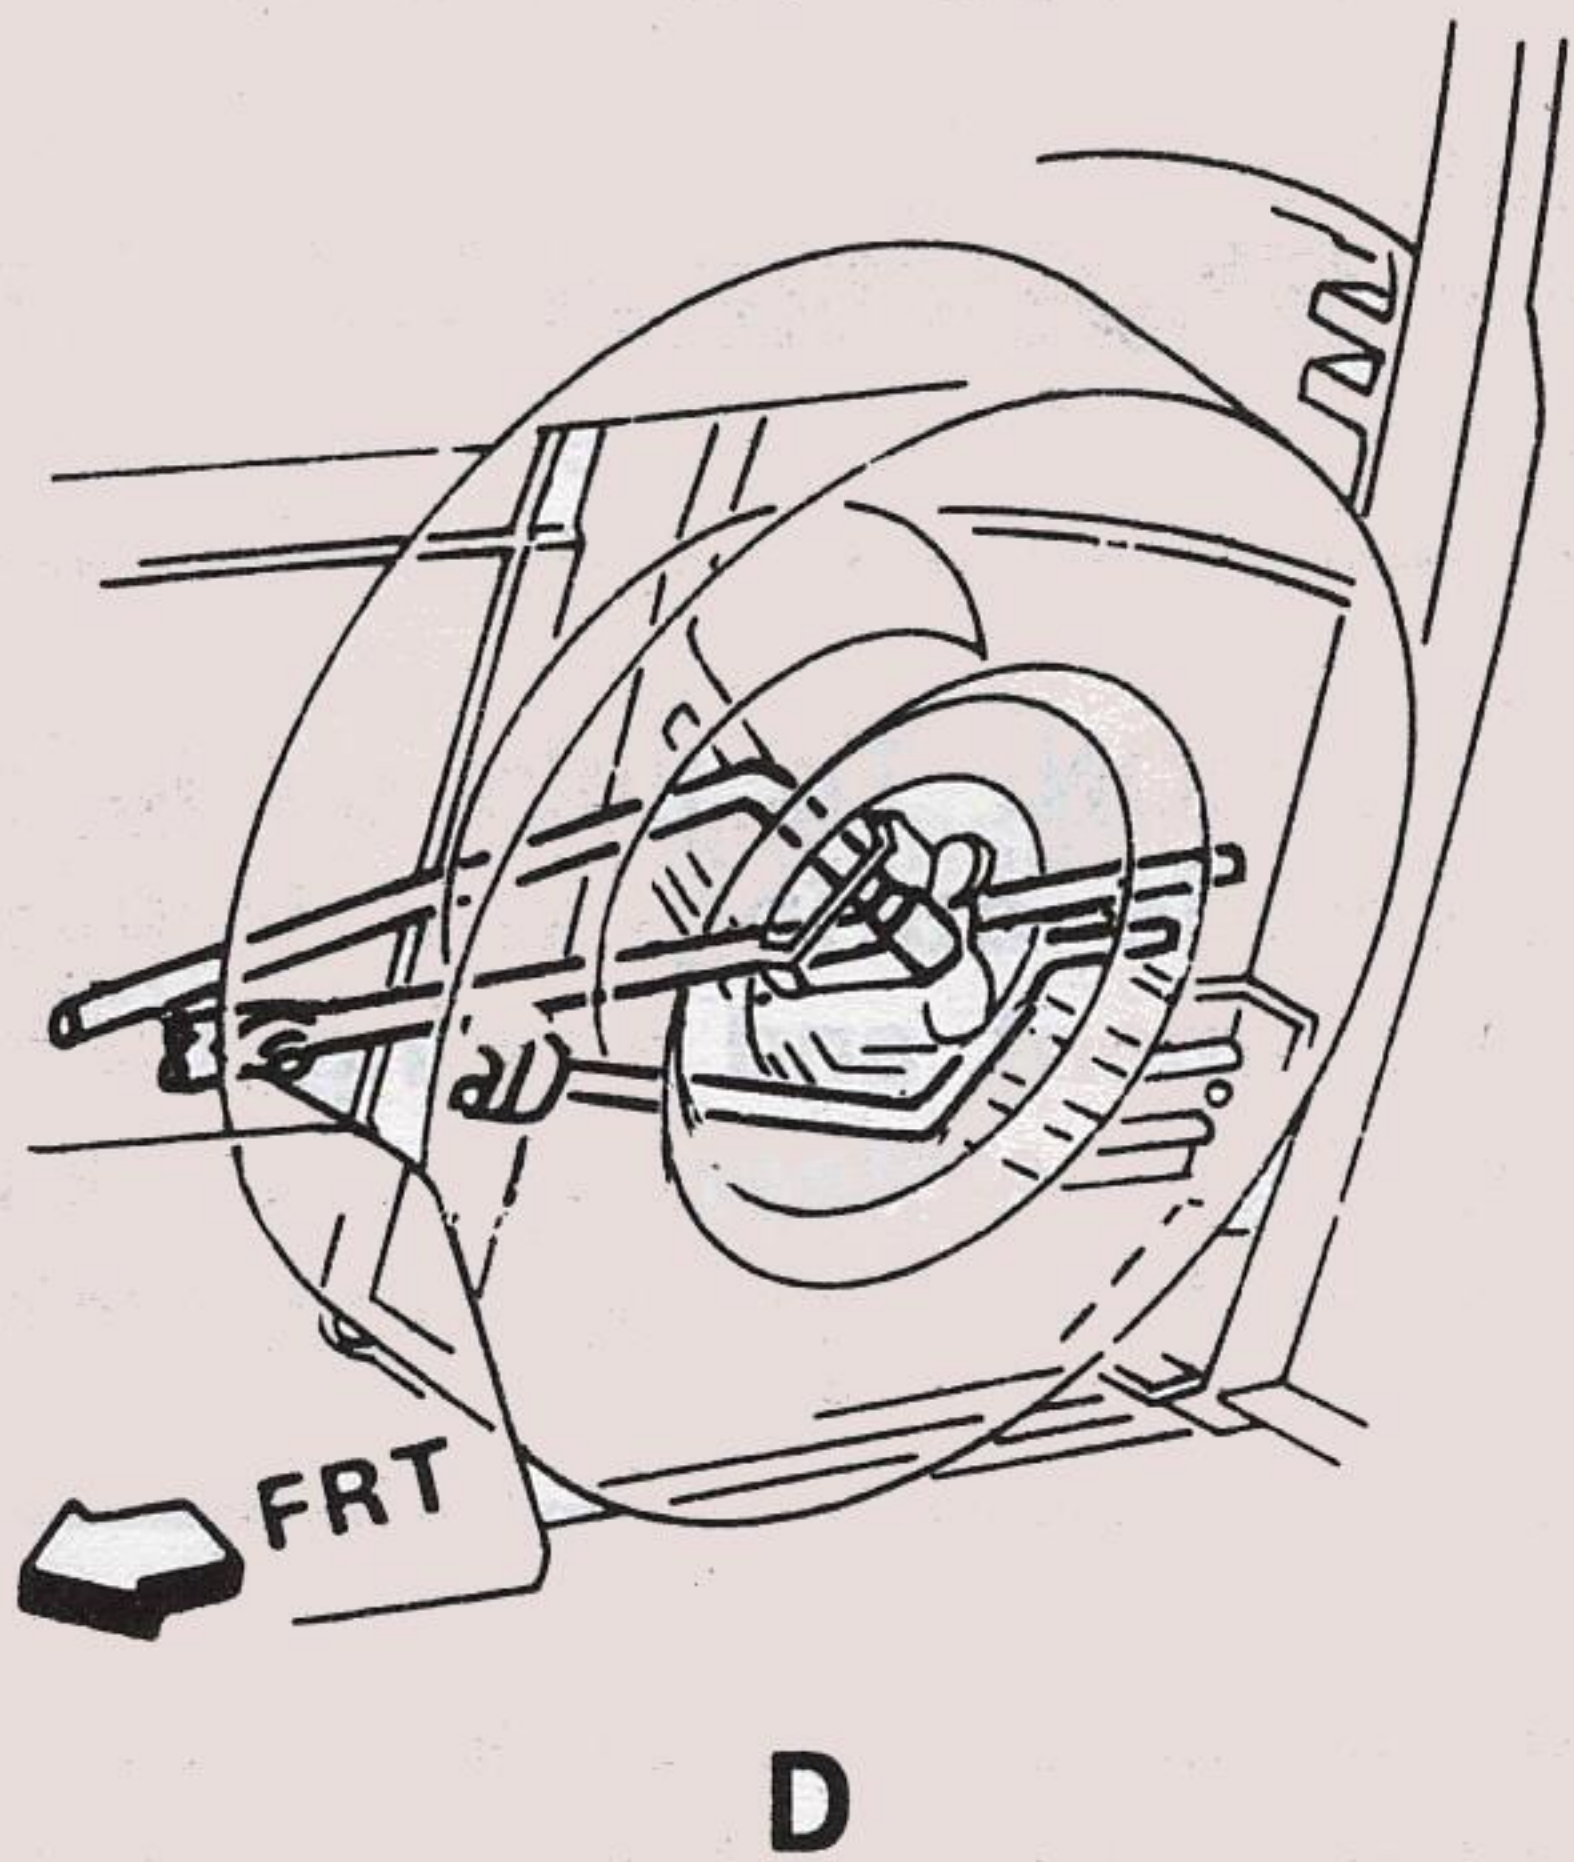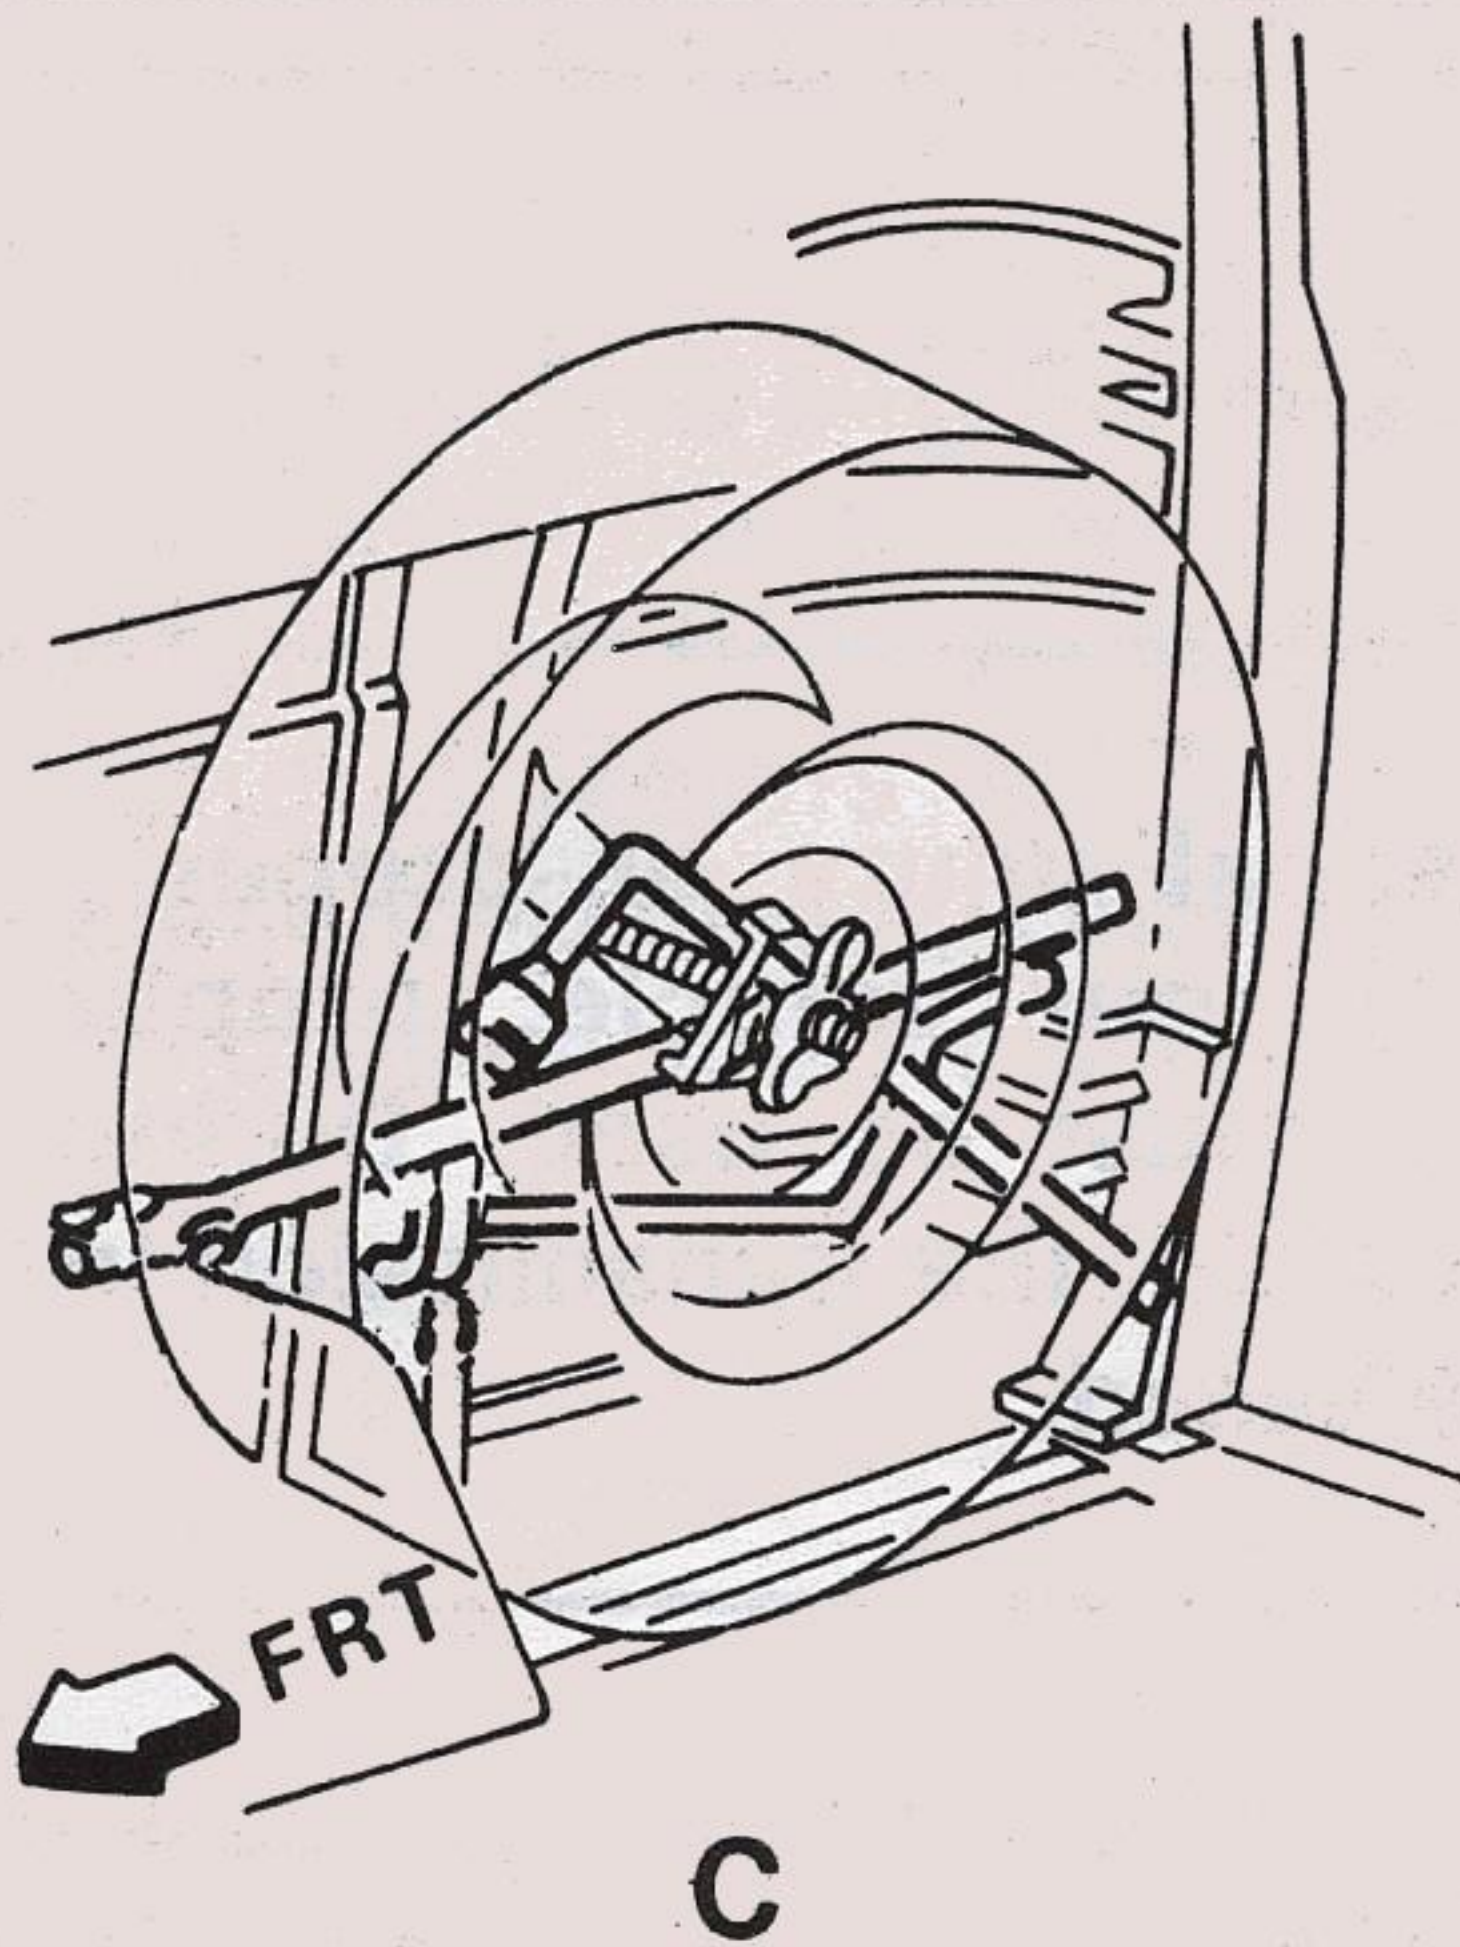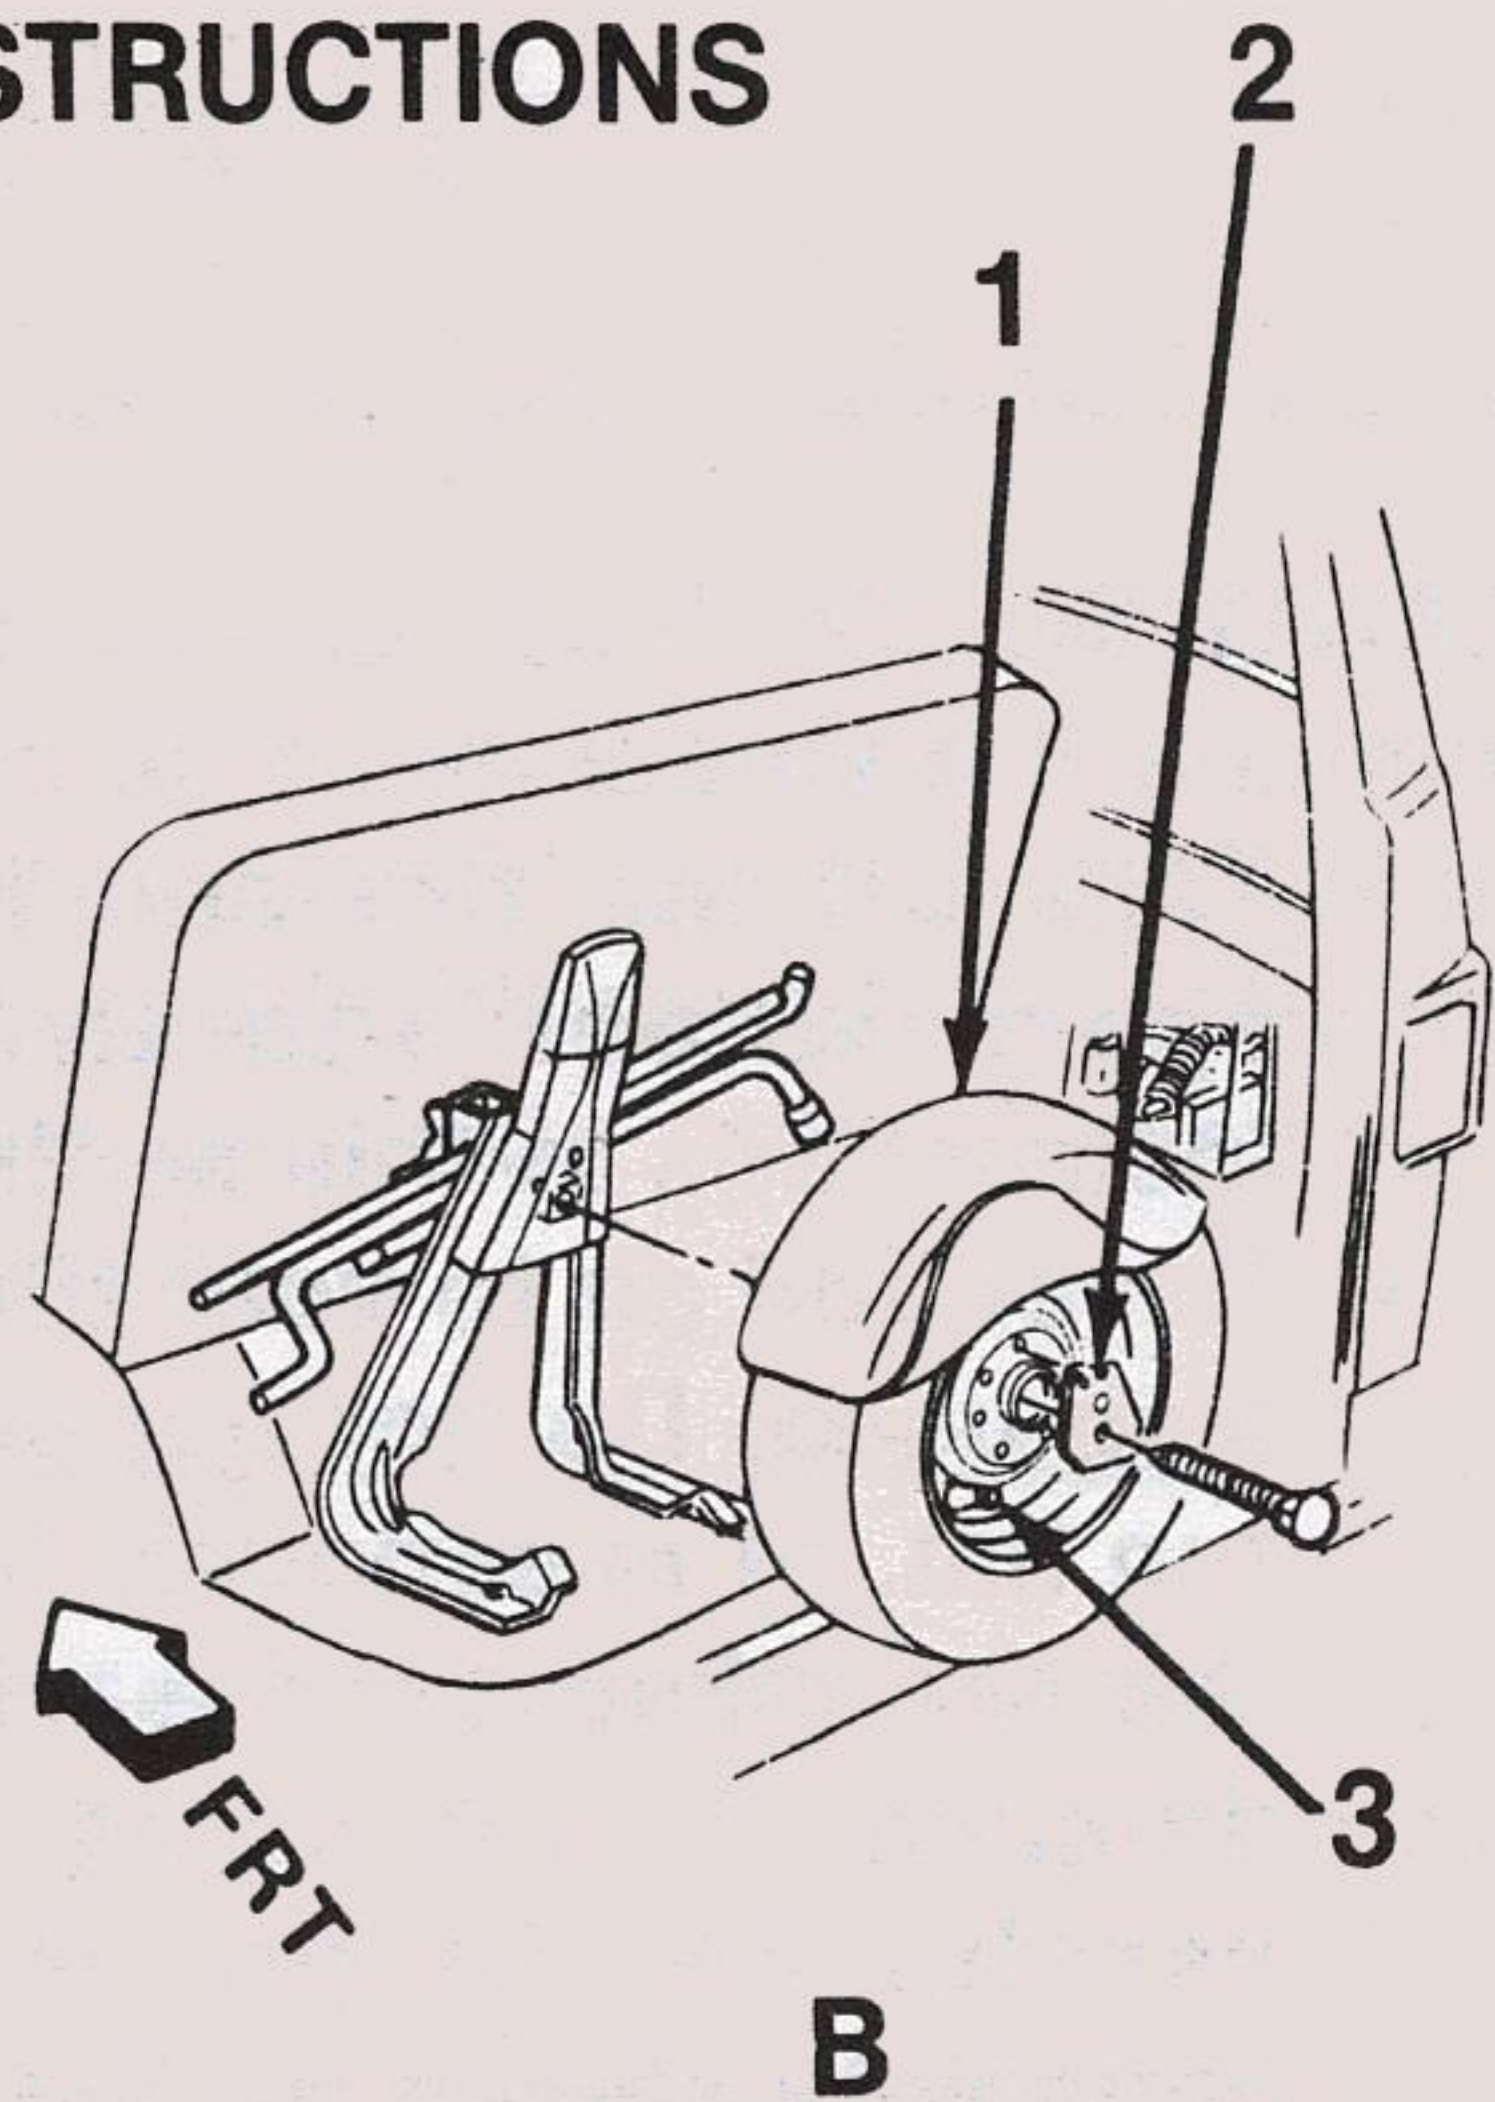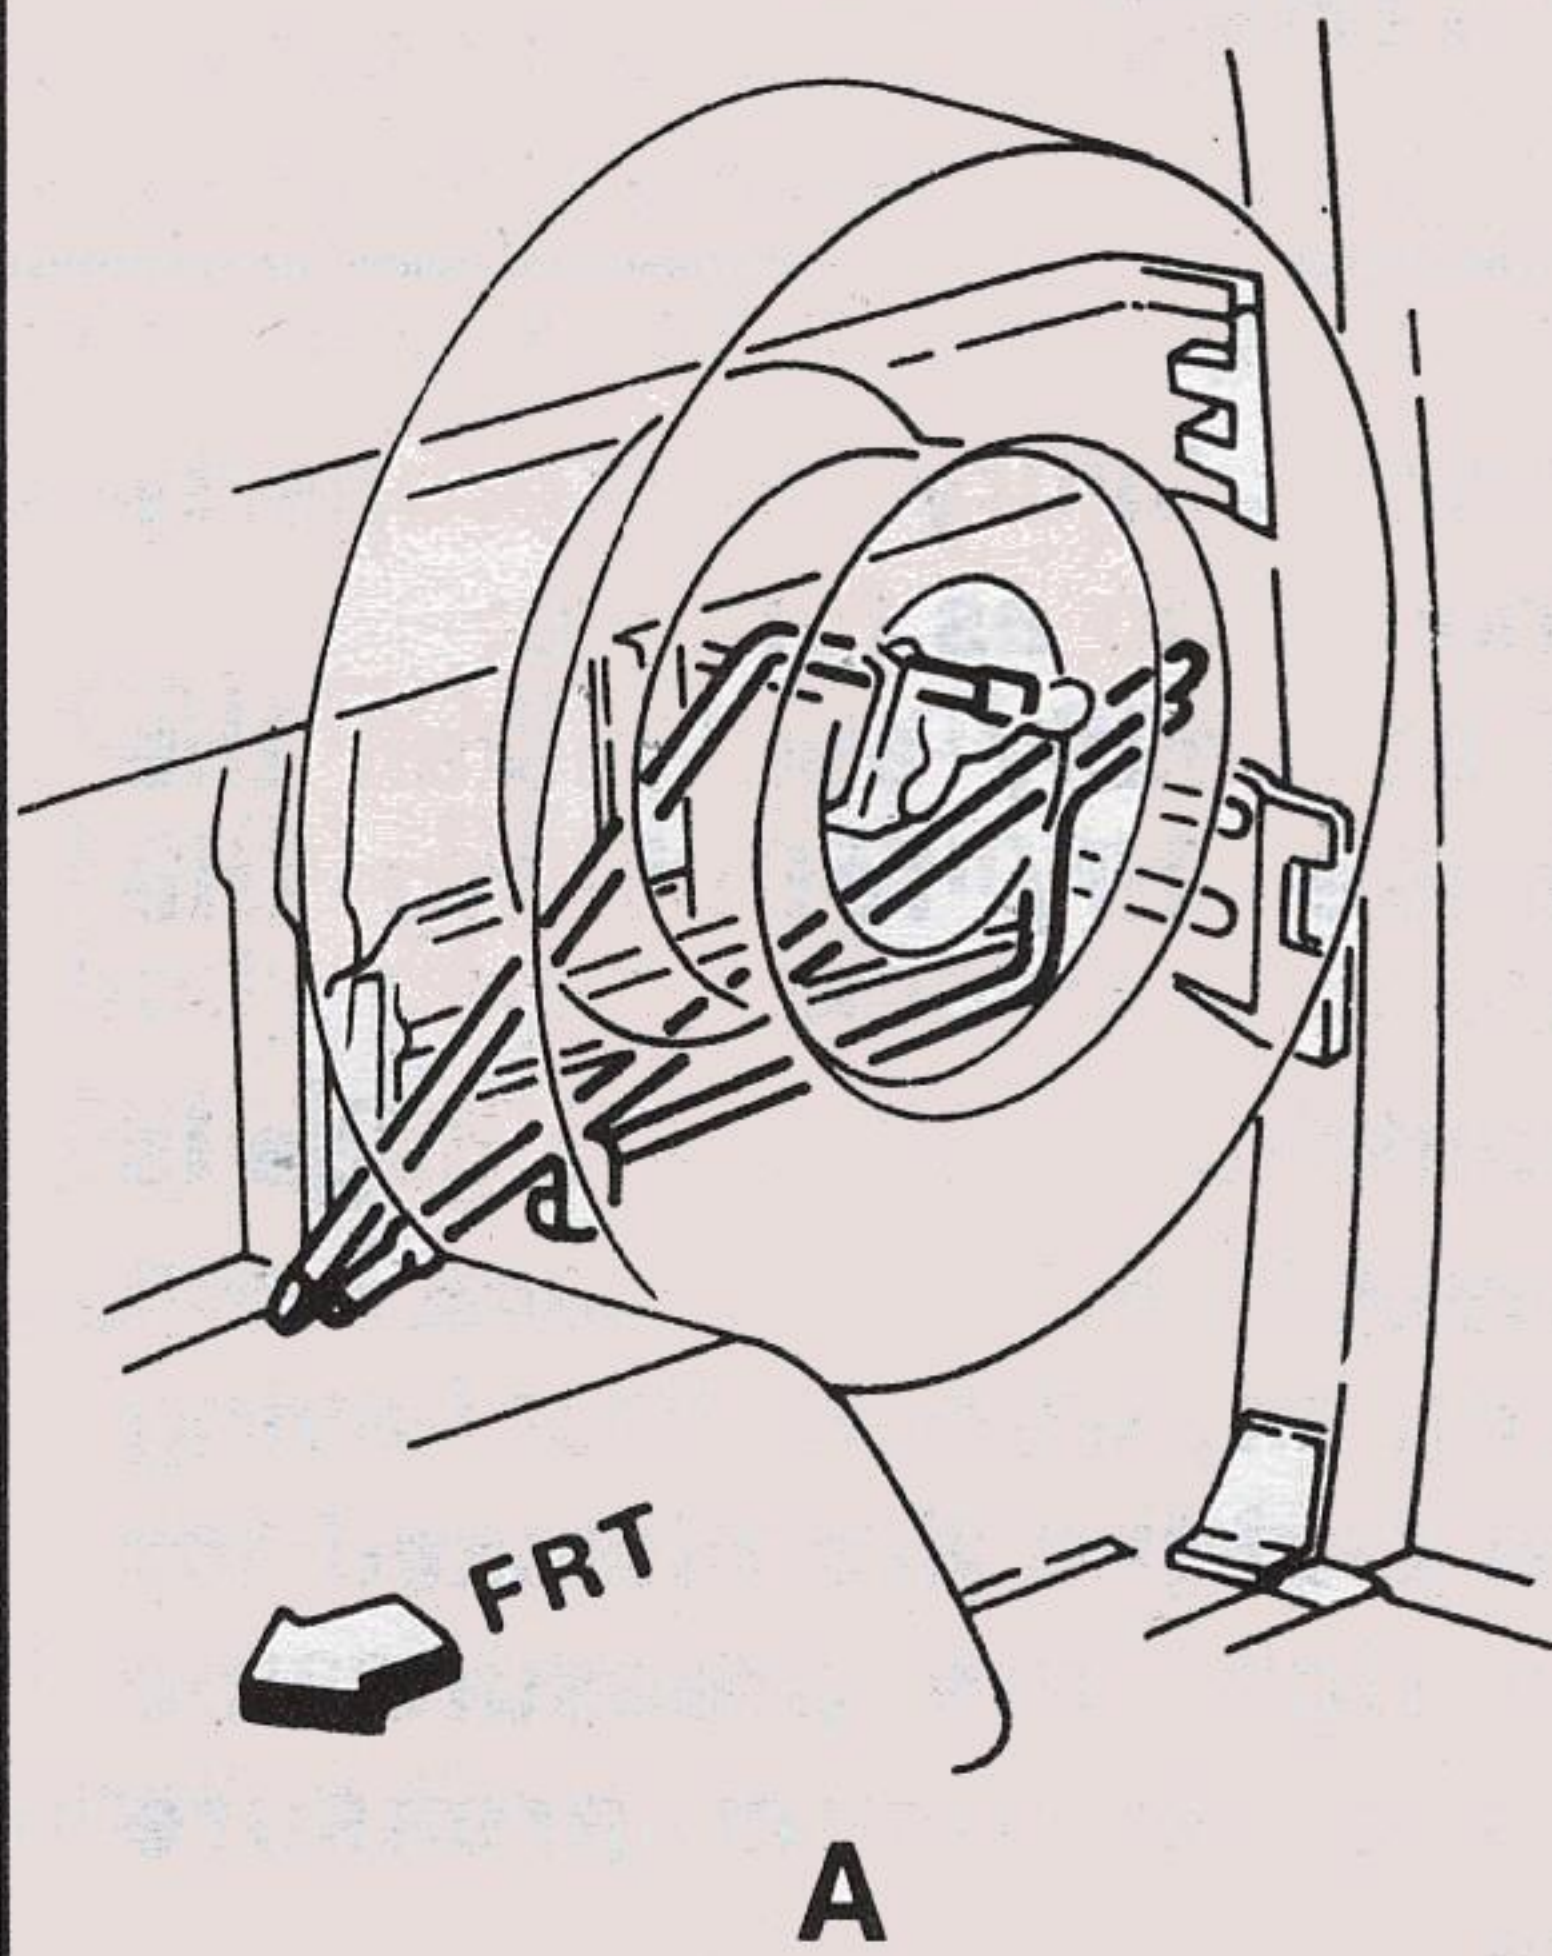

- A. 110" Wheel Base
- B. G-30/35 With Third Seat
- C. 125" Wheel Base Without Interior Trim
- D. 125" Wheel Base With Interior Trim
- 1. Spare Tire Cover
- 2. Retainer (insert tab in hole)
- 3. Valve Rearward

B-09795

DAMAGED TIRES

CAUTION: To help avoid personal injury and property damage if a wheel must be changed, do as follows:

- Take off the tire and rim assembly and install the spare wheel and tire assembly following the instructions in this section.
- Never add air to your tires unless an accurate gage is also used. Do not put air back in a tire that has been run flat, or is seriously low on air, without first having the tire taken off the wheel and the tire checked for damage. In choosing the right tire pressure, be careful not to go past the maximum pressure capability shown on the tire.

EMERGENCY (WRECKER) TOWING

CAUTION: To help avoid personal injury or property damage during any towing of your vehicle, proper equipment and towing methods must be used. During towing the steering must be unlocked, the transmission in neutral, and the parking brake released.

If towing is necessary, contact any GM dealer or a professional tow truck service. Any GM dealer has detailed towing instructions. State (provincial in Canada) and local laws which apply to vehicles in tow must be followed.

Do not tow your vehicle on all four wheels.

FREEING VEHICLE FROM SAND, MUD, SNOW OR ICE

If your vehicle gets stuck in sand, mud, snow or ice, shift the transmission from a forward range to reverse in a repeat pattern. (On manual transmission models, shift the transmission from First or

Second to Reverse). Apply a light pressure to the accelerator pedal while the transmission is in gear. Remove your foot from the accelerator while shifting. Do not race the engine. For best traction, avoid spinning the wheels. Incorrect rocking of your vehicle while it is stuck may result in damage to vehicle components.

CAUTION: Do not spin the wheels faster than 35 mph (55 km/h). Personal injury and damage (including tire, vehicle body parts, transmission and/or rear axle failure) may result from excessive wheel spinning.

If the vehicle remains stuck after several rocking attempts, seek other assistance. Also see the Notice under “Automatic Transmissions” in Section 2.

EXTENDED VEHICLE STORAGE

If you plan to store your vehicle over an extended period of time, certain steps should be taken to give it maximum protection. It is recommended that you write the Customer Assistance Department, Chevrolet Motor Division, Warren, Michigan 48090, (in Canada, write to General Motors of Canada Limited, Customer Services Department, Oshawa, Ontario L1J5Z6) for detailed instructions on how to prepare your vehicle for storage.

For continuing satisfaction keep your vehicle all GM. General Motors parts are identified by one of these trademarks.



SECTION 4

APPEARANCE CARE

CONTENTS

Care And Cleaning Of The Interior	4- 2
Care And Cleaning Of The Exterior.....	4- 6
Corrosion Protection.....	4- 7
Underbody Maintenance.....	4- 8
Notice To New Vehicle Owners Regarding Chemical Paint Spotting	4- 8
Appearance Care And Maintenance Materials	4-10

CAUTION: Follow the manufacturer's advice whenever cleaning agents or other chemicals are used, inside or outside the vehicle. Some cleaners may be poisonous or flammable, and improper use may cause personal injury or damage. When cleaning the inside or outside of the vehicle, do not use volatile cleaning solvents such as: acetone, lacquer thinners, enamel reducers, nail polish removers; or such cleaning materials as laundry soaps, bleaches or reducing agents, except as noted in the fabric cleaning advice on stain removal which follows. Never use carbon tetrachloride, gasoline, benzene, or naphtha for any cleaning purpose.

Open all vehicle doors for ventilation when any cleaning agents or other chemicals are used in the interior. Overexposure to some vapors may result in a health problem which is more likely to occur in small, unventilated spaces.

NOTICE: To avoid possible permanent discoloration of light colored seats, **DO NOT** let materials with non-fast colors come in contact with seat trim materials until these materials are totally dry. This includes certain types of casual clothing, such as colored denims, corduroys, leathers and suedes; also decorative paper, etc.

CARE AND CLEANING OF THE INTERIOR

With the use of modern trim materials, it is **VERY IMPORTANT** that you use proper cleaning techniques and cleaners. Failing to do this on the first cleaning may result in water spots, spot rings, or setting of stains of soilage, all of which are more difficult to remove in a second cleaning.

Dust and loose dirt that collect on interior fabrics should be removed often with a vacuum cleaner or soft bristle brush. Wipe vinyl or leather trim regularly with a clean damp cloth. Normal trim soilage, spots, or stains can be cleaned with these GM cleaners:

DESCRIPTION	PART NO.
GM Spot Lifter	
8 oz. (0.237 L) Solvent Type	1051398
GM Multi-Purpose Powdered Cleaner	
6 lb. (2.72 kg) Foam Type	1050429

The above products are excellent cleaners when used properly. They are available through your GM dealer.

REMEMBER THESE BASIC STEPS BEFORE CLEANING:

- 1. Remove stains as quickly as possible before they become "set."
- 2. Use a clean cloth or sponge, and change to a clean area often. A soft brush may be used if stains persist.
- 3. Use solvent-type cleaners only in a well ventilated area; also, do not saturate the stained area.
- 4. If a ring forms after spot cleaning, clean the entire area immediately.
- 5. Follow specific instructions on cleaner labels.

CLEANING GENERAL SOILAGE OR WATER SPOTS FROM FABRIC TYPE TRIM (INCLUDING FLEECE AND PIGSKIN SUEDE LEATHER) WITH FOAM-TYPE CLEANER

GM Multi-Purpose Powdered Cleaner is excellent for this type of cleaning and for cleaning panel sections where small cleaning rings may be left from spot cleaning.

- Vacuum the area thoroughly to remove any loose dirt.
- Always clean a whole trim panel or section. Mask surrounding trim along stitch or welt lines.
- Mix Multi-Purpose Powdered Cleaner in strict accordance with the directions on the container label. Mix in proportion for smaller quantities.
- Use suds on a clean sponge. Do not brush wet suede. Do not saturate the material or rub it harshly. Immediately after cleaning, remove suds with a sponge and rinse with a clean wet sponge. Wipe off remaining residue with a slightly damp absorbent towel or cloth.
- Important — Immediately after wiping, force-dry the fabric with an air hose. A heat dryer or heat lamp may be used. Use caution with a heat dryer or lamp to help prevent damage.
- When trim materials with a sheen or luster finish are dry, wipe the fabric lightly with a soft, dry, clean cloth to restore its sheen or luster. For suede, raise nap with dry scrub brush and vacuum to remove any final traces of residue.

SPOT CLEANING FABRIC TYPE TRIM (EXCEPT PIGSKIN SUEDE LEATHER) WITH SOLVENT TYPE CLEANER

Before trying to remove a spot or stain from fabric, try to find out the type and age of the spot or stain. Some spots or stains can be removed with water or a mild soap solution (see "Removal of Specific Stains"). Spots or stains should always be removed as soon as possible.

Some types of stains or soilage, such as lipstick, inks and grease, are very difficult (sometimes impossible) to completely remove. When cleaning this type of stain or soilage, be sure not to enlarge the soiled area.

GM Fabric Cleaner (Solvent Type) is excellent for spot cleaning grease, oil, or fat stains.

NOTICE: Solvent type cleaners must not be used on pigskin suede leather. Damage to the material may result from such use.

- Gently scrape excess stain from the trim material with a clean, dull knife or scraper. Use very little cleaner, light pressure, and clean cloths (preferably cheesecloth). Cleaning should start at the outside of the stain “feathering” towards the center. Keep changing to a clean section of cloth.
- When you clean a stain from fabric, immediately dry the area with an air hose, heat dryer, or heat lamp to help prevent a cleaning ring. (Use caution with heat dryer or lamp to help prevent fabric damage.
- If a ring forms, immediately repeat the cleaning operation over a slightly larger area with emphasis on “feathering” towards its center. If a ring still remains, mask off surrounding trim sections and clean the entire soiled area with GM Multi-Purpose Powdered Cleaner (as described under “Cleaning General Soilage or Water Spots from Fabric Type Trim with Foam-Type Cleaner”).

REMOVAL OF SPECIFIC STAINS (EXCEPT FROM PIGSKIN SUEDE LEATHER)

Grease or Oil Stains—Includes grease, oil, butter, margarine, shoe polish, coffee with cream, chewing gum, cosmetic creams, vegetable oils, wax crayon, tar and asphalts.

- Carefully scrape off excess stain; then use GM Fabric Cleaner (Solvent-Type) as previously described.
- Shoe polish, wax crayons, tar and asphalts will stain if left on trim; they should be removed as soon as possible. Use care as cleaner will dissolve them and may cause them to “bleed.”

Non-Greasy Stains—Includes catsup, coffee (black), egg, fruit, fruit juice, milk, soft drinks, wine, vomit and blood.

- Carefully scrape off excess stain; then sponge the stain with cool water.
- If a stain remains, use Multi-Purpose Powdered Cleaner (Foam Type) as previously described.
- If an odor lingers after cleaning vomit or urine, treat the area with a water-baking soda solution: 5 milliliters (1 teaspoon) of baking soda to 250 milliliters (1 cup) of luke warm water.

- Finally, if needed, clean lightly with Fabric Cleaner (Solvent Type).

Combination Stains—Includes candy, ice cream, mayonnaise, chili sauce and unknown stains.

- Carefully scrape off excess stain; then clean with cool water and allow to dry.
- If a stain remains, clean it with Fabric Cleaner (Solvent Type).

REMOVAL OF SPECIFIC STAINS FROM PIGSKIN SUEDE LEATHER

For the removal of all grease or oil based stains, as well as all general stains on pigskin suede leather, GM recommends the use of a qualified professional cleaner who has been trained to care for suede leather.

CLEANING VINYL OR LEATHER (EXCEPT PIGSKIN SUEDE LEATHER) TRIM

Ordinary soilage can be removed from vinyl or leather with warm water and mild soap such as saddle soap or oil soap, or an equivalent.

- Apply a small amount of soap solution and let it soak for a few minutes to loosen dirt; then, rub briskly with a clean, damp cloth to remove dirt and traces of soap. This may be done several times, if needed.
- Soilage such as tars, asphalts, shoe polish, etc. will stain if left on trim. They should be wiped off as quickly as possible and the area cleaned with a clean cloth dampened with GM Vinyl/Leather Cleaner (Solvent Type).

SEAT BELT CARE

- Keep belts clean and dry.
- Clean lap belts only with mild soap and lukewarm water.
- Do not bleach or dye belts since this may severely weaken them.

GLASS SURFACES

Glass surfaces should be cleaned on a regular basis. Use of GM Glass Cleaner or a liquid household glass cleaner will remove normal tobacco smoke and dust films sometimes caused by ingredients used in vinyls and interior plastics.

Never use abrasive cleaners on any vehicle glass, as they may cause scratches. If abrasive cleaners are used on the inside of the rear window, any electric defogger element may be damaged. Avoid placing decals on the inside rear window, since they may have to be

scraped off later. Any temporary license, etc. should not be attached across the defogger grid.

CLEANING THE OUTSIDE OF WINDSHIELD

If your windshield is not clear after using the windshield washer, or if the wiper blade chatters when running, wax or other material may be on the blade or windshield.

Clean the outside of the windshield with Bon-Ami® , a non abrasive cleaner. Your windshield is clean if beads do not form when rinsing with water.

Clean the blade by wiping with a cloth soaked in a solution of one-half water and one-half GM Optikleen. A solution of one-half water and one-half methanol alcohol may also be used. Then rinse the blade with water.

CLEANING GLASS ROOF PANELS

Never use abrasive cleaners on any glass Vista-Vent panels as such cleaners may cause scratches. Also, if you use such cleaners on the inside surface, the tinted coating may be damaged. Avoid placing decals on the inside surface, since they may later have to be scraped off.

CARE AND CLEANING OF EXTERIOR

EXTERIOR FINISH

The paint finish on your vehicle provides beauty, depth of color, gloss retention and durability.

Washing Your Vehicle

The best way to preserve your vehicle's finish is to keep it clean by frequent washings. Wash the vehicle in lukewarm or cold water.

Do not use hot water or wash your vehicle in the direct rays of the sun. Do not use strong soap or chemical detergents. All cleaning agents should be flushed promptly from the surface and not allowed to dry on the finish.

G.M. vehicles are designed to operate under normal environmental conditions to withstand the natural elements. However, unusual conditions, such as high pressure car washes, may cause water to enter inside the vehicle.

Polishing is recommended to remove built-up residue and eliminate any "weathered" appearance.

Your GM dealer offers several polishes and cleaners which have proven value in maintaining original finish appearance and durability.

Protecting Exterior Bright Metal Parts

Bright metal parts should be cleaned regularly to keep their luster. Washing with water is all that is usually needed. However, you may use GM Chrome Polish on chrome or stainless steel trim, if necessary.

Use special care with aluminum trim. To avoid damaging protective trim, never use auto or chrome polish, steam or caustic soap to clean aluminum. A coating of wax, rubbed to a high polish, is recommended for all bright metal parts.

Cleaning Aluminum Wheels

Preserve the original appearance of aluminum wheels (if your vehicle has them) by keeping them clean and free from build-up of road dirt and/or road salt. Regular cleaning followed by a coat of wax is recommended. Do not use abrasive cleaners, as they could damage the protective coating.

CLEANING WHITE SIDEWALL TIRES

Use GM White Sidewall Tire Cleaner or a tire cleaner which will not harm aluminum wheel trim. A stiff brush may be used with the cleaner.

WEATHER STRIP LUBRICATION

Silicone grease application will lengthen weather strip life, help sealing and assist in eliminating squeaks. At least every six months, all weather strips should be lubricated with a silicone-grease lubricant Part No. 1052863, or equivalent. A thin film of silicone grease lubricant should be applied using a clean cloth.

CORROSION PROTECTION

Your vehicle has been designed and built to resist corrosion. Special materials and protective finishes were used on most parts of your vehicle when it was built to help maintain good looks, strength and reliable operation. However, some parts which normally are not visible (such as certain parts under the vehicle and under the hood) are such that surface rust will not affect their reliability. So corrosion protection is not needed or used on these parts.

Sheet Metal Damage

If your vehicle is damaged and requires sheet metal repair or replacement, make sure the body repair shop applies anti-corrosion material to the parts repaired or replaced so that corrosion protection is restored. (Also see "Finish Damage" which follows.)

Foreign Material Deposits

Calcium chloride and other salts, ice melting agents, road oil and tar, tree sap, bird droppings, chemicals from industrial chimneys, and other foreign matter may damage vehicle finishes if left on painted surfaces.

Prompt washing may not completely remove all of these deposits. Other cleaners may be needed. When using chemical cleaners, be sure they are safe for use on painted surfaces.

Finish Damage

Any stone chips, fractures or deep scratches in the finish should be repaired promptly. Bare metal will corrode quickly and may develop into major repair expense.

Minor chips and scratches can be repaired with touch-up materials available from your GM dealer or other service outlets. Larger areas of finish damage can be corrected in your dealers body and paint shop.

UNDERBODY MAINTENANCE

Corrosive materials used for ice and snow removal and dust control can collect on the underbody. If these materials are not removed, accelerated corrosion (rust) can occur on underbody parts such as fuel lines, frames, floor pan, and exhaust system even though they have been provided with corrosion protection.

At least every spring, flush these materials from the underbody with plain water. Take care to clean well any areas where mud and other debris can collect. Sediment packed in closed areas of the frame should be loosened before being flushed. If desired, your GM dealer can do this service for you.

NOTICE TO NEW VEHICLE OWNERS REGARDING CHEMICAL PAINT SPOTTING

GM believes that certain weather and atmospheric conditions may create a chemical fallout whereby certain airborne pollutants fall upon and attack vehicle paints. Occurrences have taken place primarily in the northeastern seaboard area. The paint damage takes two forms: blotchy, ringlet-shaped discolorations, and small irregular dark spots etched into the paint surface.

Paint spottings as a result of the fallout is not related to a defect in paint materials or workmanship. For this reason, claims arising from

this condition are not considered to be warranty related. Nevertheless, because GM shares the pride which our owners take in preserving and maintaining the appearance of their vehicles, GM has authorized its dealers to repair, at no charge to the owner, the surfaces of new vehicles damaged by this fallout condition within 12 months or 12,000 miles (20 000 km) of purchase, whichever comes first.

APPEARANCE CARE AND MAINTENANCE MATERIALS

PART NUMBER	SIZE	DESCRIPTION	USAGE
1051516	0.946 L (32 oz.)	Washer Solvent & Gas Line De-icer	Windshield washing system and gas line
1050017	0.946 L (32 oz.)	Power Steering Fluid	Power Steering
1052277	0.354 L (13 oz.)	Spray-A-Squeak	Weather Strips-stops squeaks metal-to-metal and metal-to-rubber contact
1050172	0.473 L (16 oz)	Tar and Road Oil Remover	Removes old waxes, polishes, tar and road oil
1050173	0.473 L (16 oz.)	Chrome Cleaner and Polish	Removes rust and corrosion on chrome and stainless steel
1050174	0.473 L (16 oz.)	White Sidewall Tire Cleaner	Cleans white and black tires
1050214	0.946 L (32 oz.)	Vinyl/Leather Cleaner	Spot and stain removal on leather or vinyl
1050244	0.473 L (16 oz.)	Fabric Cleaner	Spot and stain removal on cloth and fabric
1052627	0.354 L (12 oz.)	Heat Valve Lubrication	Free up stick heat risers - general purpose penetrant
1050427	0.680 L (23 oz.)	Glass Cleaner	Glass cleaning and spot cleaning on vinyls
1050429	2.72 kg (6 lbs.)	Multi-Purpose Powdered Cleaner	Cleans vinyl and cloth on door trim, seats, and carpet- also tires and mats

APPEARANCE CARE AND MAINTENANCE MATERIALS (CONT.)

PART NUMBER	SIZE	DESCRIPTION	USAGE
1052349	0.340 kg (12 oz.)	Lubriplate (White Grease)	Grease for hood, and door hinges and latches
1052863	0.028 kg (1 oz.)	Silicone Grease	Weatherstripping
1051398	0.237 L (8 oz.)	Spot Lifter	Spot and stain removal on cloth and fabric
1051515	0.946 L (32 oz.)	GM Optikleen	Windshield washer solvent and anti-freeze
1051855	0.946 L (32 oz.)	Dexron® II	Automatic Transmissions
1052367	0.473 L (16 oz.)	GM Engine Oil Supplement (E.O.S.)	See your Dealer for specific usage
1052753	3.785 L (1 gal.)	Permanent Type Anti-Freeze Coolant (Ethylene Glycol Base)	Year round coolant and anti-freeze
1052271	0.680 L (23 oz.)	GM Gear Lubricant	Rear Axle Lubricant
1052535	0.473 L (16 oz.)	Delco-Supreme II Brake Fluid	Brake fluid

For continuing satisfaction keep your vehicle all GM. General Motors parts are identified by one of these trademarks.



SECTION 5

SERVICE AND MAINTENANCE

CONTENTS

Owner Maintenance	5- 1
Catalytic Converter	5- 4
Heavy Duty Exhaust System	5- 5
The Computer Command Control System	5- 6
Air Cleaner — Flame Arrestor	5- 8
Engine Oil And Filter Recommendations	5- 8
Automatic Transmission Fluid Recommendations	5-19
Manual Transmission Fluid Recommendations	5-20
Engine Cooling System	5-21
Rear Axle	5-25
Power Steering System	5-26
Freedom Battery	5-27
Tires	5-29

Your GM dealer has factory trained technicians and Genuine GM Parts to service your vehicle properly. For expert advice and quality service, see your GM dealer.

OWNER MAINTENANCE

CAUTION: To help avoid personal injury, take care when doing any maintenance or making any check or repair. Some of the materials in this vehicle may also be hazardous if used, serviced, or handled improperly. Improper or incomplete service can also affect the vehicle which may in turn result in personal injury, or damage to the vehicle or its equipment. If you have any question about carrying out some service, have the work done by a skilled technician.

NOISE CONTROL SYSTEM

The following information relates to compliance with Federal noise emission standards for vehicles with a Gross Vehicle Weight Rating

(GVWR) of more than 4 536 kilograms (10,000 pounds). The Maintenance Schedule booklet provides information on maintaining the noise control system to minimize degradation of the noise emission control system during the life of your vehicle. The noise control system warranty is given in your Warranty booklet.

These standards apply only to vehicles sold in the United States.

TAMPERING WITH NOISE CONTROL SYSTEM PROHIBITED

Federal law prohibits the following acts or the causing thereof:

1. The removal or rendering inoperative by any person, other than for purposes of maintenance, repair or replacement, of any device or element of design incorporated into any new vehicle for the purpose of noise control, prior to its sale or delivery to the ultimate purchaser or while it is in use, or
2. The use of the vehicle after such device or element of design has been removed or rendered inoperative by any person.

Among those acts presumed to constitute tampering are the acts listed below.

Insulation:

- Removal of noise shields or underhood insulation.

Engine:

- Removal or rendering engine speed governor, if so equipped, inoperative so as to allow engine speed to exceed manufacturer specifications.

Fan And Drive:

- Removal of fan clutch, if so equipped, or rendering clutch inoperative.
- Removal of fan shroud, if so equipped.

Air Intake:

- Removal of air cleaner silencer.
- Reversing air cleaner cover.

Exhaust:

- Removal of muffler and/or resonator.
- Removal of exhaust pipes and exhaust pipe clamps.

DIESEL ENGINE SERVICE

NOTICE: Your diesel engine is not the same as diesel engines used in heavy trucks or farm equipment. Do not attempt any service or repair if you have any questions about performing it. Your dealer knows your vehicle best and can answer any questions you may have about service.

REPLACEMENT FASTENERS

During vehicle maintenance, any fasteners used to replace older ones must have the same measurements and strength as those removed, whether metric or customary. (The numbers on the heads of metric bolts and on the surfaces of metric nuts show their strength. Customary bolts use radial lines to show this, while most customary nuts do not have strength markings.) Fasteners taken from the vehicle should be saved for re-use in the same spot when possible. Where a fastener cannot be used again, take care to choose a replacement that matches the old one. For information and help, see your authorized dealer.

CAUTION: This vehicle has some parts dimensioned in the metric system as well as in the customary system. Some fasteners are metric and are very close in dimension to well-known customary fasteners in the inch system. Mismatched or incorrect fasteners can result in damage to the vehicle or possible personal injury.

MAINTENANCE SCHEDULE

For owner convenience, a separate booklet has been provided with your vehicle which outlines the maintenance your vehicle requires. The Maintenance Schedule booklet is supplemented by this section of the Owner's Manual.

Read this schedule for a full understanding of your vehicle's maintenance needs. If you need a replacement Maintenance Schedule, see your dealer or contact the Consumer Relations Representative, Chevrolet Central Office, Chevrolet Motor Division, Warren, Michigan 48090 (313-492-5500). (In Canada, contact the Customer Services Representative, General Motors of Canada Ltd., Oshawa, Ontario, L1J 5Z6; 416/644-6624).

FUEL CAP

The fuel cap is behind a hinged door on the left rear quarter panel.

The fuel tank filler cap has a "screw-on ratcheting type" feature.

- To remove — rotate cap counterclockwise to clear the inside of the filler neck. This will allow any residual pressure to escape.
- To install — reverse this procedure and tighten cap securely until a "ratcheting", clicking sound is heard indicating cap is on properly.

NOTICE: If you need to replace the fuel cap, use only a cap specified for your model. An incorrect fuel cap can result in a serious malfunction of the fuel system or emission control system. You can get a correct replacement cap from your dealer.

CATALYTIC CONVERTER (GASOLINE ENGINES ONLY)

The catalytic converter on your Light Duty Emission Class Vehicle (See Chart after "Fuel Requirements" in Section 2) is an emission control device added to the exhaust system to reduce exhaust gas pollutants. The converter contains a ceramic material coated with noble metal catalysts. To prevent contamination and loss of effectiveness of the catalysts, unleaded gasoline must be used. Unleaded gasoline also reduces spark plug fouling, exhaust system corrosion and engine oil deterioration. Leaded gasoline will also damage the oxygen sensor in the Computer Command Control system (California only) which could affect emission control.

To help prevent damage:

1. Keep your engine properly maintained. Engine malfunctions involving the electrical, carburetion, electronic fuel injection or ignition systems may result in unusually high catalytic converter and exhaust system temperatures which, under extreme malfunctioning conditions, may ignite interior floor-covering materials above the converter. Do not keep driving your vehicle if you detect engine misfire, noticeable loss of performance, or other unusual operating conditions. Instead, have it serviced promptly. Refer to the Maintenance Schedule booklet for information on inspecting and maintaining the engine, exhaust system, and other components.
2. Do not push or tow this vehicle to start it. This may result in unusually high catalytic converter and exhaust system temperatures which under extreme conditions may ignite interior floor-covering material above the converter.

Disregarding these instructions could damage the catalytic converter, the vehicle, or nearby property and affect warranty coverage.

HEAVY DUTY EXHAUST SYSTEM (GASOLINE ENGINES ONLY)

To meet Federal regulations, Heavy Duty Emission Class Vehicles (See chart after "Fuel Requirements" in Section 2) have an exhaust system made of special materials to withstand high exhaust system temperatures.

CAUTION: To help avoid fire, use only GM or equivalent heat shields and exhaust system parts. Do not operate engine without heat shields installed.

1. Keep your engine properly maintained. Engine malfunctions involving the electrical, carburetion, or ignition systems may result in unusually high exhaust system temperatures which, under extreme malfunctioning conditions, may ignite interior floor covering materials above the exhaust system. Do not keep driving your vehicle if you detect engine misfire, noticeable loss of performance, or other unusual operating conditions. Instead, have it serviced promptly. Refer to the Maintenance Schedule booklet for information on inspecting

and maintaining the engine, exhaust system, and other components.

2. Do not push or tow this vehicle to start it. This may result in unusually high exhaust system temperatures which under extreme conditions may ignite interior floor-covering materials above the exhaust system.

Disregarding these instructions could damage the exhaust system, the vehicle, or nearby property and affect warranty coverage.

THE COMPUTER COMMAND CONTROL SYSTEM

Some gasoline engine vehicles sold in the United States have the Computer Command Control system.

The Computer Command Control system monitors the exhaust stream with an oxygen sensor. Based on sensor signals, the electronic control module adjusts the air-fuel ratio as needed. It is very important to use only unleaded gasoline in vehicles equipped with the Computer Command Control system. Leaded gasoline will damage the oxygen sensor, and may affect emission control.

Air Injection Reaction (A.I.R.) System (Vehicle Over 8600 GVW)

Heavy duty Federal emissions gas engines with vehicle weight over 8600 GVW have an Air Injection Reaction System with a "SERVICE ENGINE SOON" light.

This system has an Air Control Valve(s) that has an electric solenoid(s) to combine electronic control with normal diverter valve function. The solenoid(s) is energized through a control module. If there is need for service of the control module, wiring harness or solenoid(s), a "SERVICE ENGINE SOON" light will illuminate on the instrument cluster.

"CHECK ENGINE" or "SERVICE ENGINE SOON" Light

California light duty emission class engines have a "CHECK ENGINE" light, and all Federal heavy duty emission class gas engine vehicles over 8600 GVW have a "SERVICE ENGINE SOON" light. The "CHECK ENGINE" (or "SERVICE ENGINE SOON") light on the instrument panel should come on to indicate the need for emission system service. It should come on during engine starting to let you know the bulb is working. (The light will stay on a short time after the engine starts.) Have the system repaired if the "CHECK

ENGINE” (or “SERVICE ENGINE SOON”) light does not come on during engine starting.

If the light comes on, either intermittently or continuously while driving, service to the emission system is required. Although in most cases the vehicle is driveable, and does not require towing, see your GM dealer as soon as possible for service of the system.

Continued driving without having the system serviced could cause damage to the emission control system. It could also affect fuel economy and driveability.

See also Computer Command Control or A.I.R. System (Vehicle over 8600 GVW).

DIESEL ENGINE CLEANING

NOTICE: Your diesel engine does not need periodic cleaning, nor does GM recommend it be cleaned. However, if you insist on cleaning the engine, clean it only when it is cold, never when it is warm or hot, and never when the engine is running. Spraying or pouring water or other fluids on your engine when it is warm or hot, or when it is running, can cause serious damage to the engine and its components.

AIR CLEANER — FLAME ARRESTOR

CAUTION: The air cleaner also functions as a flame arrestor in the event of engine backfire. The air cleaner should be installed at all times unless its removal is necessary for repair or maintenance. To help reduce the risk of personal injury and property damage, be sure that no one is near the engine compartment before starting the engine with the air cleaner removed. If engine backfires occurs with the air cleaner removed, there could be a burst of flame and possible other fire in the engine compartment.

On vehicles with diesel engines, do not use starting fluids — immediate engine damage can result. Also take care not to let objects fall into the engine if the air cleaner is removed. If the engine is running, suction can pull loose objects into the engine. Objects pulled or dropped into the engine can cause costly engine damage.

When replacement of air cleaner filter element is necessary, an AC air filter element is recommended.

See your Maintenance Schedule for change intervals. Operation of vehicle in dusty areas will necessitate more frequent replacement. Your dealer can be of assistance in determining the proper replacement frequency for the conditions under which you operate your vehicle.

ENGINE OIL AND FILTER RECOMMENDATIONS (GASOLINE ENGINES)

The following engine oil recommendations are based upon the operation of your engine with the fuels recommended under “Fuel Requirements” in Section 2 of this manual.

CHECK OIL LEVEL (GASOLINE ENGINES)

The engine oil must be kept at the right level to help assure proper lubrication of your vehicle's engine. It is normal for an engine to use some oil, and some engines may use more oil when they are new. It

is the owner's responsibility to check the oil level at regular intervals (such as every fuel stop), according to the following instructions:

- The best time to check the engine oil level is when the oil is warm, such as during a fuel stop. After stopping the engine, wait a few minutes for the oil to drain back to the oil pan. Then, pull out the dipstick located on the side of the engine (either left or right). Wipe it clean, and push the dipstick back down all the way. Now, pull out the dipstick and look at the oil level on it.

Add oil, if needed, to keep the oil level above the "ADD" line. Avoid overfilling the engine since this may cause engine damage. Push the dipstick back down all the way after taking the reading.

- If you check the oil level when the oil is cold, do not run the engine first. The cold oil will not drain back to the pan fast enough to give a true oil level.


CHOOSING THE RIGHT QUALITY OIL (GASOLINE ENGINES)

Engine oils are labeled on the containers with various API (American Petroleum Institute) designations of quality. Be sure the oil you use has both API designation "SF" and either "CC" or "CD". These designations may be shown alone such as "SF", "CC", and/or "CD", or they may be shown together such as "SF/CC" and/or "SF/CD". These designations may be separated by commas, slashes, or dashes. Do not use oils labeled only "SF", or only "CC", or only "CD". Also, do not use lower quality oils labeled only SA, SB, SC, SD, SE, CA, or CB; or oils with a combination of letters — such as "SE/CC" or "SE/CD" as this may cause engine damage.

CHOOSING OIL VISCOSITY (GASOLINE ENGINES)

Engine oil viscosity (thickness) has an effect on fuel economy and cold-weather operation (starting and oil flow). Lower viscosity engine oils can provide better fuel economy and cold weather performance; however, higher temperature weather conditions require higher viscosity engine oils for satisfactory lubrication. Using oils of any viscosity other than those viscosities recommended could result in engine damage.

When choosing an oil, consider the range of temperature your vehicle will be operated in before the next oil change. Then, select the recommended oil viscosity from the following chart. If outside temperatures are expected to be above -18°C (0°F) prior to your next oil change, SF/CC quality, SAE 10W-30 Energy-Conserving engine oil is the preferred viscosity grade.

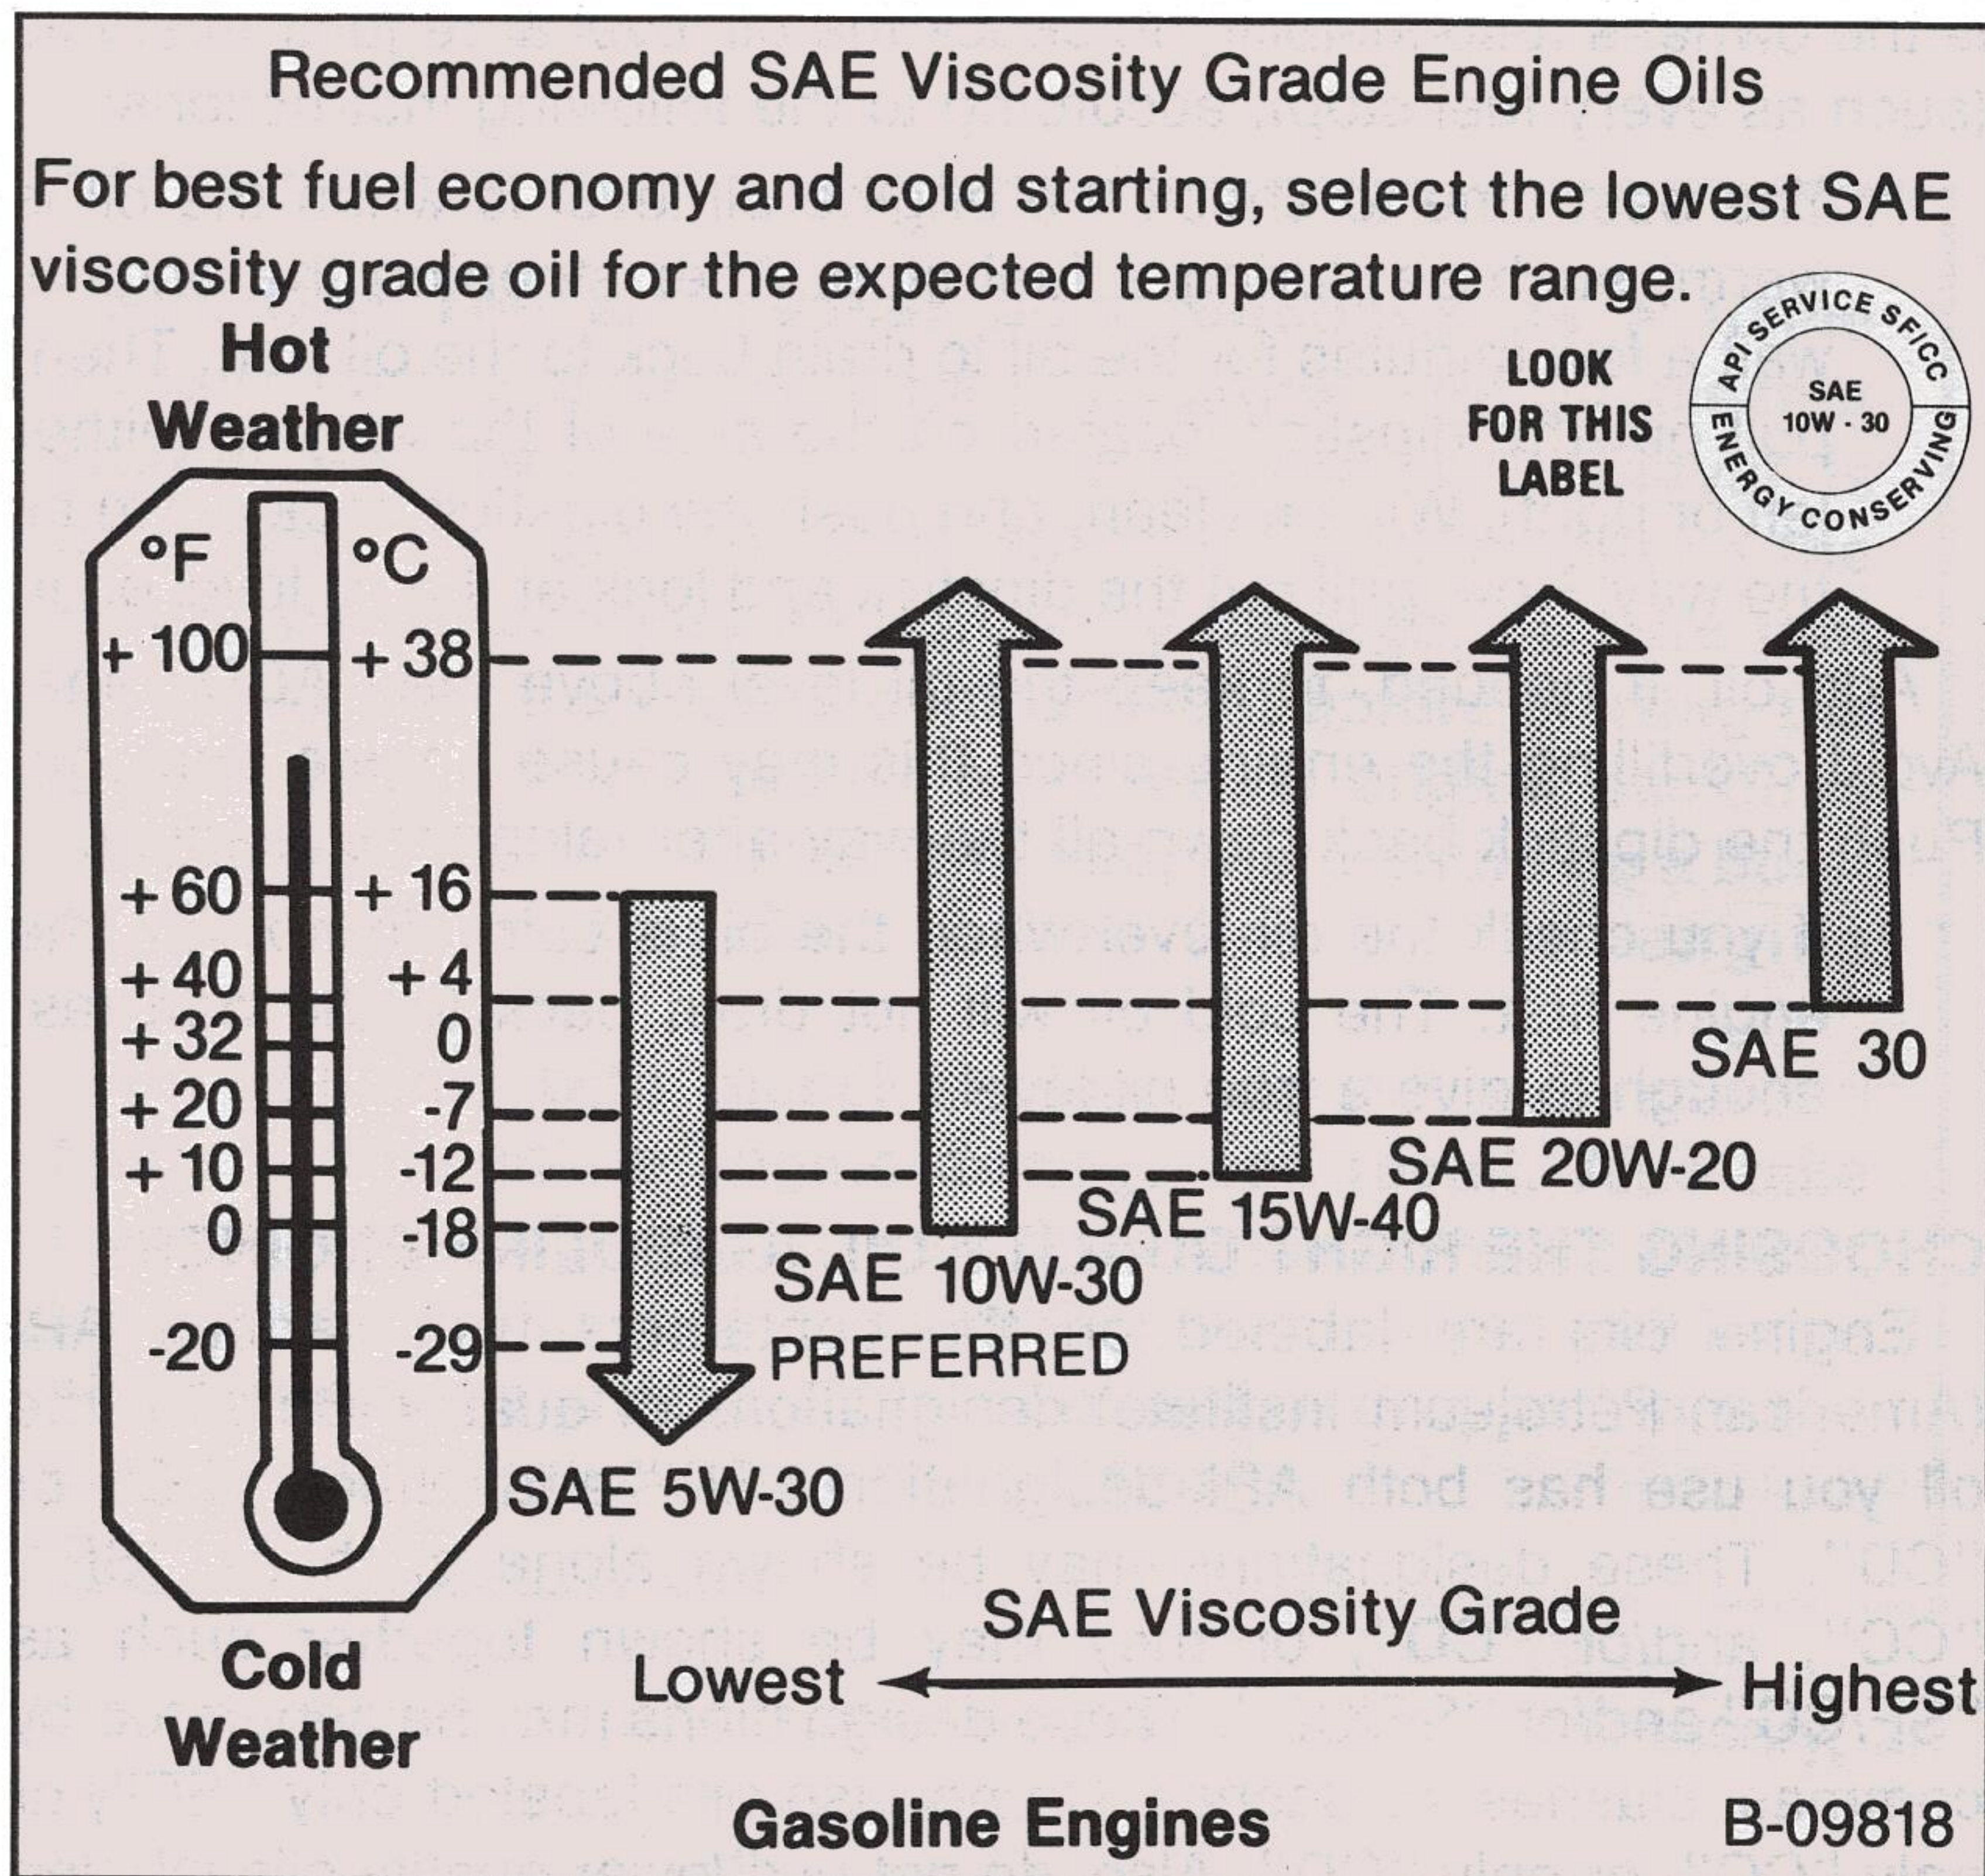


ENERGY CONSERVING OILS (GASOLINE ENGINES)

It is recommended that you select an oil not only of the proper quality and viscosity, but also a fuel-saving product. These oils can be found in dealer service departments, service stations and other retail stores. They are identified by words such as: "Energy Conserving," "Energy Saving," "Conserves Gasoline," "Gas Saving," "Gasoline Saving," "Friction Reducing," "Improved Gasoline Mileage," "Improved Fuel Economy," or "Fuel Saving."

OIL IDENTIFICATION LOGO (GASOLINE ENGINES)

Starting in 1983, a logo (symbol) was added to some oil containers to help you select the oil you should use. The top portion of the logo shows the oil quality by API designations such as SF, SF/CC, or others. The center portion of the logo will probably show the SAE viscosity grade, such as SAE 10W-30. "Energy Conserving," shown in the lower portion, indicates that the oil has fuel-saving capabilities.

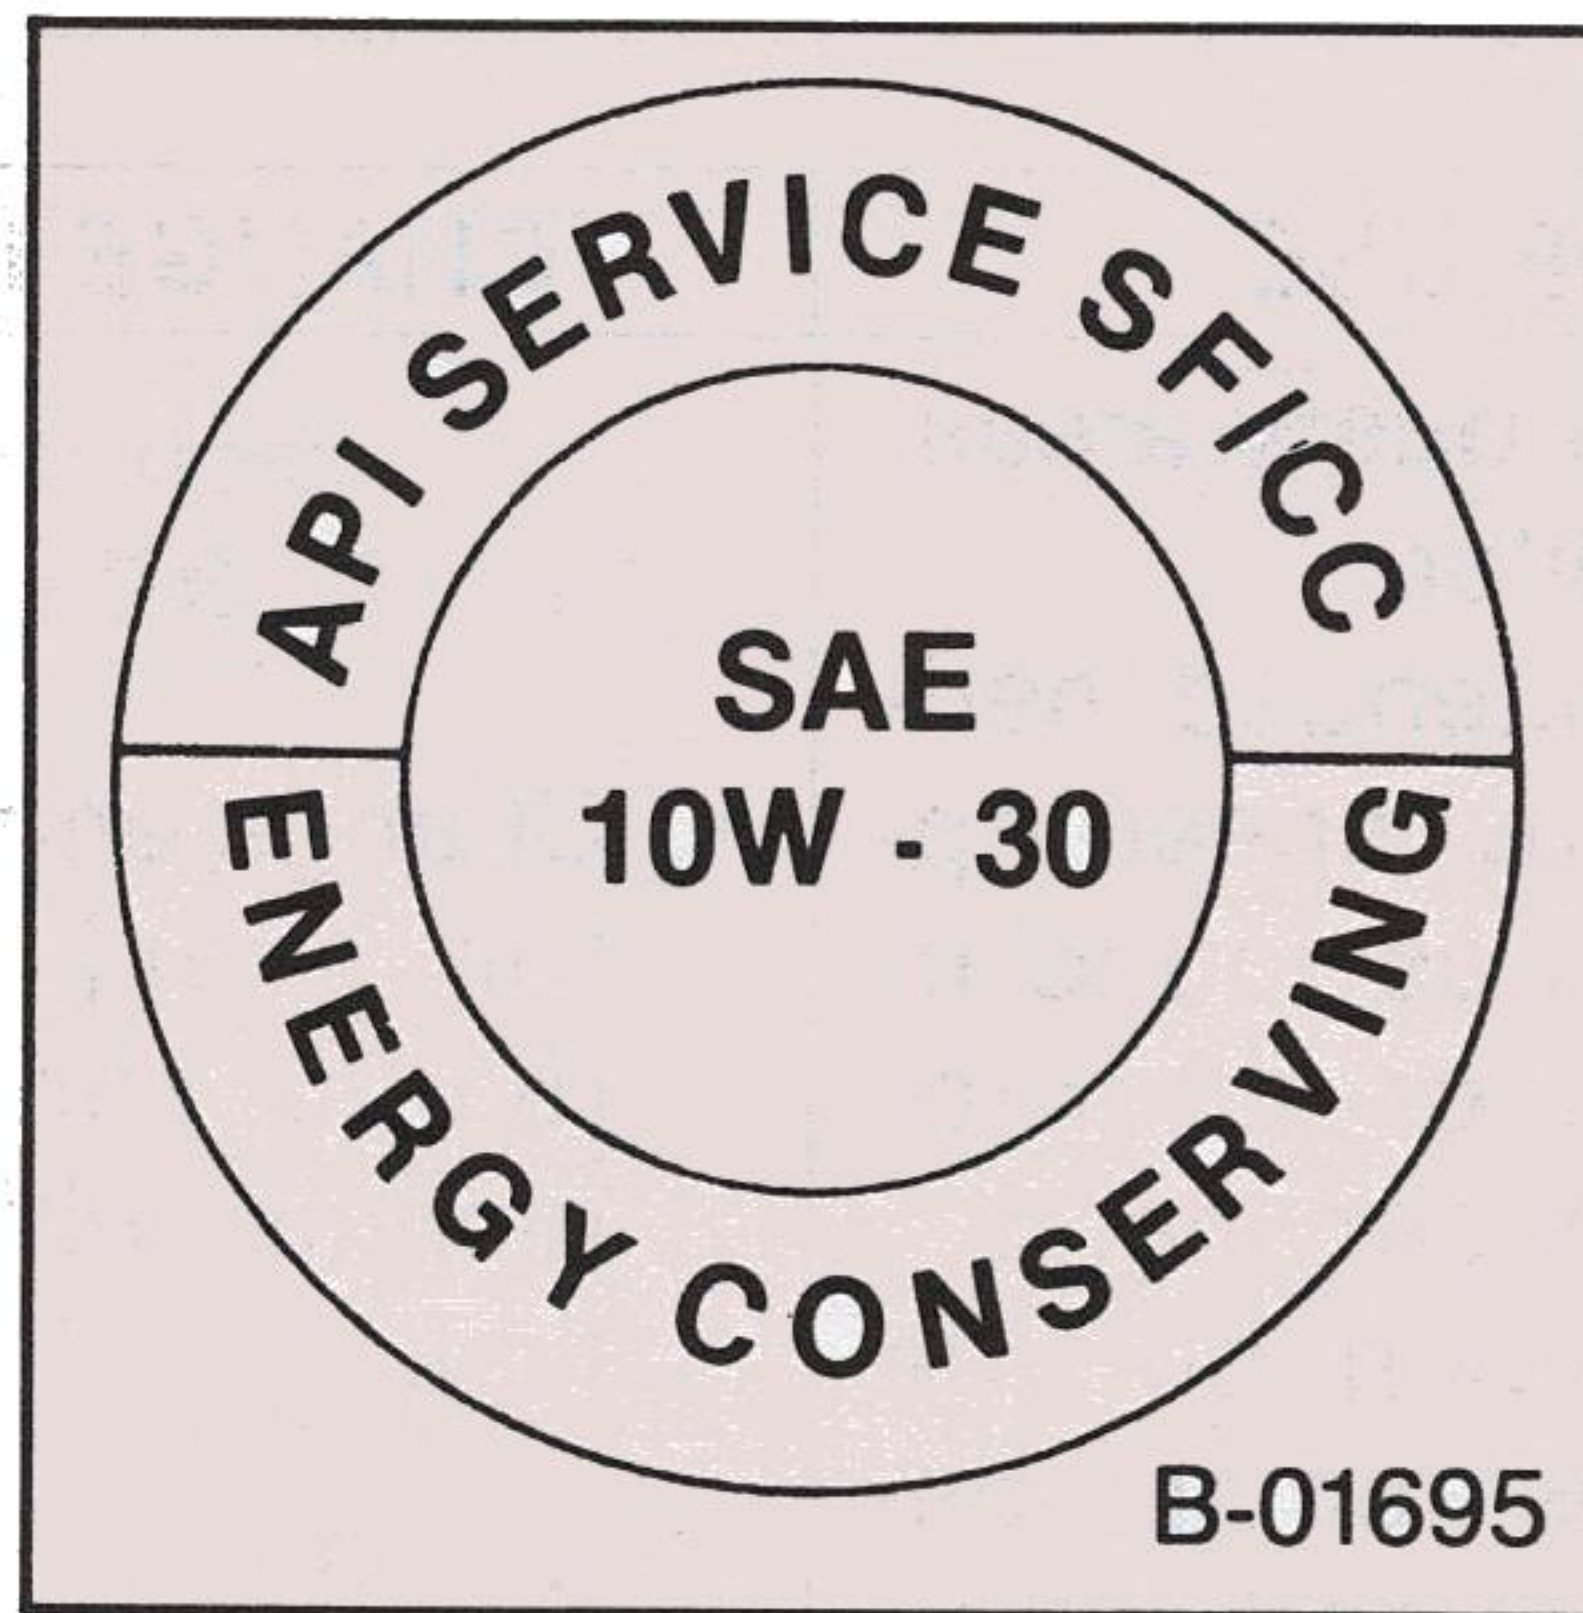

CHANGE INTERVALS (GASOLINE ENGINES)

The oil and oil filter change intervals for your engine are based on the use of the recommended oil quality and viscosity, as well as high-quality filters such as AC oil filters. Using oil other than recommended, or oil and filter change intervals longer than recommended could reduce engine life. Damage to engines due to improper maintenance or use of incorrect oil quality and/or viscosity is not covered by the new vehicle warranties.

Your engine was filled with a high-quality engine oil when it was built. You do not have to change this oil before the first recommended change interval.

Oil and filter change intervals depend upon how you use your vehicle. The following should assist in determining the proper oil and filter change intervals:

TYPE OF USE	CHANGE INTERVAL
• Operating in dusty areas. • Towing a trailer. • Idling for extended periods and/or low speed operation such as found in police taxi, or door-to-door delivery service. • Operating when outside temperatures remain below freezing and when most trips are less than 4 miles (6 kilometers).	• Change engine oil and filter every 3,000 miles (5 000 kilometers) or 3 months, whichever comes first.
• When none of the above conditions apply, and as a general rule the vehicle is driven daily for a — minimum of 15 miles (25 kilometers) or more. — or continuously for 30 minutes or more.	• Change engine oil every 7,500 miles (12 500 km) or 12 months, whichever comes first. Change engine oil filter at first oil change, then every other oil change if mileage determines when you change oil. If time determines change intervals, change the filter with each oil change.

B-09807

TYPE OF USE (ABOVE 8,600 LBS. GVWR)	CHANGE INTERVAL
• Frequent long runs at high speeds and high ambient temperatures. • Operating in dusty areas. • Towing a trailer. • Idling for extended periods and/or low speed operation such as found in police taxi or door-to-door delivery service. • Operating when outside temperatures remain below freezing and when most trips are less than 4 miles (6 kilometers).	• Change engine oil and filter every 3,000 miles (5 000 kilometers) or 2 months, whichever occurs first.
• When none of the above conditions apply and as a general rule the vehicle is driven daily for a —minimum of 15 miles (25 kilometers) or more. —or continuously for 30 minutes or more.	• Change engine oil every 6,000 miles (10 000 kilometers) or 4 months, whichever comes first. • Change engine oil filter at first oil change, then every other oil change if mileage determines when you change oil. If time determines change intervals, change the filter with each oil change.

B-09808

ENGINE OIL ADDITIVES (GASOLINE ENGINES)

Engine oils contain a variety of additives. Your engine should not need any extra additives if you use the recommended oil quality and

change intervals. However, if you think your engine has an oil-related problem, a supplemental additive ("GM Engine Oil Supplement") is available that may solve your problem. Supplemental engine oil additives should be used only for remedial purposes and not on a regular basis. Consult your dealer who can provide you with this tested and approved additive.

USED OIL DISPOSAL (GASOLINE ENGINES)

Do not dispose of used oil (or any other oil) in a careless manner such as pouring it on the ground, into sewers, or into streams or bodies of water. Instead, recycle it by taking it to a used oil collection facility which may be found in your area. If you have a problem disposing of your used oil, it is suggested that you contact your dealer or a service station.

ENGINE OIL AND FILTER (DIESEL ENGINES)

The following engine oil recommendations are based on operating your engine with the fuels recommended under "Diesel Fuel Requirements and Fuel System" in Section 2 of this manual.

NOTICE: Engine damage due to improper maintenance, or to using oil of the improper quality and/or viscosity, is not covered by the new vehicle warranty.

CHECKING OIL LEVEL (DIESEL ENGINES)

It is normal for an engine to use some oil, and some engines may use more oil when they are new. The engine oil must be kept at the right level to help assure proper lubrication of your vehicle's engine. It is the owner's responsibility to check the oil level at regular intervals (such as every fuel stop), according to the following instructions.

- The best time to check the engine oil level is when the oil is warm, such as during a fuel stop. After stopping the engine, wait a few minutes for the oil to drain back to the oil pan. Then pull out the dipstick on the side of the engine block (either left or right). Wipe the dipstick clean, then push the dipstick back down all the way. Now, pull out the dipstick and look at the oil level on it.

- Add oil, if needed, to keep the oil level above the “ADD” line. Avoid overfilling the engine since this may cause damage. Push the dipstick back down all the way after taking the reading.
- If you check the oil level when the oil is cold, do not run the engine first. The cold oil will not drain back to the pan fast enough to give a true oil level.

CHOOSING THE RIGHT QUALITY OIL (DIESEL ENGINES)

Engine oils are labeled on the containers with various API (American Petroleum Institute) designations of quality. Use an oil labeled with both designations SF and CD, or, with both designations SF and CC.

These designations may be separated by commas, slashes or dashes; it does not matter, as long as “SF” and “CD” (or “SF” and “CC”) appear.

Oils which are not labeled SF/CD (or SF/CC) should not be used. For example, do not use oils labeled with only SA, SB, SC, SD, SE, CA, CB, CC, or CD; or oils with a combination of any of these letters, (such as “SE/CD”) as this may cause engine damage.

CHOOSING OIL VISCOSITY (DIESEL ENGINES)

Engine oil viscosity (thickness) has an effect on fuel economy and cold-weather starting. Lower viscosity engine oils can provide better fuel economy; however, higher temperature weather conditions require higher viscosity engine oils for satisfactory lubrication.


When choosing an oil, consider the range of temperature your vehicle will be operated in before the next oil change. Then, select the recommended oil viscosity from the chart.

SAE 30 viscosity oil is preferred, and should be used whenever possible. (SAE 30 is also preferred for continuous duty driving.) When you expect the temperature to go below freezing (0°C, 32°F) repeatedly before the next oil change, use only SAE 10W-30 or SAE 15W-40 for improved oil flow and cold starting.

Do not use SAE 10W-40 or any other viscosity oil not recommended. Such oils could cause engine damage, and such damage is not covered by the new vehicle warranties.

RECOMMENDED SAE VISCOSITY GRADE ENGINE OILS


SELECT THE SAE GRADE OIL BASED ON THE EXPECTED TEMPERATURE RANGE BEFORE NEXT OIL CHANGE

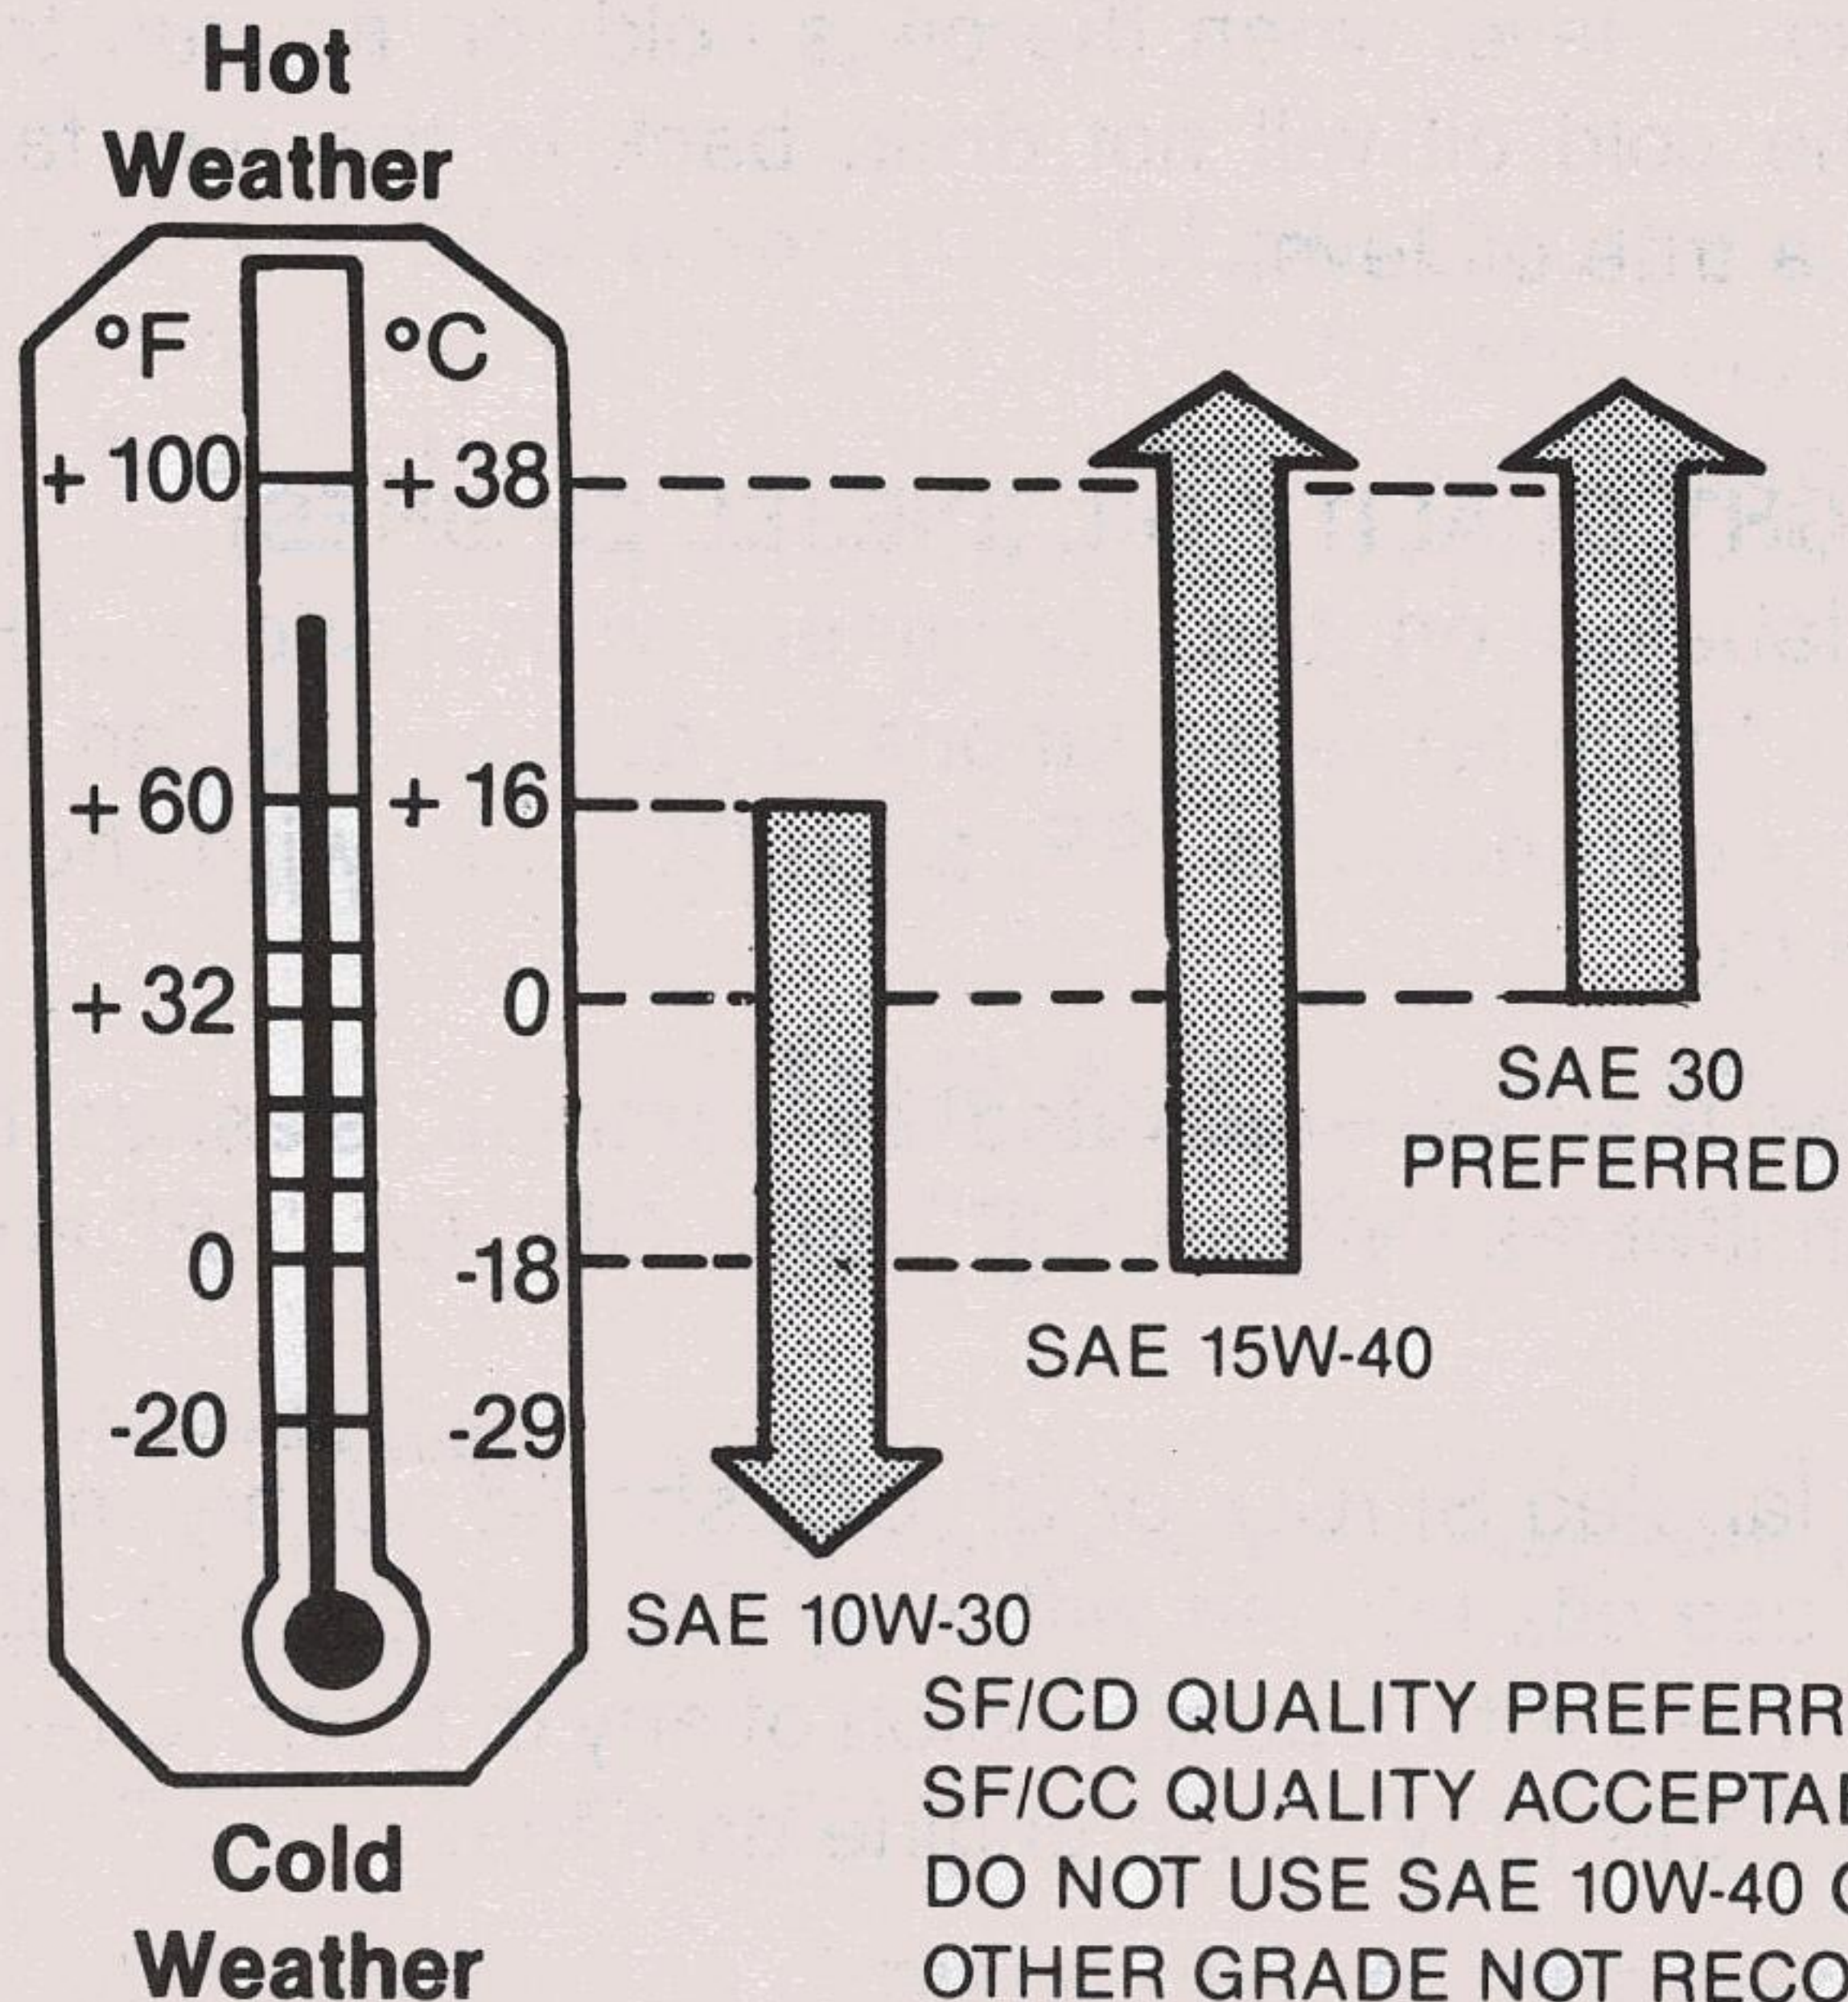

B-09819

OIL IDENTIFICATION LOGO (DIESEL ENGINES)

Starting in 1983, a logo (symbol) was added to some oil containers to help you select the oil you should use. The top portion of the logo shows the oil quality by API designations — such as SF/CC, SF/CD, or others. The center portion of the logo shows the SAE viscosity grade, such as SAE 30.

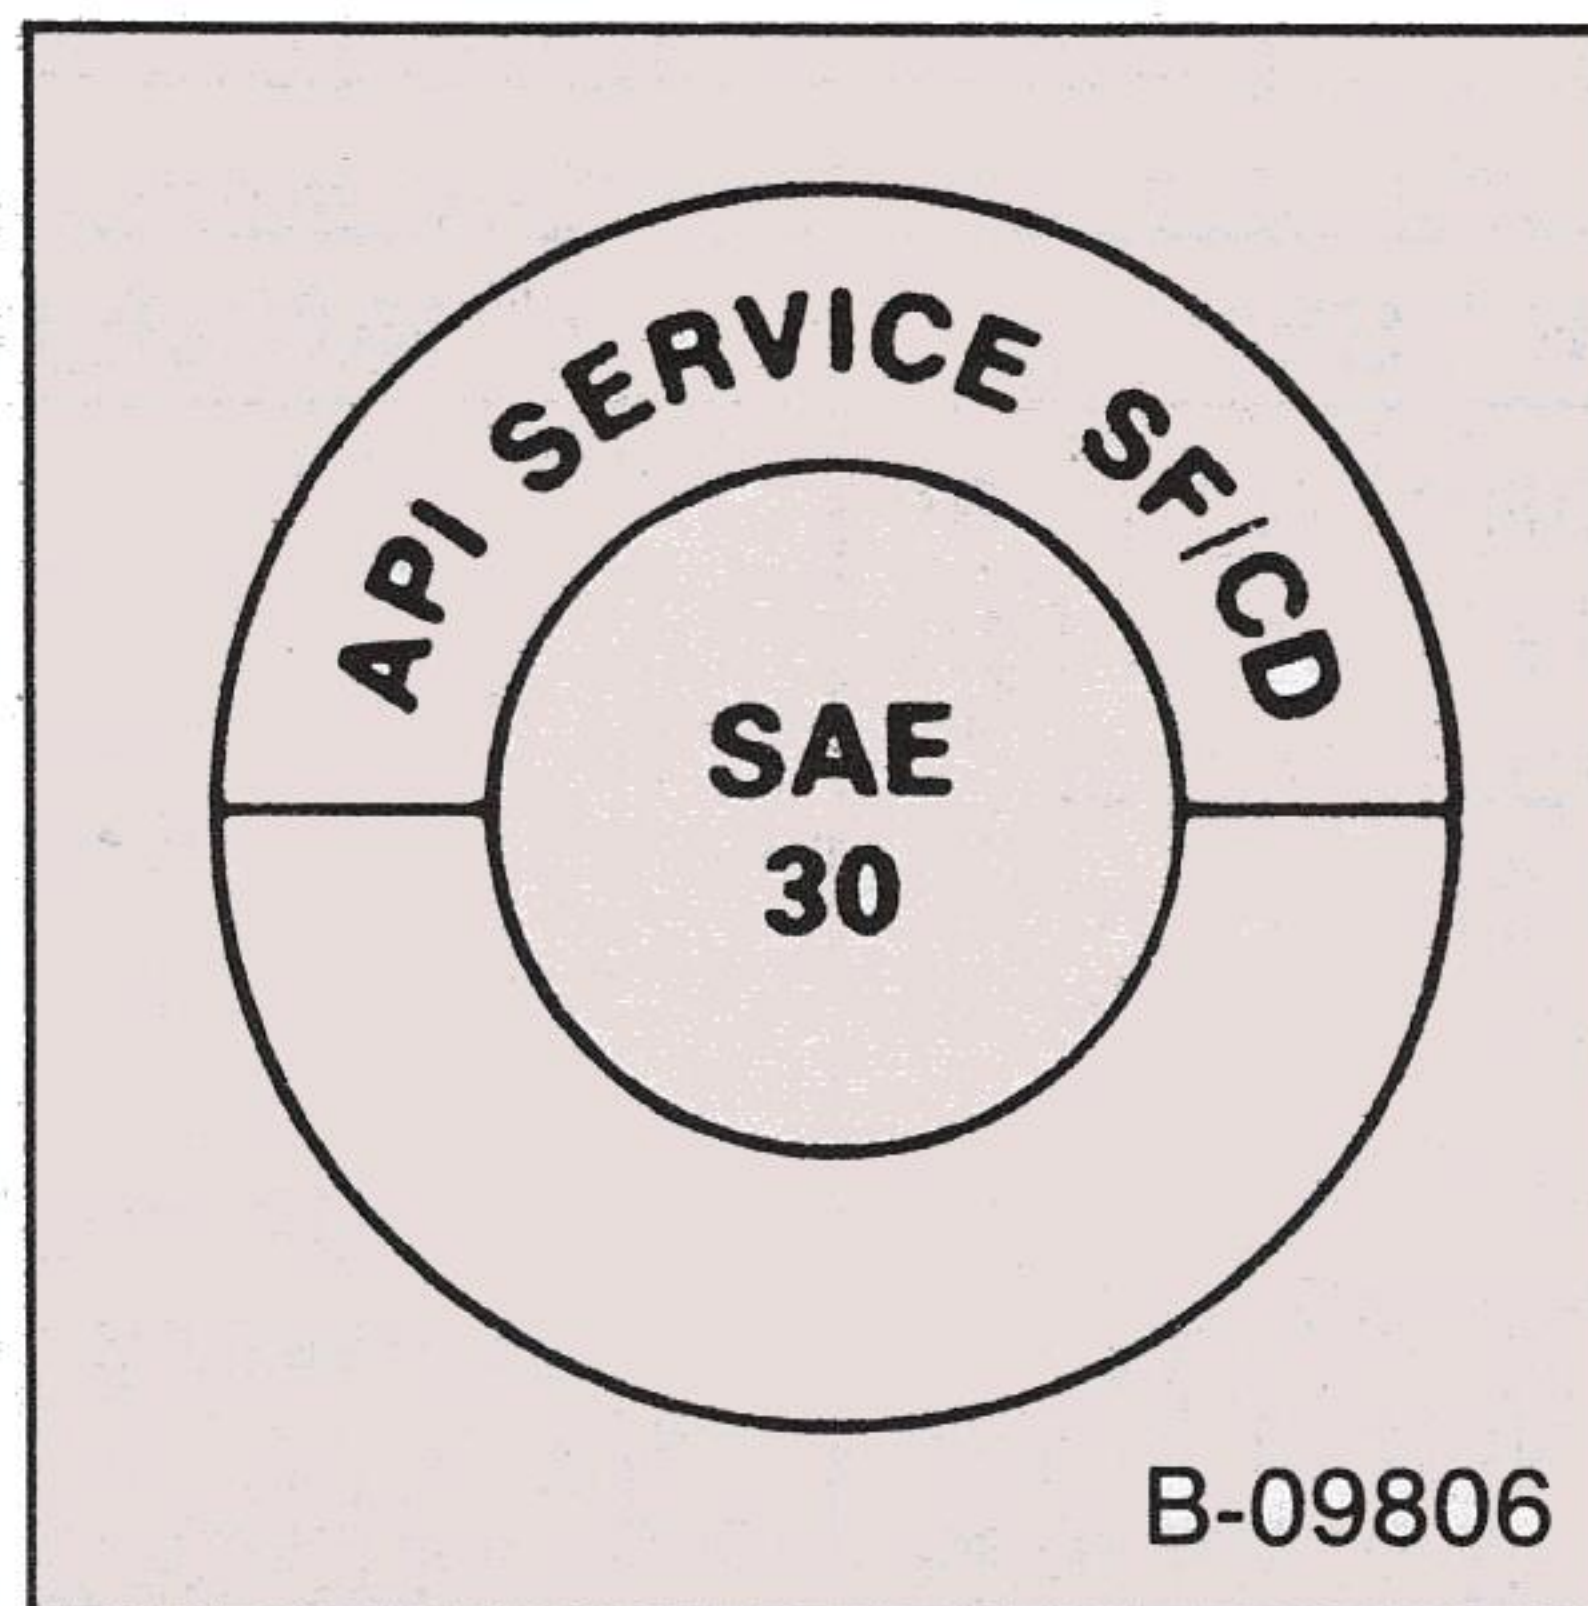

CHANGE INTERVALS (DIESEL ENGINES)

The oil and oil filter change intervals for your engine are based on the use of the recommended oil quality and viscosity, as well as high-quality filters such as AC oil filters. Using oil other than recommended, or oil and filter change intervals longer than recommended, could reduce engine life. Damage to engines due to improper maintenance or use of incorrect oil quality and/or viscosity is not covered by the new vehicle warranty.

Your engine was filled with a high-quality engine oil when it was built. You do not have to change this oil before the first recommended change interval.

Oil and filter change intervals depend on how you use your vehicle. The following should assist in determining the proper oil and filter change intervals:

TYPE OF USE	CHANGE INTERVAL
• Frequent long runs at high speeds and high ambient temperatures. • Operating in dusty areas. • Towing a trailer. • Idling for extended periods and/or low speed operation such as found in police, taxi or door-to-door delivery service. • Operating when outside temperatures remain below freezing and when most trips are less than 4 miles (6 kilometers).	• Change engine oil and filter every 2,500 miles (4 000 kilometers) or 3 months, whichever comes first.
• When none of the above conditions apply, and as a general rule the vehicle is driven daily for a minimum of 15 miles (25 kilometers) or more - or continuously for 30 minutes or more.	• Change engine oil filter every 5,000 miles (8 000 kilometers) or 12 months, whichever comes first.

B-09809

ENGINE OIL ADDITIVES (DIESEL ENGINES)

Engine oils contain a variety of additives. Your engine should not need any extra additives if you use the recommended oil quality and change intervals. However, if you think your engine has an oil-related problem, a supplemental additive ("GM Engine Oil Supplement") is available that may solve your problem. Supplemental engine oil additives should be used only for remedial purposes and not on a regular basis. Consult your authorized dealer, who can provide you with this tested and approved additive.

USED OIL DISPOSAL (DIESEL ENGINES)

Do not dispose of used engine oil (or any other oil) in a careless manner such as pouring it on the ground, into sewers, or into streams or bodies of water. Instead, recycle it by taking it to a used oil collection facility which may be found in your community. If you have a problem disposing of your used oil, it is suggested that you contact your dealer or service station. (This also applies to diesel fuel which is contaminated with water. See "Diesel Fuel Requirements and Fuel System" in Section 2.

AUTOMATIC TRANSMISSION FLUID RECOMMENDATIONS

PROPER FLUID

Use only automatic transmission fluid labeled DEXRON® II. You can buy this fluid from your dealer or other service outlets.

CHECKING FLUID LEVEL


Check the automatic transmission fluid level at each engine oil change. Driving with too much or too little fluid can damage the transmission.

To check the fluid level, first set the parking brake, then start the engine in "P" (Park), and let idle for two minutes. You must check the fluid level with the engine running at slow idle and the vehicle level.

You cannot read the correct fluid level if you have just driven the vehicle for a long time at high speed, in city traffic in hot weather, or if the vehicle has been pulling a trailer. Wait until the fluid cools down (about 30 minutes).

Remove the dipstick located at the rear of the engine compartment on the passenger's side. Carefully touch the wet end of the dipstick to find out if the fluid is cool, warm or hot. Wipe it clean and push it back in until the cap seats. Pull out the dipstick and read the fluid level.

- If it felt cool (about room temperature), the level should be 3 to 10 millimeters (1/8 to 3/8 inch) below the "ADD" mark. The dipstick has two dimples below the "ADD" mark to show this range.
- If it felt warm, the level should be close to the "ADD" mark (either above or below).
- If it was too hot to hold, the level should be at the "FULL" mark.

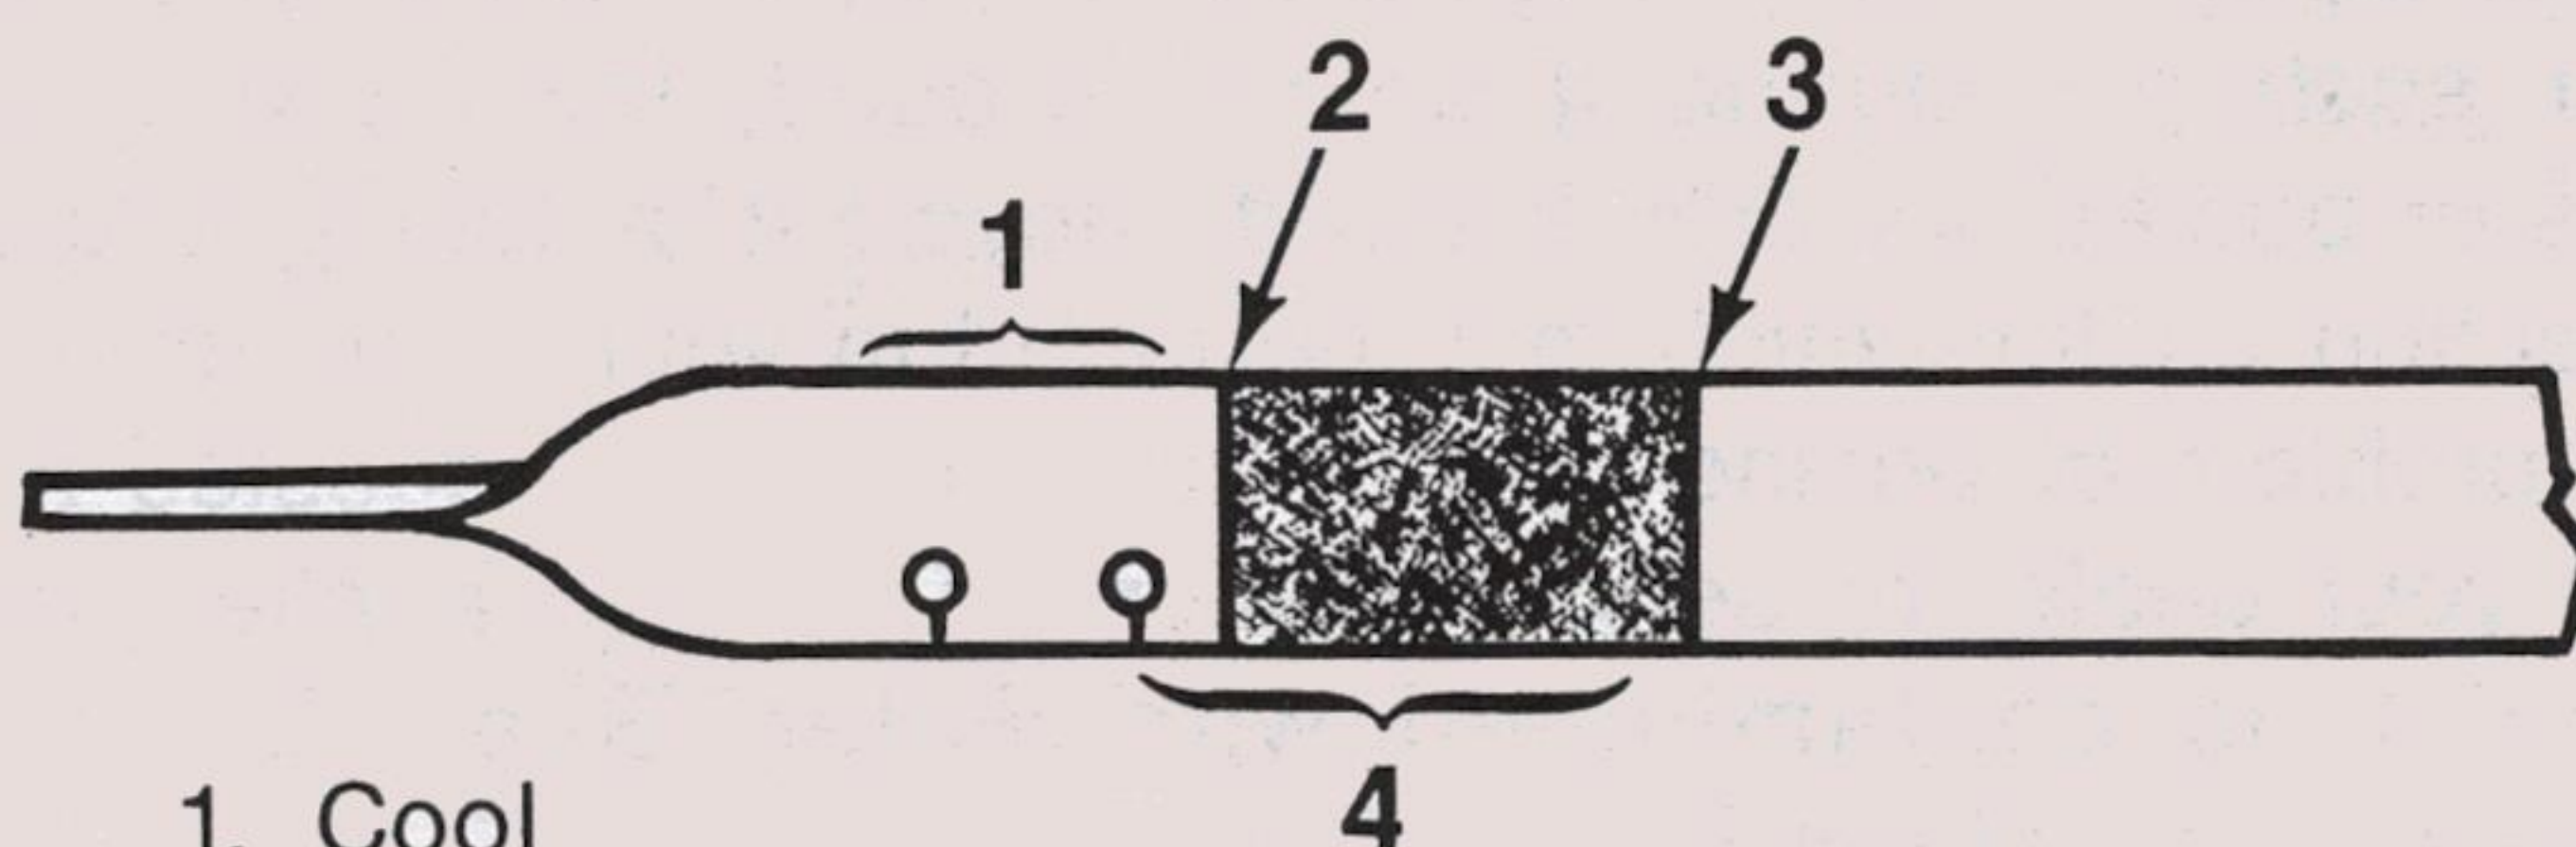

1. Cool
2. Add 1 Pt.
3. Full Hot
4. Warm

B-09606

Add just enough DEXRON® II fluid to fill the transmission to the proper level. It takes only 0.5 liter (one pint) to raise the level from “ADD” to “FULL” with a hot transmission.

AUTOMATIC TRANSMISSION DRAIN INTERVALS

Change the transmission fluid and change the filter as outlined in the Maintenance Schedule booklet.

MANUAL TRANSMISSION FLUID RECOMMENDATIONS

See the Maintenance Schedule booklet to find out how often the lubricant level should be checked and what type of lubricant should be used.

Add lubricant, if needed, to fill to the level of the filler plug hole.

MANUAL TRANSMISSION SHIFT LINKAGE

Lubricate linkage at the interval shown in the maintenance schedule with water resistant extreme pressure chassis lubricant which meets GM Specification 6031M.

NOTICE: The 3-speed and 4-speed transmissions have grease fitting provisions on the shifter assembly to allow for proper lubrication.

CLUTCH ADJUSTMENT

The clutch linkage should be checked and adjusted periodically as necessary to compensate for clutch facing wear. To check, depress pedal by hand until resistance is felt. Free travel should be approximately 25 to 38mm (1" to 1-1/2"); if very little or no free travel is evident, clutch adjustment is required.

ENGINE COOLING SYSTEM

CAUTION: If your cooling system overheats, see "Engine Cooling System Overheating" in Section 3. Continued operation of the engine even for a short time may result in a fire and the possibility of personal injury and/or severe vehicle damage.

Your vehicle has a coolant recovery system. Coolant in the system expands with heat and overflows into the recovery tank, mounted on the right front corner near the grille or on the fire wall to the right of the engine. When the system cools, coolant is drawn back into the radiator.

The cooling system was filled at the factory with a quality coolant that meets GM Specifications. It is important to use proper coolant to prevent damage to cooling system components. Coolants meeting GM Specification 1825-M or those specially formulated for aluminum component protection should be used. The cooling system is designed to use coolant (a mixture of ethylene glycol, corrosion inhibitors and water) rather than plain water alone. The coolant solution must be used year round to provide:


- freezing protection down to -29°C (-20°F), or -37°C (-34°F) in Canada or RPO C49.
- boiling protection up to 125°C (258°F), or 120°C (248°F) with a diesel engine,
- protection against rust and corrosion in the cooling system,
- the proper engine temperature for efficient operation and emission control, and
- proper operation of the coolant temperature light or gage.

See the Maintenance Schedule booklet to find out when the coolant must be replaced. Note that changing the coolant is needed to replenish the rust and corrosion inhibitors to make certain that all parts of the cooling system work well.

COOLING SYSTEM CARE

Check the cooling system at regular intervals, such as during fuel stops. You usually do not need to remove the radiator cap to check the coolant level. Lift the engine hood and look at the coolant level in the “see through” coolant recovery tank. When the engine is cold, the coolant level should be at the “Full Cold” mark on the recovery tank. When the engine has fully warmed up, the level should be above the “Full Cold” mark on the recovery tank.

If the coolant level is low, remove the cap on the coolant recovery tank. Add to the recovery tank enough of a 56/44 mixture of water and a good quality ethylene glycol antifreeze (meeting GM Specification 1825-M) to bring the level up to the proper mark. Put the cap back on the recovery tank.

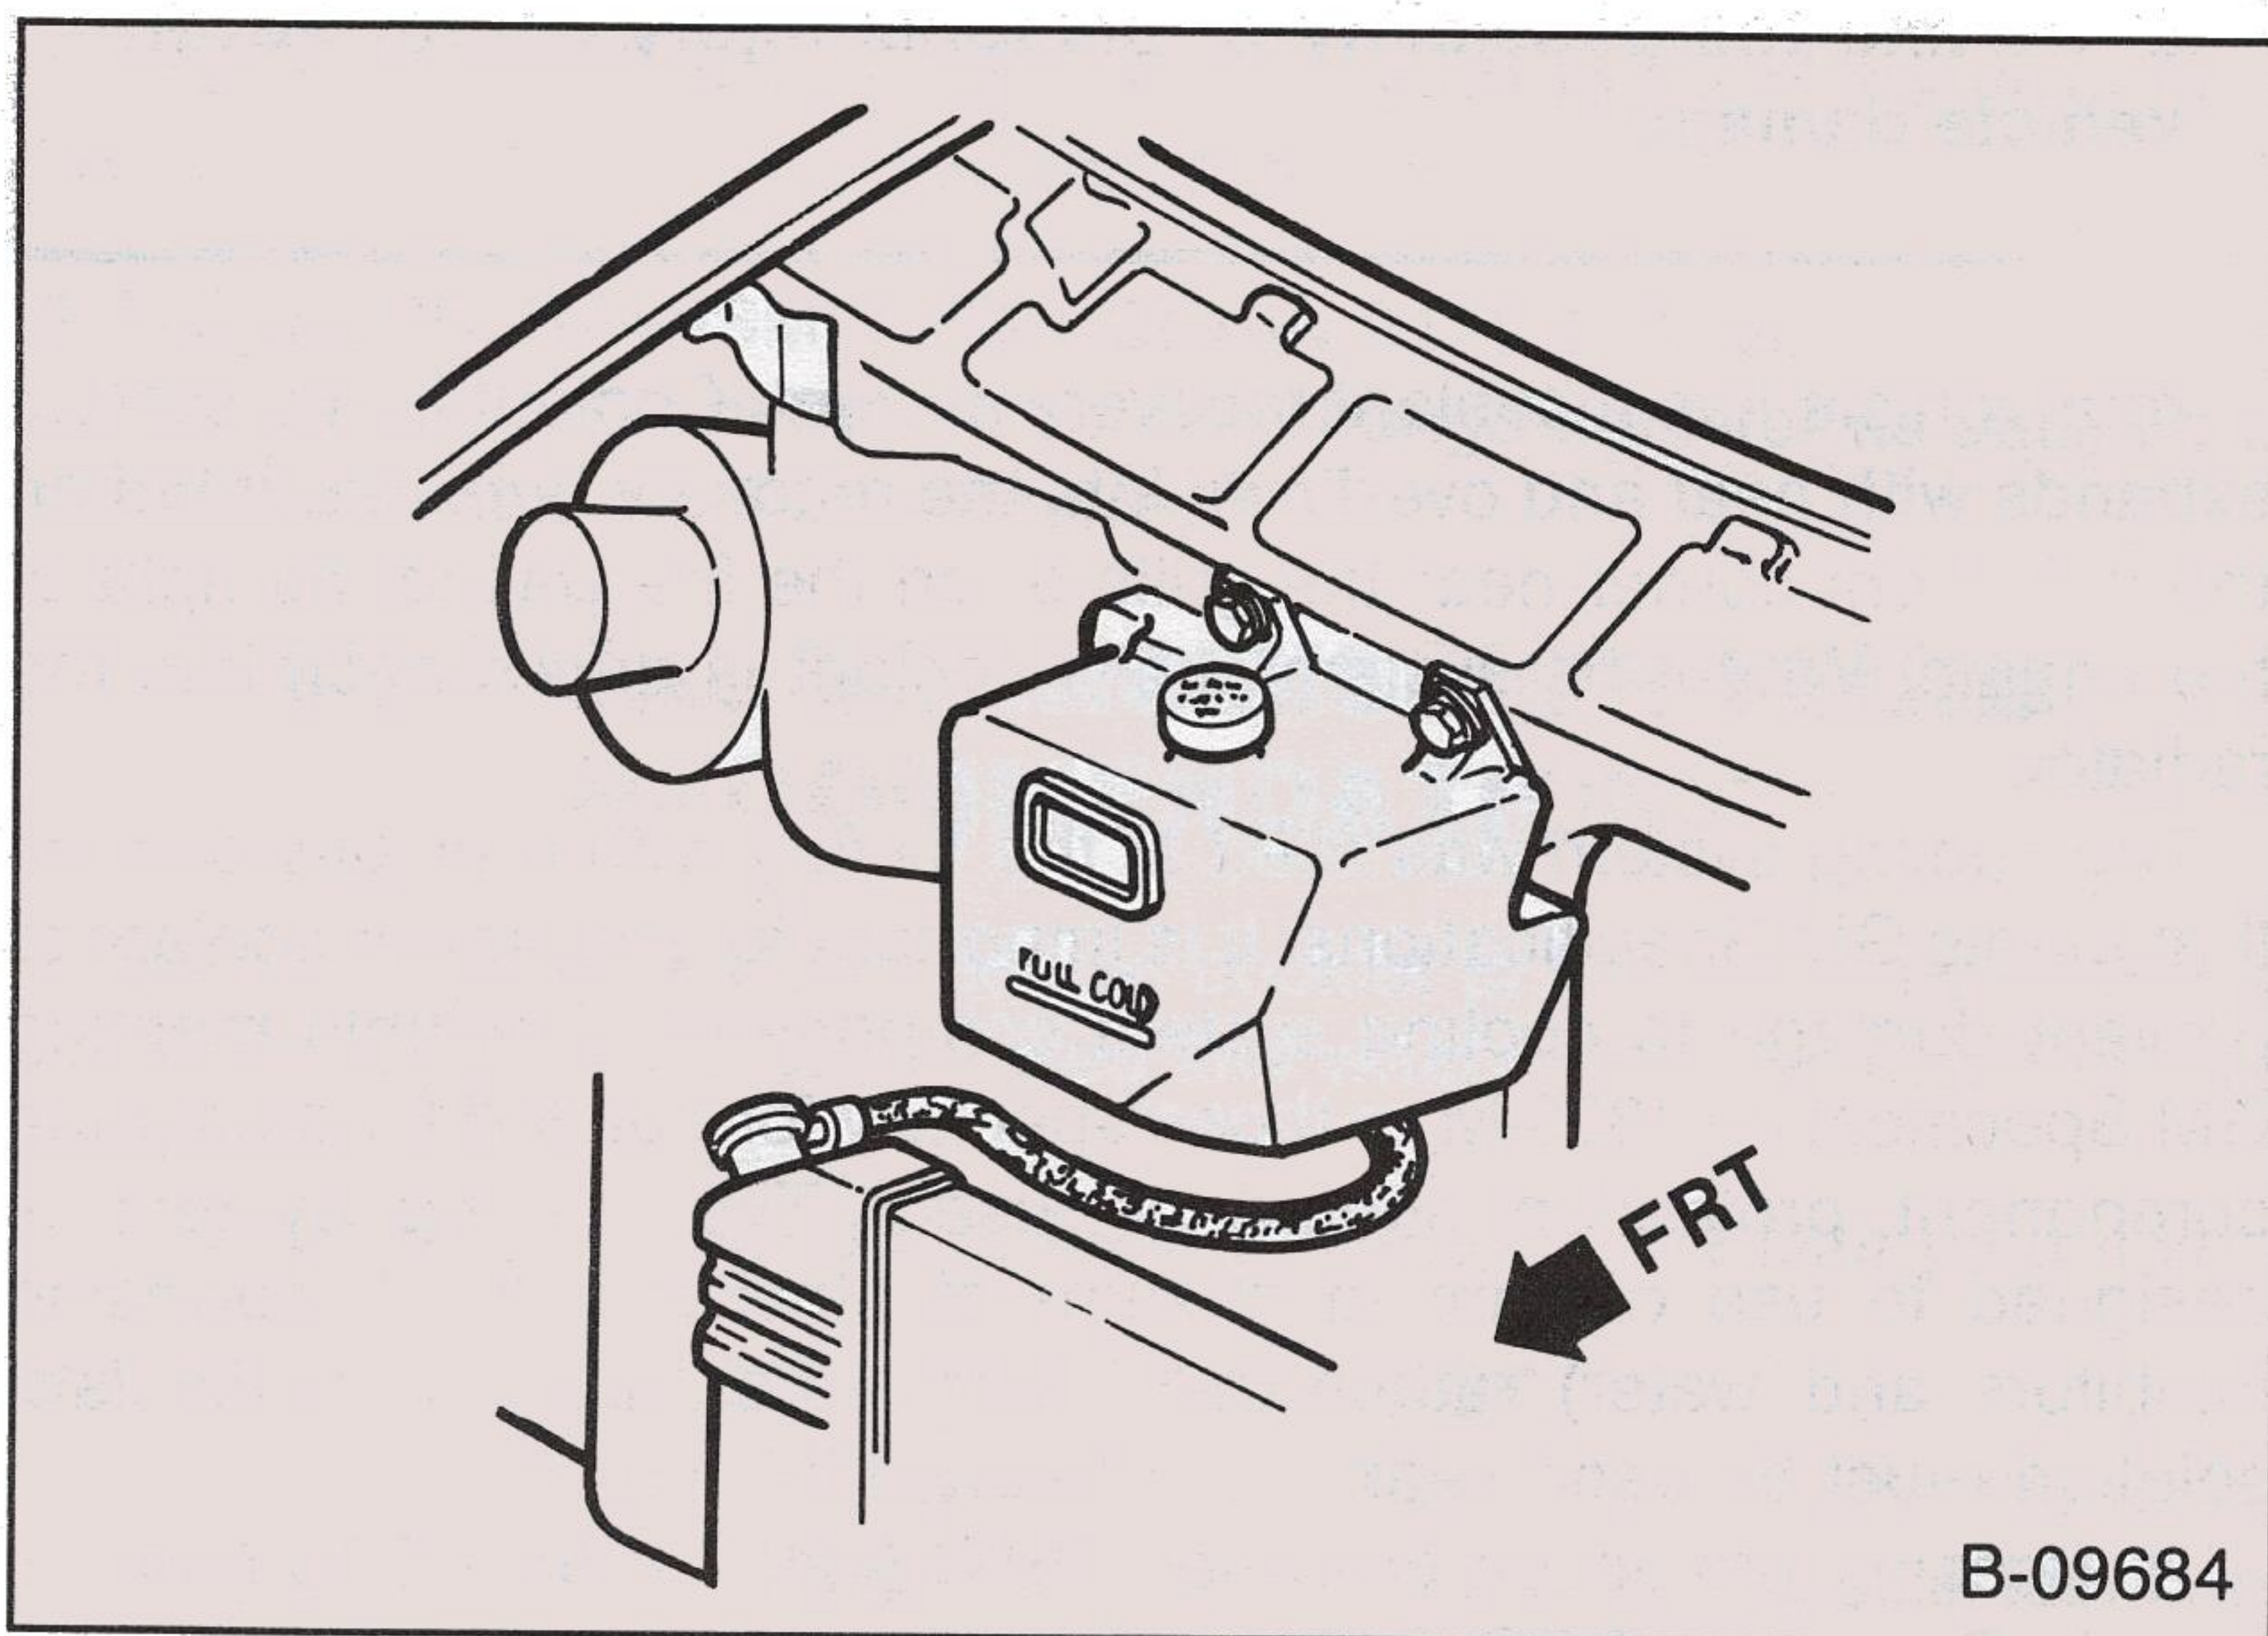

CAUTION: Under some conditions the ethylene glycol in engine coolant is combustible. To help avoid being burned when adding coolant, do not spill it on the exhaust system or engine parts that may be hot. If there is any question, have this service performed by a qualified technician.

Certain conditions, such as air trapped in the system, may affect the coolant level in the radiator. You should check the coolant level in the radiator at the time you change the engine oil and when the engine is cold. Follow the steps under “Adding Coolant” for the correct way to remove the radiator cap and add coolant.

If you have to add coolant more than four times a year (either to the recovery tank or to the radiator), or if coolant is dirty or discolored, see your dealer for a cooling system check.

NOTICE: If you use the proper quality antifreeze, there is no need to add extra inhibitors or additives which claim to improve the system. They may be harmful to the proper operation of the system.

ADDING COOLANT

Every vehicle has a radiator cap.

CAUTION: To help avoid being burned, do not remove the radiator cap while the engine and radiator are still hot. Scalding fluid and steam can be blown out under pressure if the cap is taken off too soon.

1. When the engine is cool, remove the radiator cap.
 - Turn the cap slowly to the left until it reaches a “stop.” Do not press down while turning the cap.
 - Wait until any remaining pressure (indicated by a hissing sound) is relieved, then press down on the cap and continue turning it to the left.
2. Add enough water and ethylene glycol antifreeze (meeting GM Specification 1825-M) to provide the required cooling, freezing and corrosion protection. Use a solution that is at least 44 percent antifreeze but no more than 70 percent antifreeze. Fill the radiator to the base of the filler neck and fill the coolant recovery tank until the level is slightly above the “Full Cold” mark. Put the recovery tank cap back on.
3. Run the engine, with the radiator cap removed, until the upper radiator hose is hot. With the engine idling, add coolant to the radiator until it reaches the bottom of the filler neck. Install the

radiator cap, making sure the arrows on the cap line up with the overflow tube on the radiator filler neck.

It Is The Owner's Responsibility To:

- Maintaining cooling system freeze protection at -29°C (-20°F), or -37°C (-34°F) in Canada or RPO C49, to ensure protection against corrosion and loss of coolant from boiling. A 56/44 mixture of water and ethylene glycol antifreeze will provide freeze protection to -29°C (-20°F), or -37°C (-34°F) in Canada or RPO C49. You should do this even if you don't expect freezing temperatures. Periodic replacement of coolant is needed to replace the anti-corrosion additives that wear out with use. Coolant that has become dark in color shows that it needs to be changed for this reason.
- Use only ethylene glycol base antifreeze that meets GM Specification 1825-M.

NOTICE: Do not use methanol-base antifreeze, or alcohol, or plain water alone, in your vehicle at any time. They will boil at a lower point than that at which the "TEMP" light (or temperature gage) will warn of overheating, and they do not provide proper protection against corrosion.

The LL4 diesel engine (Engine Code - J) has a deaeration tank instead of a coolant recovery tank. The deaeration tank should be kept approximately 1/2 full of a 56/44 mixture of water and ethylene glycol antifreeze (meeting GM Specification 1825-M). There is no radiator cap; to add coolant to the system a pressure cap is included on the deaeration tank. Follow all the cautions that apply to a system equipped with a coolant recovery tank.

NOTICE: The deaeration pressure cap, a 62 kPa (9 psi) must be used and installed tightly, otherwise coolant may be lost and damage to the engine may result from overheating. The cap should be checked periodically for proper operation.

THERMOSTAT

The engine coolant temperature is controlled by a thermostat. It stops coolant flow through the radiator until a preset temperature is reached. This thermostat is installed in the engine coolant outlet on the engine block. The same thermostat is used in both winter and summer. When a replacement is needed, GM AC-Delco parts are recommended.

RADIATOR PRESSURE CAP

NOTICE: The radiator cap, a 105 kPa (15 psi) pressure type, must be installed tightly, otherwise coolant may be lost and damage to engine may result from overheating. Radiator pressure cap should be checked periodically for proper operation. If replacement is required, an AC cap is recommended.

REAR AXLE, STANDARD

Refer to the Maintenance Schedule booklet to find out the lubricant change interval, how often the level should be checked and when the lubricant should be drained and refilled.

Add lubricant, if needed, to fill to the level of the filler plug hole on the passenger's side of the differential case. Use SAE 80W GL-5 or SAE 80W-90 GL-5 gear lubricant. (For those vehicles driven in Canada, use SAE 80W GL-5 gear lubricant.) You can also use special gear lubricant GM Part No. 1052271 or 1052272. You can buy these products from your GM dealer.

ACCELERATOR LINKAGE

Lubricate all pivot points with engine oil at the interval shown in the Maintenance Schedule. Do not lubricate the accelerator cable.

HOOD LATCHES AND HOOD HINGE

Refer to the Maintenance Schedule booklet to find out how to lubricate hood latch and hood hinge assembly.

BRAKE MASTER CYLINDER

Check master cylinder fluid level in both reservoirs at the interval shown in the Maintenance Schedule. If the fluid is low in the

reservoir, it should be filled to a point about 6mm (1/4") below lowest edge of each filler opening with Delco Supreme No. 11 or DOT-3 fluids.

HYDRO-BOOST BRAKE SYSTEM HYDRAULIC PUMP

A. Vehicles Equipped With Power Steering.

- On vehicles equipped with power steering, the power steering pump is also used as the Hydro-boost pump. See section on "Power Steering System" when checking fluid level or adding fluid.


B. Vehicles Equipped With Manual Steering.

- The Hydro-boost pump installed in vehicles equipped with manual steering uses power steering fluid. See section on "Power Steering System" when checking fluid level or adding fluid.

NOTICE: Power steering fluid and brake fluid cannot be mixed, since seal damage may result.

POWER STEERING SYSTEM

Check the fluid level in the optional power steering pump as recommended in the Maintenance Schedule booklet. Add GM Power Steering Fluid (GM Part Number 1050017 or equivalent) as needed:

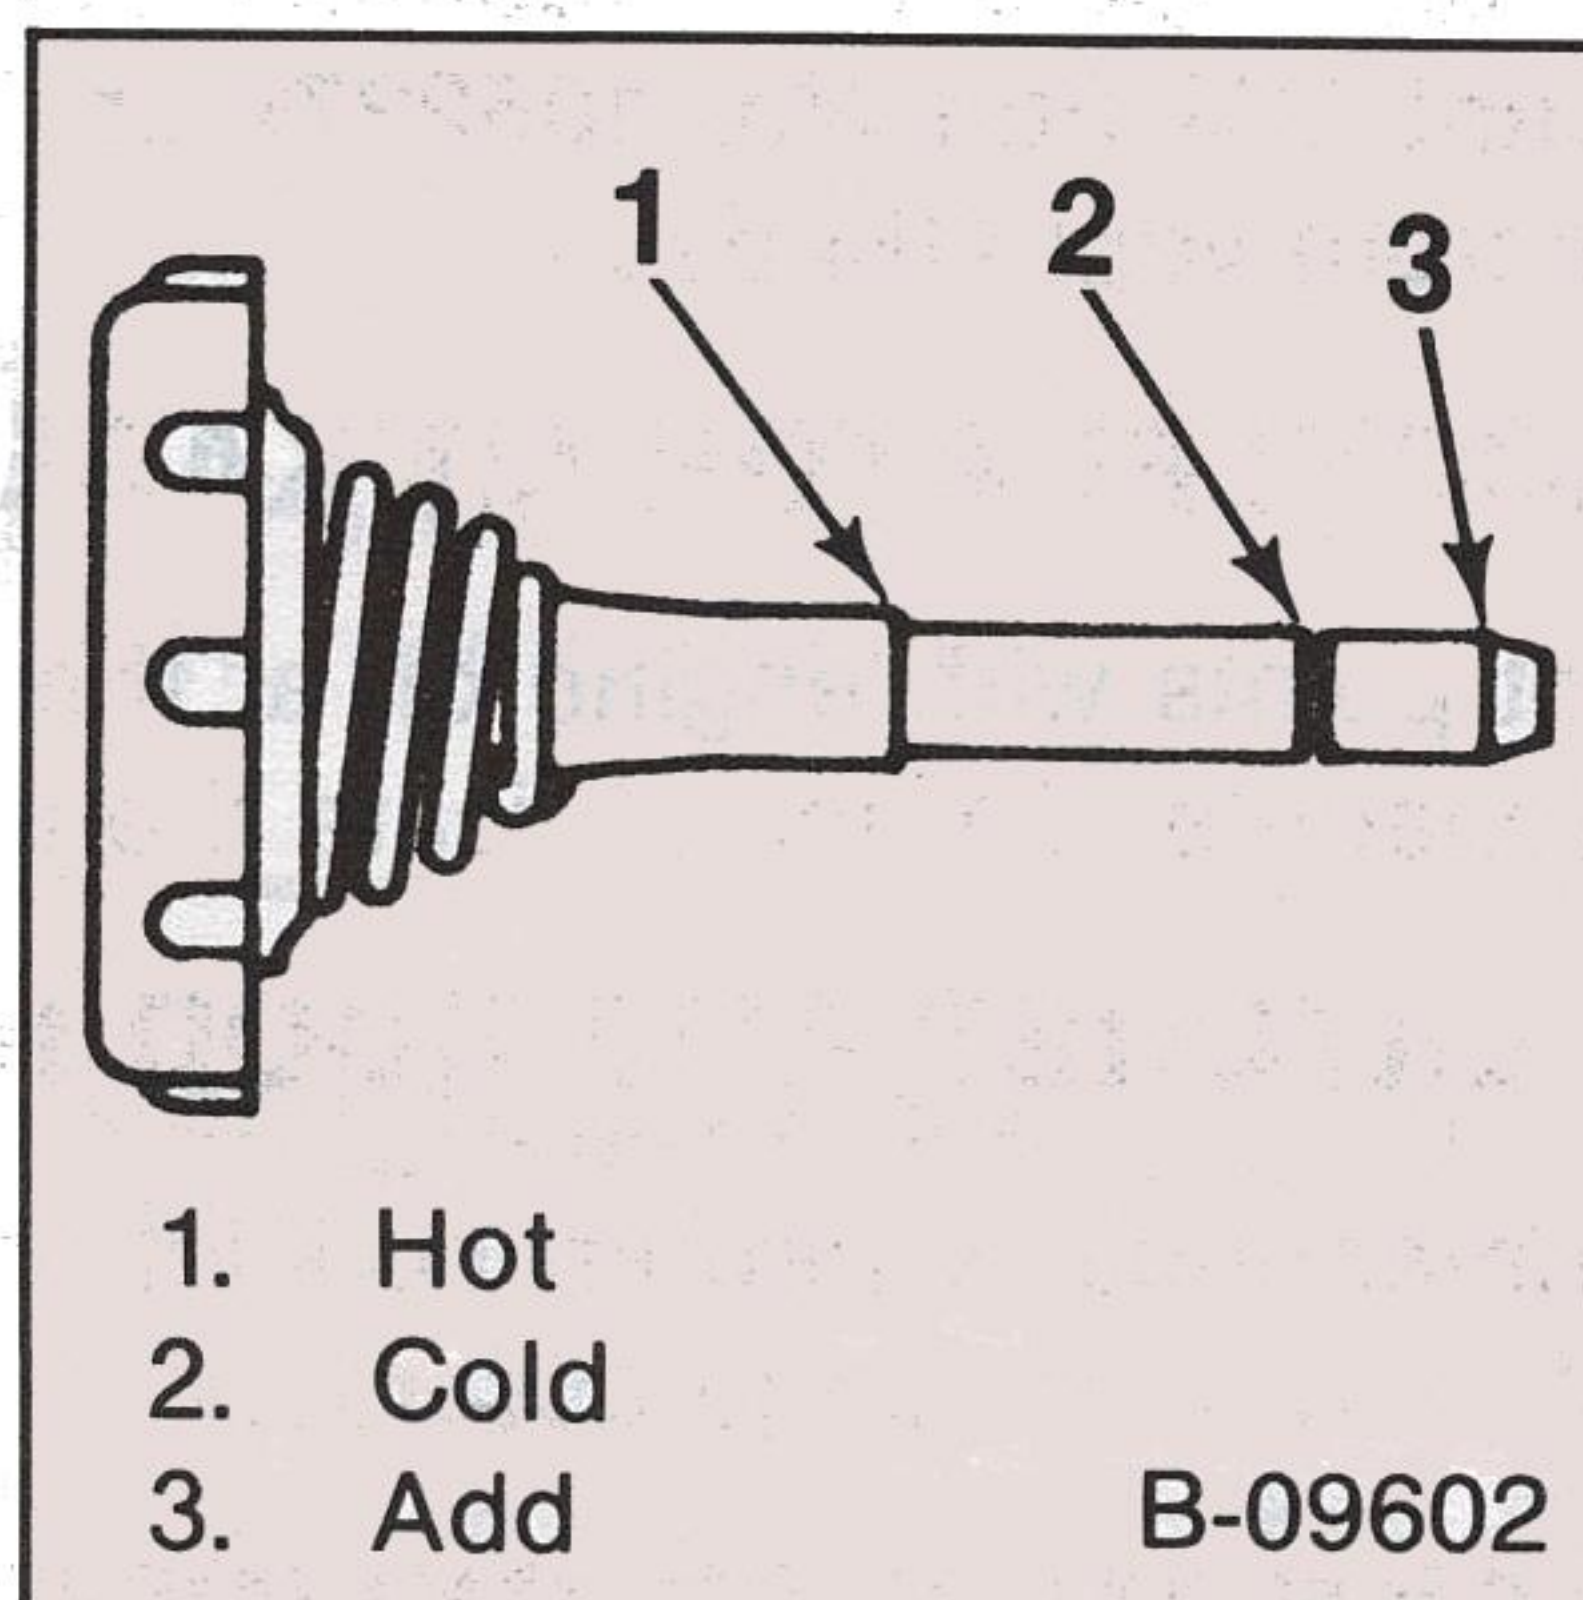

- If the fluid is warmed up (about 66°C or 150°F — hot to the touch), the fluid level should be between the "HOT" and "COLD" marks on the filler cap indicator.

- If cool (about 21 °C or 70°F), the fluid level should be between the “ADD” and “COLD” marks.

This fluid does not need periodic changing.

FRONT SUSPENSION AND STEERING LINKAGE

Lubricate fittings at the interval shown in the Maintenance Schedule with water resistant EP Chassis Lubricant which meets GM Specification 6031M.

NOTICE: Ball joints should not be lubricated unless their temperature is -12°C (10°F), or higher. During cold weather, they should be allowed to warm up as necessary before being lubricated or damage to the ball joint could occur.

FREEDOM BATTERY

WORKING NEAR BATTERY

CAUTION: Follow the precautions listed in the “Jump Starting” Caution (see the “In Case of Emergency” section of this manual) when working on or near the battery. Personal injury (particularly to eyes) or property damage may result from battery explosion, battery acid, or electrical (short circuit) burns.

Your new vehicle has a Delco FREEDOM battery (two FREEDOM batteries with an optional diesel engine). It needs no periodic maintenance. Its top is permanently sealed (except for two small vent holes) and has no filler caps. You will never have to add water.

The hydrometer (test indicator) in the top of the battery provides information for testing purposes only.

If the vehicle is not going to be driven for 30 days or longer, disconnect the cable from the “-” (black) negative terminal of the battery to prevent discharge.

For full power needs at replacement time, a Delco battery with the same catalog number as shown on the original battery's label is recommended.

FRONT WHEEL BEARINGS

Clean and repack front wheel bearings at the intervals shown in the Maintenance Schedule. Due to the weight of the tire and wheel assembly it is recommended that they be removed from hub before lubricating bearings to prevent damage to oil seal. Then remove the front wheel hub to lubricate the bearings. Use wheel bearing lubricant GM Part Number 1051344 or equivalent.

NOTICE: "Long fiber" or "viscous" type lubricant should not be used. Do not mix wheel bearing lubricants. Be sure to thoroughly clean bearings and hubs of all old lubricant before repacking.

Tapered roller bearings used in this vehicle have a slightly loose feel when properly adjusted. They must never be over tightened (preloaded) or severe bearing damage may result. Consult your authorized dealer or service manual for proper detailed adjustment procedures and specifications.

AIR CONDITIONING

Periodically have your dealer check your air conditioning system to be sure there has been no loss in cooling output. See your dealer immediately if you suspect is not performing as it should.

Your vehicle's air conditioning system will not operate below ambient temperatures of approximately 4°C (40°F) regardless of control position.

BODY LUBRICATION

Normal use of a vehicle causes metal-to-metal movement at certain points in the cab or body. Noise, wear and improper operation at these points will result when a protective film of lubricant is not provided.

For exposed surfaces, such as door checks, door lock bolts, lock striker plates, dovetail bumper wedges, etc., apply a thin film of light engine oil.

Where oil holes are provided in body parts a dripless oil can be safely used, but any lubricant should be used sparingly, and after application all excess lubricant should be carefully wiped off.

The seat adjusters and seat track, should be lubricated with water resistant EP chassis lubricant.

There are other points on bodies which may occasionally require lubrication and which are difficult to service. Window regulators and controls are confined in the space between the upholstery and the outside door panel. Easy access to the working parts may be made by removing the trim. Door weatherstrips and rubber hood bumpers should be lightly coated with a rubber lubricant.

PROPELLER SHAFT SLIP JOINT

The propeller shaft slip joint should be lubricated at the interval shown in the Maintenance Schedule, with water resistant EP Chassis lubricant which meets General Motors Specification GM 6031M.

TIRES

CAUTION: To reduce the risk of loss of vehicle control and personal injury:

- Tires must be properly inflated, and your vehicle must not be overloaded (refer to the information on “Inflation Pressure” in this section and “Important Information On Vehicle Loading” in the Introduction Section of this manual.)
- Your vehicle must not be operated at speeds in excess of 85 mph (140 km/h) unless it is equipped with police pursuit tires or equivalent high speed capability tires regardless of the legal speed limit. Be sure to consult a tire dealer to determine if the tires on your vehicle are high speed capability tires before operating your vehicle at such speeds.

For more safety information, see the rest of this “Tires” section.

The tires installed on your vehicle are engineered to provide a proper balance of performance characteristics for normal vehicle

operation. The size of the tires equipped on your vehicle are shown on the Certification Label located on the rear of the driver's door.

This section has some tips on how you can get the most benefit from these tires.

INFLATION PRESSURE

Vehicles having a GVWR (Gross Vehicle Weight Rating) of 3 850 kilograms (8,500 pounds) or less must always be operated at the pressures listed on the rear of the driver's door.

Vehicles with a GVWR greater than 3 850 kilograms (8,500 pounds) must be operated at the highest pressures shown on the driver's door label to obtain the GVWR or Gross Axle Weight Rating (GAWR). However, they can be operated with lower inflation pressures when carrying reduced loads. After finding the load on each tire by weighing the vehicle on a scale, the minimum cold inflation pressures can be found in the Tire and Wheel Load Limit Charts at the end of this section. Some vehicles have this calculated for you for a typical reduced load; if so, it is printed on the label.

Incorrect tire inflation pressures can have adverse effects on tire life and vehicle performance. Air pressure that's too low causes increased tire flexing and heat buildup. This weakens the tire and increases the chance of damage or failure and can result in tire overloading, abnormal tire wear, adverse vehicle handling, and reduced fuel economy. Air pressure that's too high can result in abnormal wear, harsh ride, and can increase the chance of damage from road hazards.

Check tire inflation pressures at least monthly and whenever your vehicle is serviced (including the spare, if so equipped). When possible, check tire inflation pressures when tires are "cold."

- The "cold" tire inflation pressure is the tire pressure when a vehicle has not been driven more than one mile (1.6 kilometers) after sitting for three hours or more. This is the most accurate reading.
- It is normal for tire pressures to increase 30 to 60 kilopascals (4 to 8 pounds per square inch) or more when the tires are hot from driving. If you must set inflation pressures when the tires are not "cold," add 28 kilopascals (4 pounds per square inch) to the cold inflation pressures recommended for the load you are carrying.
- **Passenger-Car-Type* Tires:**

The inflation pressures shown on the Certification Label (located on rear of driver's door) should be used for all speeds up to 75 mph (120 km/h). For sustained driving at speeds of 75 mph to 85 mph

(120 km/h to 140 km/h), where such speeds are allowed by law, cold inflation pressures must be set as shown for your tire size in the chart below. Also maximum axle loads must not exceed either the values shown for your tire size on the chart or the Gross Axle Weight Rating (GAWR) on the Certification Label, whichever is less. If the load shown exceeds the axle rating (see Certification Label) for your vehicle, use the axle rating as the load limit. For speeds faster than 85 mph (140 km/h), follow the Caution at the beginning of this “Tires” section.

PASSENGER-CAR-TYPE TIRE LOAD AND INFLATION PRESSURES FOR SPEEDS OF 75 MPH (120 km/h) TO 85 MPH (140 km/h)

Tire Size	Maximum Axle Load* kg (Lbs.)	Inflation Pressure kPa (psi)
P195/75R15	1162 (2562)	240 (35)
P205/75R15	1262 (2784)	240 (35)
P215/75R15	1372 (3024)	240 (35)
P225/75R15	1480 (3266)	240 (35)
P235/75R15	1600 (3526)	240 (35)

*Maximum axle load must not exceed either the value shown for your tire size on this chart, or the gross axle weight rating (GAWR) on the certification label, whichever is less.

B-09643


• Light Truck-Type* Tires:

For sustained driving at speeds of 65 mph to 74 mph (100 km/h to 120 km/h), where such speeds are allowed by law, cold inflation pressures must be increased 70 kPa (10 psi) above the recommended pressures for the load being carried. Do not exceed the wheel’s maximum inflation pressure shown in the Wheel Code and Limits Chart at the end of this section. Sustained speeds from 65 mph to 74 mph are not permitted when the 70 kPa (10 psi) increase would exceed the wheel’s maximum inflation pressure. For sustained driving at speeds of 75 mph to 85 mph (120 km/h to 140 km/h), where such speeds are allowed by law, reduce axle load capacity by 10% in addition to the steps listed above. For speeds faster than 85 mph (140 km/h) follow the Caution at the beginning of this “Tires” section.

A 70 kPa (10 psi) increase should also be used for special operating conditions, such as carrying slide-in campers. The total increase in inflation pressures, however, must not be more than 70 kPa (10 psi) or exceed the wheel's maximum inflation pressure limit.

*Passenger-car-type tires have a 15 inch or smaller wheel size and have no "LT" designation molded into the sidewall. Light-truck-type tires have "LT" molded into the sidewall near the size designation (example: 7.50R16LT or LT235/85R16) and/or are larger than 15 inches in wheel size.

- For proper inflation pressures when towing trailers, see "Trailer Towing" in Section 2.
- Always use a tire pressure gage when checking inflation pressures. We suggest you purchase a quality pocket-type tire pressure gage to check inflation pressures. Simply looking at the tires to check inflation pressures is not enough, especially with radial tires. Underinflated radial tires may look like correctly inflated radial tires. If the inflation pressure on a tire is often low, have your dealer correct the cause.

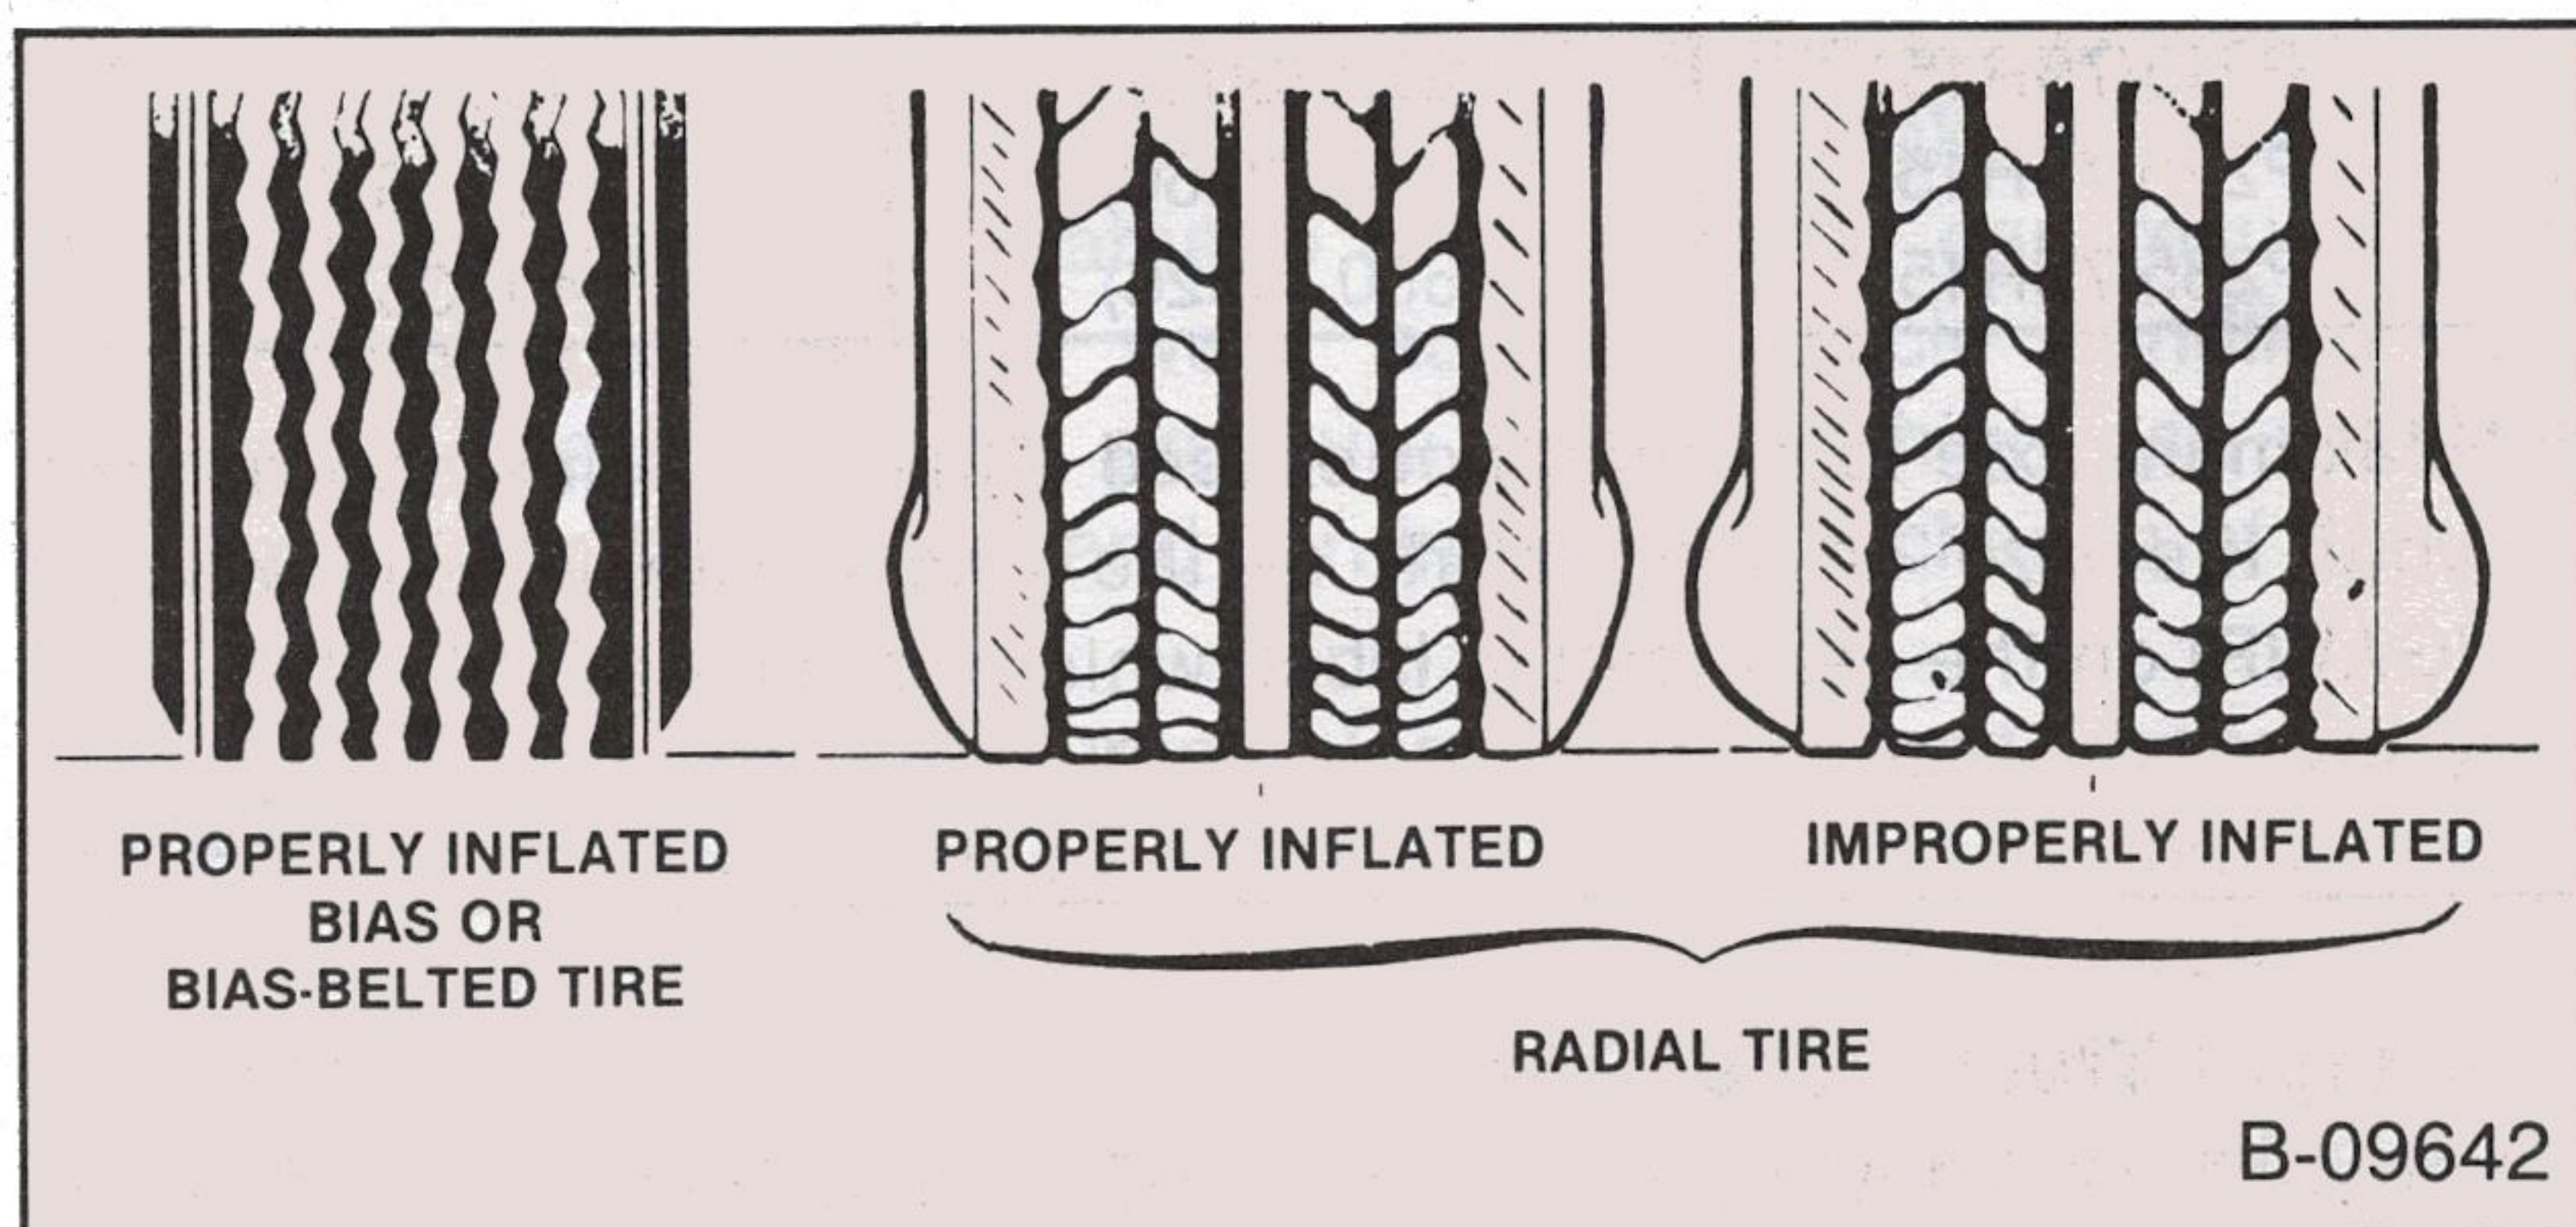

- Be sure to put the tire inflation valve caps or extensions back on, if so equipped. This will help keep dirt and moisture from getting into the valve core which could cause a leak.
- If an air loss occurs while driving, do not drive on the flat tire more than is needed to stop safely. Driving even a short distance on a flat tire can damage a tire and wheel beyond repair.

INSPECTION AND ROTATION


Front and rear tires perform different jobs and can wear differently depending on the types of roads driven, your driving habits, etc. For

longer tire life, you should inspect and rotate your tires at the first 7,500 miles (12 000 kilometers), and every 15,000 miles (25 000 kilometers) thereafter. If your truck has tires with different load ratings between the front and rear, the tires should not be rotated front to rear. Vehicle handling could be adversely affected and the tires having the lower load rating could be overloaded. (See "Important Information on Vehicle Loading" at the beginning of this manual.)

For the longer tire life, any time uneven wear is seen, have the tires checked and rotated by your truck or tire dealer and have the cause of the uneven wear corrected. After rotation, adjust the front and rear tire pressures (see the label on the rear of the driver's door or, if applicable, the "Tire Inflation" charts), and be sure to check wheel nut tightness. See "In Case of Emergency," Section 3 of this manual, for further information.

CAUTION: Whenever a wheel is changed, always remove any corrosion that may be present on the inside of wheel and wheel mounting surface on vehicle.

Installing wheels without good metal-to-metal contact at the mounting surfaces can cause the wheel nuts to loosen, which can allow a wheel to come off while the vehicle is moving, possibly causing loss of control.

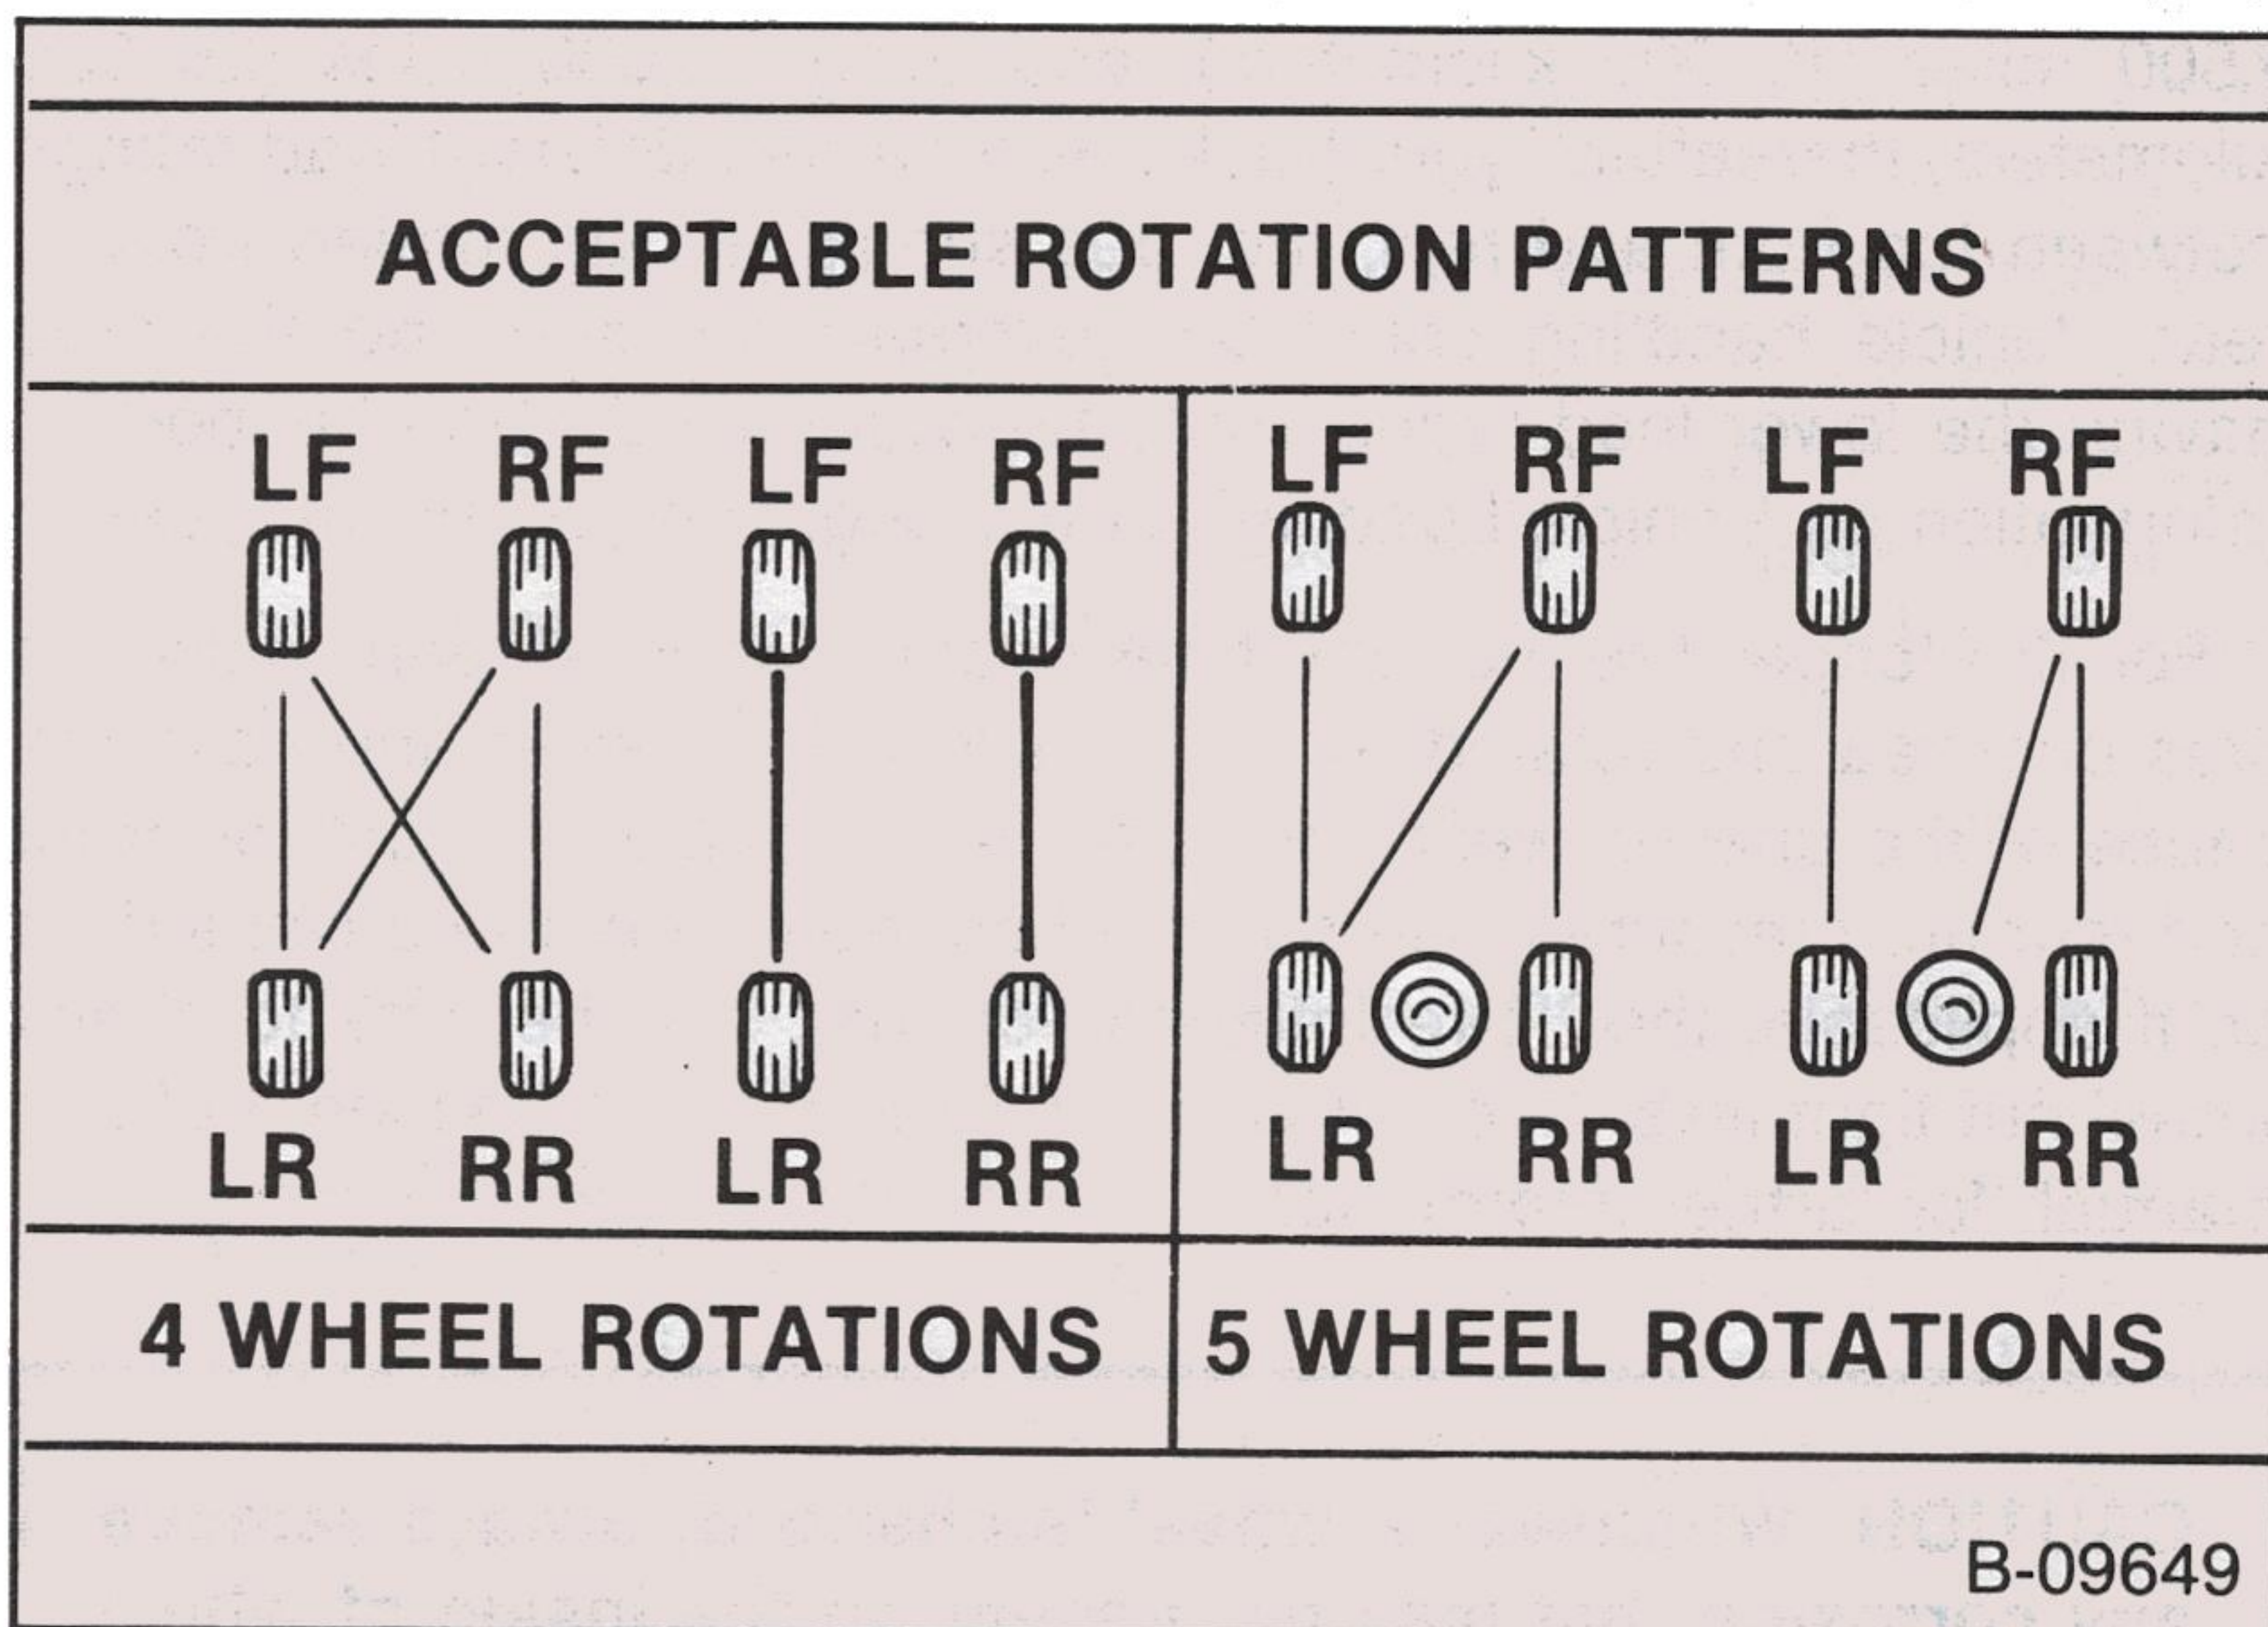

B-09649

DUAL TIRE OPERATION

CAUTION: Be sure to keep tires (including the spare) properly inflated. A tire that is run while seriously underinflated will overheat to the point where the tire may lose air suddenly and/or catch fire, possibly resulting in personal injury and/or property damage.

The outer tire of a pair on dual wheel installations generally wears faster than the inner tire. If this occurs, reverse the position of the tires to equalize wear and get better tire life.

In addition, when trucks are driven continuously on high-crown roads, an increase in air pressure of from 35 kPa (5 psi) to 70 kPa (10 psi) in the outside tire of each dual gives the best tire life. Be sure not to exceed the inflation pressure limits shown in the Tire and Wheel Load Limit Charts. When no longer driving continuously on high-crown roads, decrease air pressure to originally recommended inflation pressure.

ALIGNMENT AND BALANCE

Proper wheel alignment improves tire tread life. Your vehicle's suspension parts should be inspected often and aligned when needed. (See the Maintenance Schedule booklet for more information). Improper alignment will not cause the vehicle to vibrate. However, improper toe alignment will cause the front tires to roll at an angle which will result in faster tire wear. Incorrect caster or camber alignment will cause your front tires to wear unevenly and can cause the vehicle to "pull" to the left or right.

Proper tire balancing provides the best riding comfort and helps reduce tire tread wear. Out-of-balance tires can cause annoying vibration and uneven tire wear such as cupping and flat spots.

TRACTION

Driving, cornering, and braking traction are reduced when water, snow, ice, gravel, or other material is on the road. Adjust driving practices and vehicle speed to the road conditions.

When driving on wet or slushy roads, a wedge of water can build up between the tire and the road. This is known as hydroplaning and may cause partial or complete loss of traction, vehicle control, and stopping ability. To reduce the chance of traction loss, follow these tips:

- Slow down during rainstorms or when roads are slushy.
- Slow down if the road has standing water or puddles.
- Replace the tires when the tread wear indicators are showing.
- Keep the tires properly inflated.

If your vehicle has TPC all season (M & S) radial tires (see "Tire Replacement" in this section), your tires were designed to provide better snow traction. In fact, these tires should be adequate for driving in most winter conditions. However, if you buy conventional snow tires, be sure they are the same size, load range, and construction type (bias, bias-belted, or radial) as your other tires.

TIRE CHAINS AND SIMILAR TRACTION DEVICES

If you buy tire chains, make sure the side chain fasteners are not wider than the side chain links; otherwise, the chain may contact and possibly damage your vehicle.

Use of chains may adversely affect your vehicle's handling. When using chains adjust speed to road conditions, avoid sharp turns and avoid lock-wheel braking.

In addition, to prevent chain damage to your vehicle:

- Install the chains as tightly as possible, and then tighten them again after driving 1/4 to 1/2 mile (0.4 to 0.8 kilometer).

- Do not exceed 45 mph (70 km/h), or the chain manufacturer's speed limitation, if lower.
- Drive in a restrained manner and avoid large bumps, potholes, severe turns and other maneuvers which could cause the tires to bounce up and down.
- Follow any additional instructions of the chain manufacturer.

TIRE REPLACEMENT

CAUTION: Do not mix different tire construction types (such as radial, bias, and bias-belted tires) on your vehicle except in emergencies, because vehicle handling could be affected and may result in loss of control.

Some light truck-type and most passenger-car-type radial tires have a TPC Spec. No. (Tire Performance Criteria Specification Number) molded into the tire sidewall near the tire size marking. This shows that the tire meets rigid size and performance standards which were developed for your vehicle. The TPC Spec. No. assures a proper combination of endurance, load capacity, handling, and traction on wet, dry and snow covered surfaces. When you replace your tires with tires having the same TPC Spec. No., your new tires will be compatible with your vehicle. If you intend to replace your tires with an all season tread design, make sure the TPC Spec. Number has a "MS" (Mud and Snow) following the number.

When replacing tires with those not having a TPC Spec. No., you should use the same size, load range, and construction type (bias, bias-belted, or radial) as the original tires on your vehicle. (See the Certification Label on the rear of the driver's door).

Use of any other size or type tire may affect such things as load carrying capacity, ride, handling, speedometer/odometer calibration, vehicle ground clearance, and tire clearance to the body and chassis. If replacing only a single tire, the new tire should be used on the same axle with the least worn tire.

UNIFORM TIRE QUALITY GRADING

The following information relates to the system developed by the National Highway Traffic Safety Administration which grades tires by treadwear, traction and temperature performance.

TREADWEAR

The treadwear grade is a comparative rating based on the wear

rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and a half (1-1/2) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, any may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

TRACTION — A, B, C

The traction grades, from highest to lowest are: A, B, and C, and they represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

Warning: The traction grade assigned to this tire is based on braking (straight-ahead) traction tests and does not include cornering (turning) traction.

TEMPERATURE — A, B, C

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.


Warning: The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

These grades are molded on the sidewalls of passenger car tires. While the tires available as standard or optional equipment on General Motors vehicles may vary with respect to these grades, all such tires meet General Motors performance standards and have been approved for use on General Motors vehicles. All passenger-car-type tires must conform to Federal safety requirements in addition to these grades.


You should replace your tires when:

- They are worn to a point where 1.6 millimeters (2/32 inch) or less tread remains, or the cord or fabric is showing. To help you

detect this, your tires have built-in tread wear indicators that appear between the tread grooves when the tread depth is 1.6 millimeters (2/32 inch) or less. When the indicators appear in two or more adjacent grooves at three spots around the tire, the tire should be replaced.

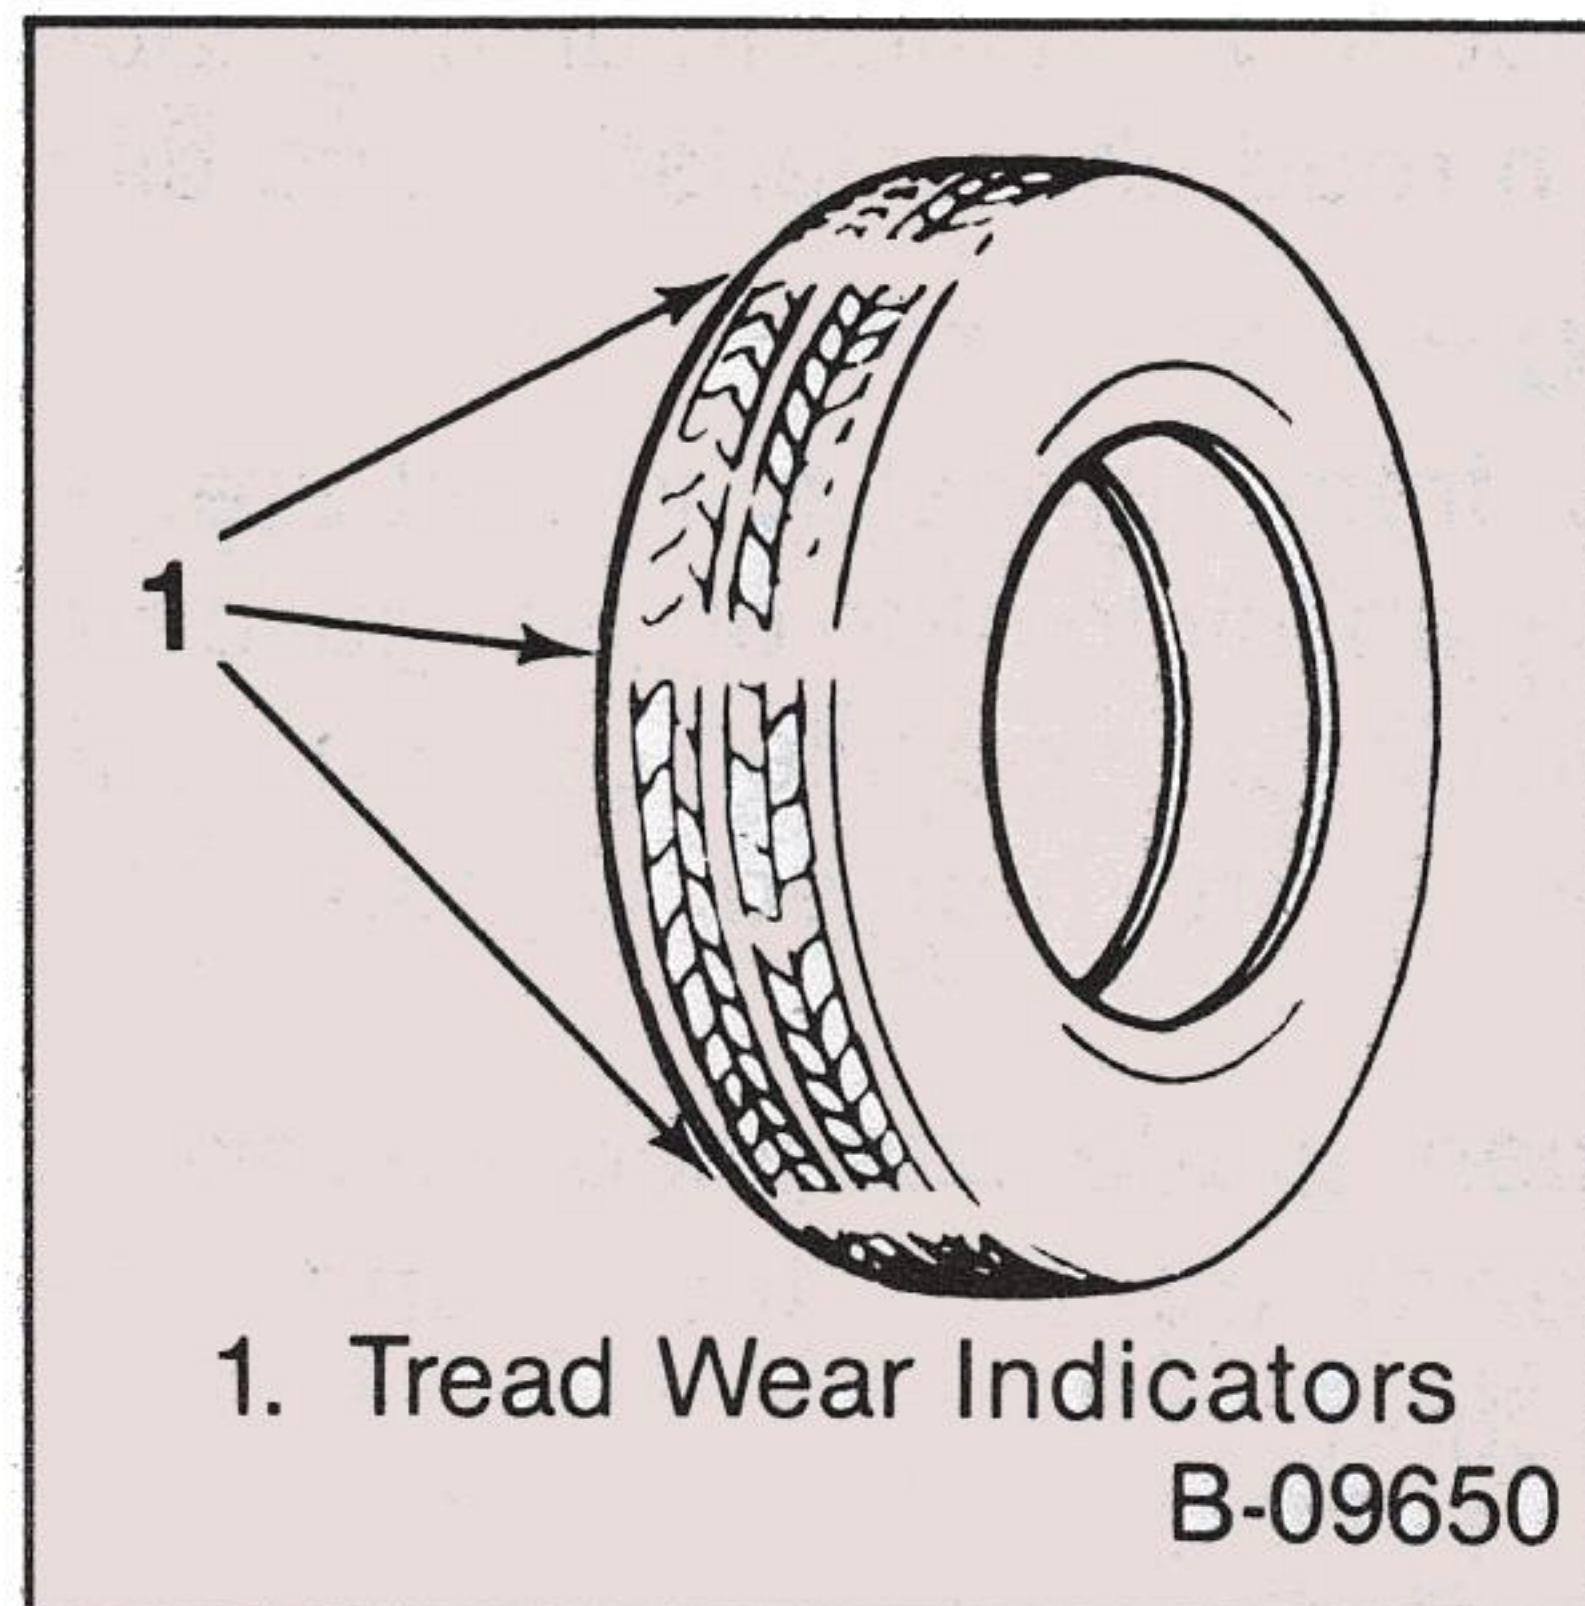

- The tire tread or sidewall is cracked, cut or snagged deep enough to expose the cord or fabric.
- The tire has a bump, bulge or split.
- The tire has a puncture, cut, or other damage that can't be correctly repaired because of the size or location of the damage.

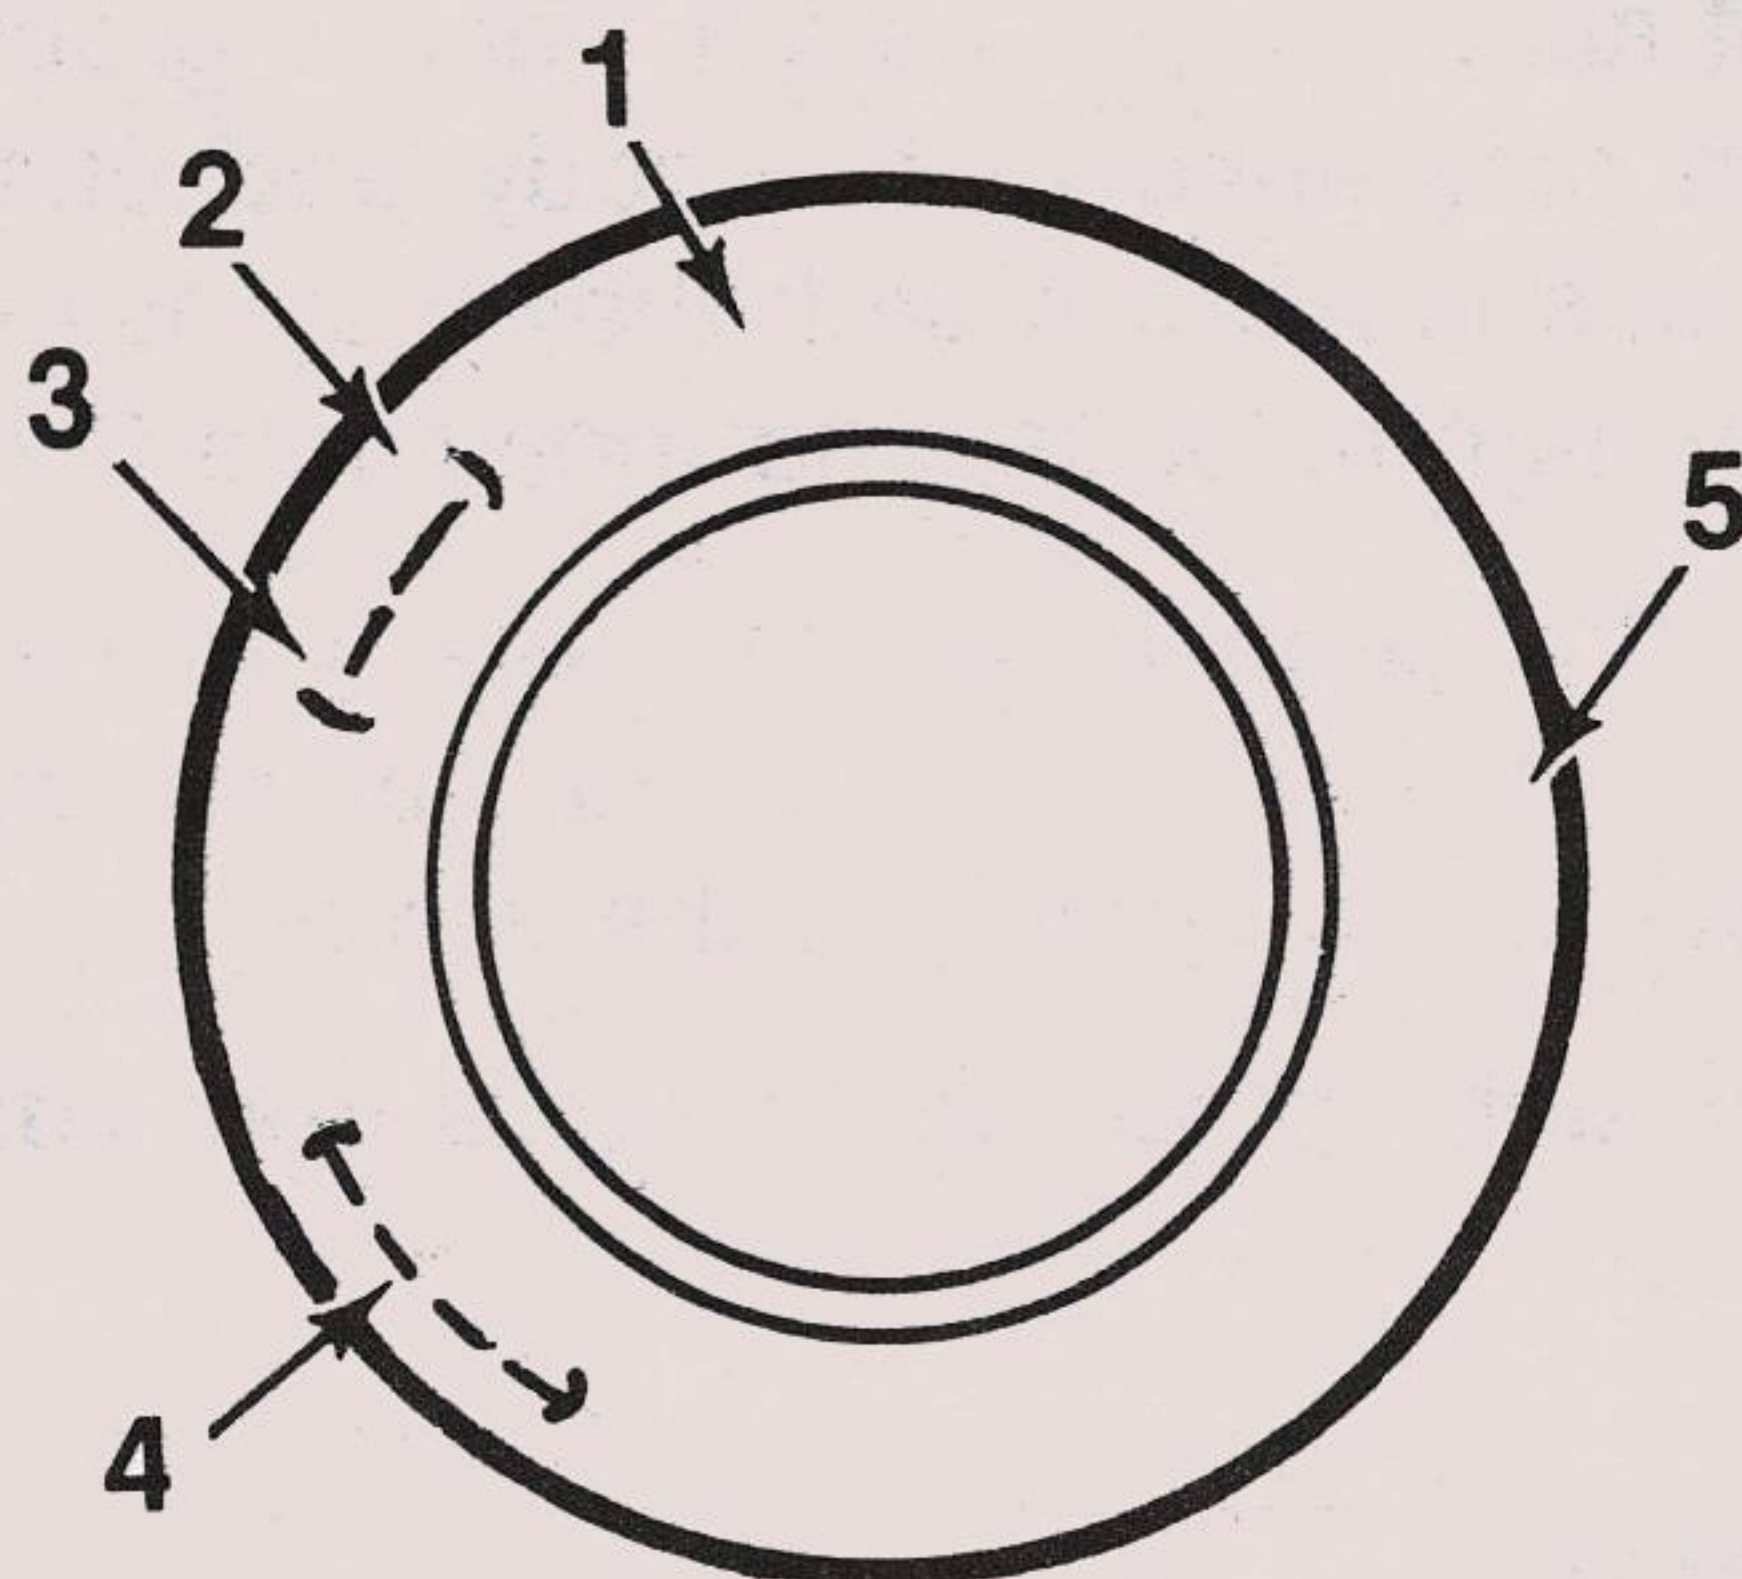

1. Load Range
2. Size
3. TPC Spec. No.
4. Brand Name
5. Construction

B-09851

WHEEL REPLACEMENT

Damaged wheels must be replaced. For example, replace wheels if they are bent, cracked or heavily rusted or if wheel nuts often become loose. Also replace wheels that leak air (except some aluminum wheels which can be repaired — See your GM dealer). See the Caution under “Inspection and Rotation” in this section regarding the importance of obtaining good metal-to-metal contact when replacing or changing wheels.

Do not use bent wheels which have been straightened, and do not use inner tubes in leaking wheels designed for tubeless tires. Such wheels may have structural damage and could fail without warning.

The wheel originally installed on your vehicle will provide optimum life up to the maximum load and inflation pressures shown in the Wheel Code and Limits Chart. Maximum loads, maximum inflation pressures, wheel identification codes, and wheel sizes are stamped on each wheel. Approved wheels are available from your dealer. When obtaining wheels from any other source, the replacement wheels should be equal in load capacity, inflation pressure capacity, diameter, width, offset, and mounting configurations to those originally installed on your vehicle.

A wheel of the wrong size or type may adversely affect such things as load carrying capacity, wheel and bearing life, brake

cooling, speedometer/odometer calibration, stopping ability, headlight aim, bumper height, vehicle ground clearance, and tire or tire chain clearance to the body and chassis. Replacement with used wheels is not advised: they may have been treated harshly or have very high mileage, and they could fail without warning.

The use of wheels and/or tires with higher load-carrying limits than originally equipped on your vehicle does not in itself increase the GAWR or the GVWR of the vehicle.

You can get replacement wheels from your GM dealer.

WARRANTY

Tires are warranted by the tire manufacturer. Warranty information is included in the manufacturer's warranty folder furnished with your vehicle.

TIRE AND WHEEL LOAD LIMIT CHARTS

(Tire and wheel load limits are shown below. Vehicle loading must be limited so that neither the wheel or tire inflation pressure or load limits are exceeded)

Tire Load Limits: Bias Tires Used As Singles — kg (lbs)

Tire Size	Load Range	Inflation Pressure — kPa (PSI)				
		207 (30)	241 (35)	276 (40)	310 (45)	345 (50)
8.00-16.5	C	617 (1 360)	676 (1 490)	730 (1 610)	785 (1 730)	
8.00-16.5	D	617 (1 360)	676 (1 490)	730 (1 610)	785 (1 730)	835 (1 840)
8.75-16.5	D	712 (1 570)	780 (1 720)	839 (1 850)	903 (1 990)	957 (2 110)
8.75-16.5	E	712 (1 570)	780 (1 720)	839 (1 850)	903 (1 990)	957 (2 110)

Tire Load Limits: Bias Tires Used As Duals — kg (lbs)

Tire Size	Load Range	Inflation Pressure — kPa (PSI)				
		207 (30)	241 (35)	276 (40)	310 (45)	345 (50)
8.00-16.5	C	542 (1 195)	594 (1 310)	642 (1 415)	689 (1 520)	
8.00-16.5	D	542 (1 195)	594 (1 310)	642 (1 415)	689 (1 520)	735 (1 620)

Tire Load Limits: Radial Tires Used As Singles — kg (lbs)

Tire Size	Load Range	Inflation Pressure — kPa (PSI)				
		207 (30)	241 (35)	276 (40)	310 (45)	345 (50)
8.75 R16.5	E		712 (1 570)	780 (1 720)	839 (1 850)	903 (1 990)

Wheel Code and Load Limits

Code *	Wheel Size	Max. Load — kg (lbs.)	Max. Pressure — kPa (PSI)
DAS	15 x 6.5	835 (1 843)	282 (41)
GBC	15 x 6.5	835 (1 843)	282 (41)
XH	15 x 6	719 (1 585)	276 (40)

* Wheel code is located on the wheel just to the right of the valve stem hole.

B-09852

Tire Load Limits: Bias Tire Used As Singles — kg (lbs.) (Cont.)

Inflation Pressure — kPa (PSI)					
379 (55)	414 (60)	448 (65)	483 (70)	517 (75)	552 (80)
882 (1 945)	928 (2 045)				
1016 (2 240)	1066 (2 350)				
1016 (2 240)	1066 (2 350)	1120 (2 470)	1166 (2 570)	1216 (2 680)	

Tire Load Limits: Bias Tires Used As Duals — kg (lbs.) (Cont.)

Inflation Pressure — kPa (PSI)					
379 (55)	414 (60)	448 (65)	483 (70)	517 (75)	552 (80)
776 (1 710)	816 (1 800)				

Tire Load Limits: Radial Tires Used As Singles — kg (lbs.) (Cont.)

Inflation Pressure — kPa (PSI)					
379 (55)	414 (60)	448 (65)	483 (70)	517 (75)	552 (80)
957 (2 110)	1016 (2 240)	1066 (2 350)	1120 (2 470)	1166 (2 570)	1216 (2 680)

Wheel Code And Load Limits (Cont.)

Code*	Wheel Size	Max. Load — kg (lbs.)	Max. Pressure — kPa (PSI)
XAH	15 x 6	900 (1 984)	483 (70)
YH	16.5 x 6	1216 (2 680)	586 (85)
XJ	16.5 x 6.75	1216 (2 680)	586 (85)

*Wheel code is located on the wheel just to the right of the valve stem hole.

B-09900

SECTION 6

SPECIFICATIONS

CONTENTS

Capacities.....	6-2
Service Replacement Information.....	6-3
Lamp Bulb Data.....	6-4
Fuses And Circuit Breakers.....	6-5
Identification Numbers.....	6-7
Updated Service Information You Can Obtain.....	6-8

These specifications are given here for information only. Before using them, see the Cautions and other instructions throughout this manual — the index may help you locate such items. For more information, see the service manual covering the chassis or body part in question. Your dealer may also be able to help.

CAPACITIES

ITEMS	METRIC MEASURE	U.S. MEASURE
Cooling System (Approx.)▲ 4.3 L (N) V6 All V8's Except Diesel Without A/C With A/C 6.2 L (C) Diesel With Automatic or Manual Transmission With or w/o A/C 6.2 L (J) Diesel With Automatic or Manual Transmission With or w/o A/C	10.5 Liters 16 Liters 16 Liters 23 Liters 24.2 Liters	11.1 Quarts 17 Quarts 17 Quarts 24 Quarts 25.6 Quarts
Crankcase (Approx.)* All Engines Except Diesel Without Filter With Filter Diesel Engines With Filter†	3.8 Liters 4.8 Liters 6.5 Liters	4 Quarts 5 Quarts 7 Quarts
Fuel Tank (Approx.) Gasoline and Diesel Engines Standard Optional	83 Liters 125 Liters	22 Gallons 33 Gallons

* After refill, fluid level should be checked as outlined under "Service and Maintenance," Section 5 of this manual.

▲ If equipped with Auxiliary Heater add 2.68L/2.84 Qts.

† Oil Filter should be changed at EVERY oil change.

SERVICE PARTS IDENTIFICATION LABEL

The Service Parts Identification Label is provided on all vehicle models. It is located on the inside of the glove box door. The label lists the V.I.N. (vehicle identification number), wheelbase, paint information and all Production options or Special Equipment on the

1986 TRUCK SERVICE REPLACEMENT PART AND FILTER RECOMMENDATIONS

The spark plug information below replaces that which currently appears in Service Replacement Part and Filter Recommendations for gasoline engines in Section 6 of your Owner's Manual.

LIGHT DUTY EMISSION CLASS VEHICLES

Engine Liter (VIN)	Spark Plug
2.5 L (E)	R43CTS
4.3 L (N)	R43TS
4.3 L (Z)	R43TS
5.0 L (H)	R43TS
5.0 L (F)	R43TS
5.7 L (L)	R43TS

HEAVY DUTY EMISSION CLASS VEHICLES

Engine Liter (VIN)	Spark Plug
4.8 L (T)	R44T
5.7 L (M)	R43TS
7.4 L (W)	R44T

vehicle when it was shipped from the factory. Always refer to this information when ordering parts.

REPLACEMENT PARTS

Replacement part numbers listed in this section are based on the latest information available at the time of printing, and are subject to change. If a part listed in this manual is not the same as the part used in your vehicle when it was built, or if you have any questions, please contact your GM dealer or parts supplier. Use a part that is equivalent to the one being replaced.

SERVICE REPLACEMENT PART AND FILTER RECOMMENDATIONS

GASOLINE ENGINES

	Light Duty Emission				Heavy Duty Emission
Engine Liter (VIN)	4.3 (N)	5.0 (F)	5.0 (H)	5.7 (L)	5.7 (M)
Oil Filter	PF51	PF35	PF35	PF35	PF35
Air Cleaner	A178CW	A178CW	A178CW	A178CW	A178CW
PCV Valve	CV789C	CV774C	CV774C	CV774C	CV859C
Crankcase Filter	FB59	FB59	FB59	FB59	FB59
Spark Plugs	R43CTS	R45TS	R45TS	R45TS	R44T

DIESEL ENGINES

Engine Liter (VIN)	6.2 (C)	6.2 (J)
Oil Filter	PF35	PF35
Air Cleaner	A644C	A644C
Fuel Filter	14075347	14075347

LAMP BULB DATA

AC Type Guide Lamps are recommended when replacement becomes necessary.

Lamp Usage	Quantity	Trade #	Power Rating @ 12.8V, Watts
Headlamps	2	6014	50 60
	2	6052 (Opt.)	55 65
	2	H6054 (Opt.)	35 65
			Candle Power
Dome Lamps	2	211-2	12
Oil Pressure Indicator Lamp	1	161	1
Generator Indicator Lamp	1	194	2
Instrument Cluster Lamps	5	194	2
Instrument Cluster Illum ²	1	161	1
Headlamp Beam Indicator Lamp	1	194	2
Park, Signal Lamp Asm.	2	2057NA	1.5-24 ▲
Tail, Stop Lamps	2	2057	2-32 ▲
License Lamp	1	67	4
Temperature Indicator Lamp	1	194	2
Directional Indicator	2	194	2
Marker Lamps	4	168	3
Brake Warning Indicator Lamp	1	194	2
Back-up Lamp	2	1156	32
Radio Dial Lamp	1	1893	2
Heater or A/C Control	1	194	2
Transmission Indicator Dial With Tilt Wheel and Auto. Trans.	1	1445	0.7
Transmission Indicator Dial	1	73	0.3
Choke Heater Indicator ¹	1	194	2
Stepwell Lamp	2	212-1	6
Reading Lamp	2	906	6
Seat Belt Warning	2	194	2
Glow Plugs Lamp (Diesel)	1	194	2
Water In Fuel Lamp (Diesel)	1	194	2
Low Coolant Lamp (Diesel)	1	194	2

1 With gages only.

2 Only with telltale cluster.

▲ Double filament bulb.

FUSES AND CIRCUIT BREAKERS

Name	Circuits Protected	Fuse	Circuit Breaker
Inst. Lps.	Instrument Cluster Panel Lamps, Radio Dial Lamp, Heater Lamp, Audio Alarm	5 Amp	30 Amp
Pwr. Acc.	Power Door Locks		
Horn/DM	Horn Relay, Theft Deterrent	20 Amp	
	Cigarette Lighter, Dome Lamps		
Gages	Audio Alarm, Instrument Cluster	20 Amp	
	Gages, Brake Switch, Cruise Control		
Aux. Htr./A/C	Auxiliary Heater and Air Conditioning	25 Amp	
Stop-Haz	Stop Hazard Flasher, Audio Alarm	20 Amp	
Tail Lps.	Tail Lamps, Head Lamps	20 Amp	
Turn-B/U	Turn Signals and Backup Flashers	20 Amp	
Htr./A/C	Heater and Air Conditioning	20 Amp	
Radio	Radio	10 Amp	
ECM B	Electronic Control Module	10 Amp	
ECM I	Electronic Control Module	10 Amp	
Pwr. Wdo.	Power Window		30 Amp
Wiper	Windshield Wiper	25 Amp	
Choke	Oil Pressure Switch	20 Amp	

FUSES—CIRCUIT BREAKERS

Electrical components are protected from short circuits by a combination of fuses, circuit breakers, and fusible thermal links in the wiring. This greatly reduces the hazard of electrically caused fires in the vehicle.

The headlight wiring is protected by a circuit breaker in the light switch. An electrical overload will cause the lights to go on and off, or in some cases to remain off. If this happens, have your headlight wiring checked right away.


The windshield wiper motor is protected by a circuit breaker in addition to a fuse. If the motor overheats, due to overloading caused by heavy snow, etc., the wiper will remain stopped until the motor cools. Be sure to have the cause of the overloading corrected.

“ADD ON” ELECTRICAL EQUIPMENT

The electrical system in your vehicle is designed to perform under expected operating conditions without interference between

components. Before any electrical equipment is installed after you purchase your vehicle, please consult your dealer. Certain electrical equipment or the way in which it is installed may adversely affect vehicle operation, such as the performance of the engine, driver information, entertainment and electrical charging systems. GM assumes no responsibility for any expense which you may incur or for any adverse effect upon your vehicle or any of its components or systems which may result from the installation of additional electrical equipment which is not supplied or recommended for installation by GM.

The Fuse Panel is located beneath the I.P. on the driver's side.

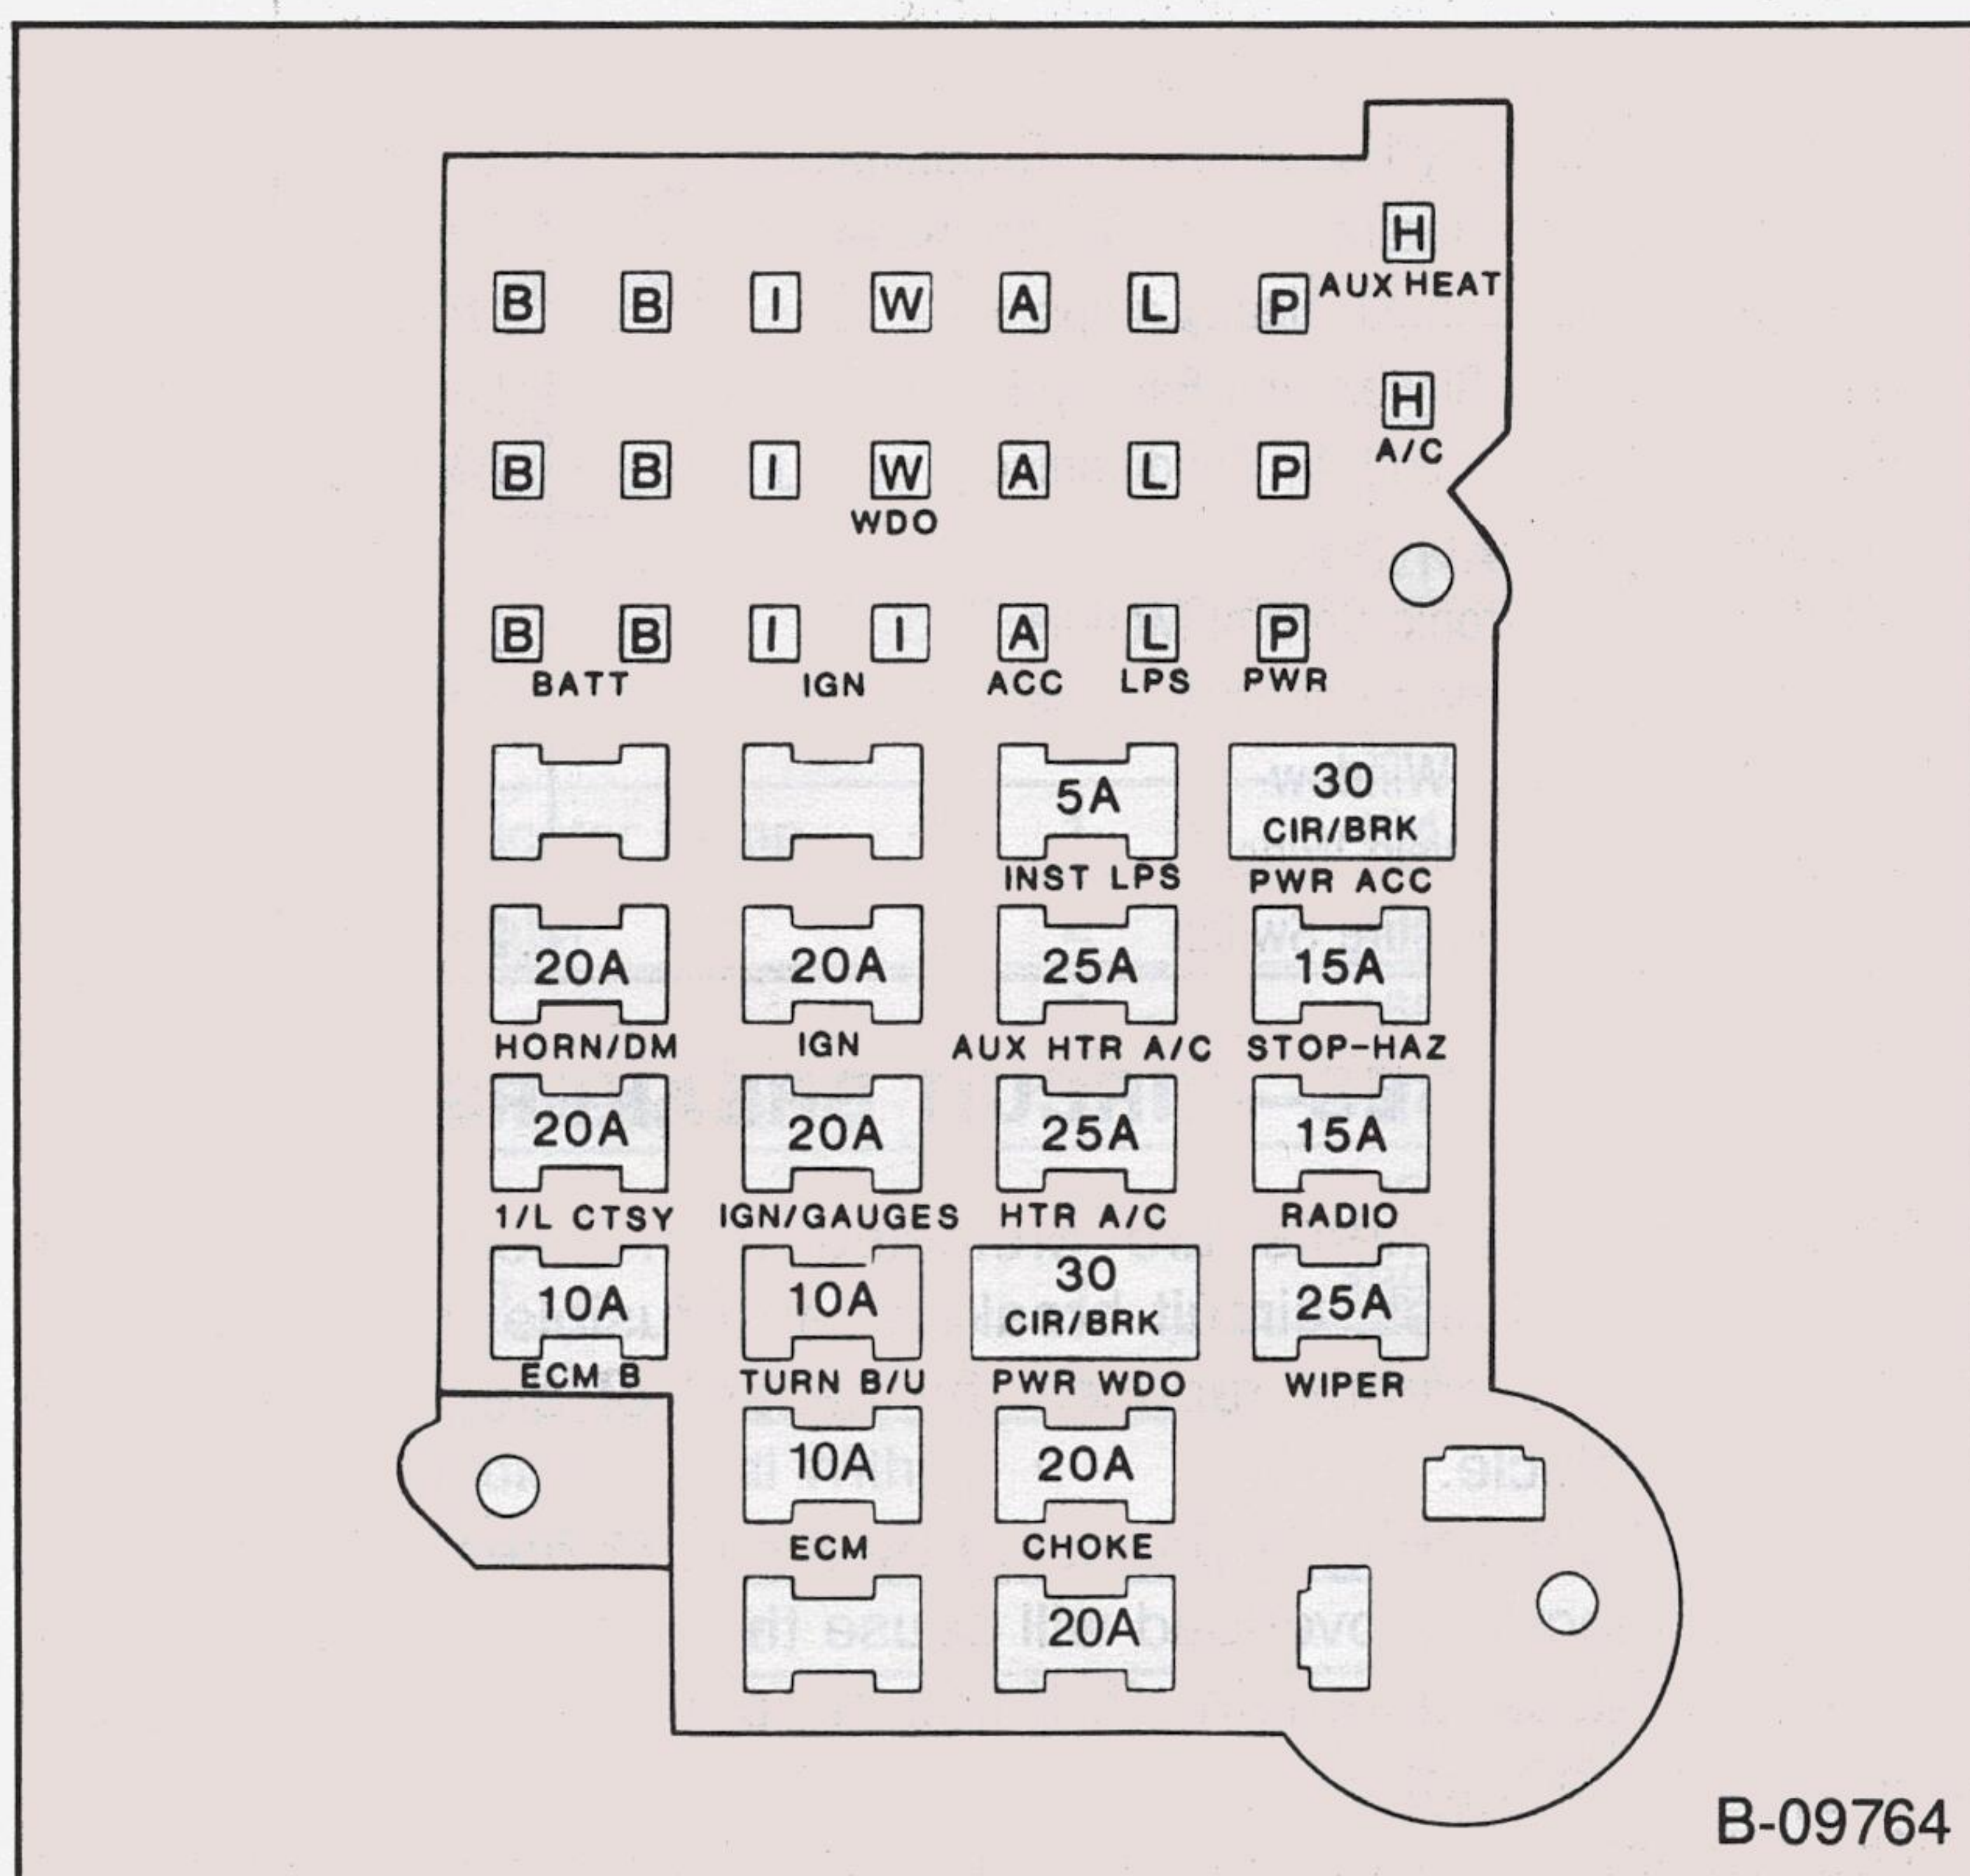


Do not use fuses of higher amperage rating than those recommended above.

The following wiring harnesses are protected by a "fusible link" which is a special wire incorporated in the circuit; ignition, and headlamp hi-beam indicator circuits. Should an electrical overload occur, this wire will fail and prevent damage to the major harness.

IDENTIFICATION NUMBERS

VEHICLE IDENTIFICATION NUMBER (VIN)

This is the legal identifier for your vehicle. It appears on a plate attached to the left top of the instrument panel. This plate can be seen easily through the windshield from outside your vehicle (see illustration). The VIN also appears on the certificates of Title and Registration. Refer to Section 0 for more information on the Vehicle Identification Number.

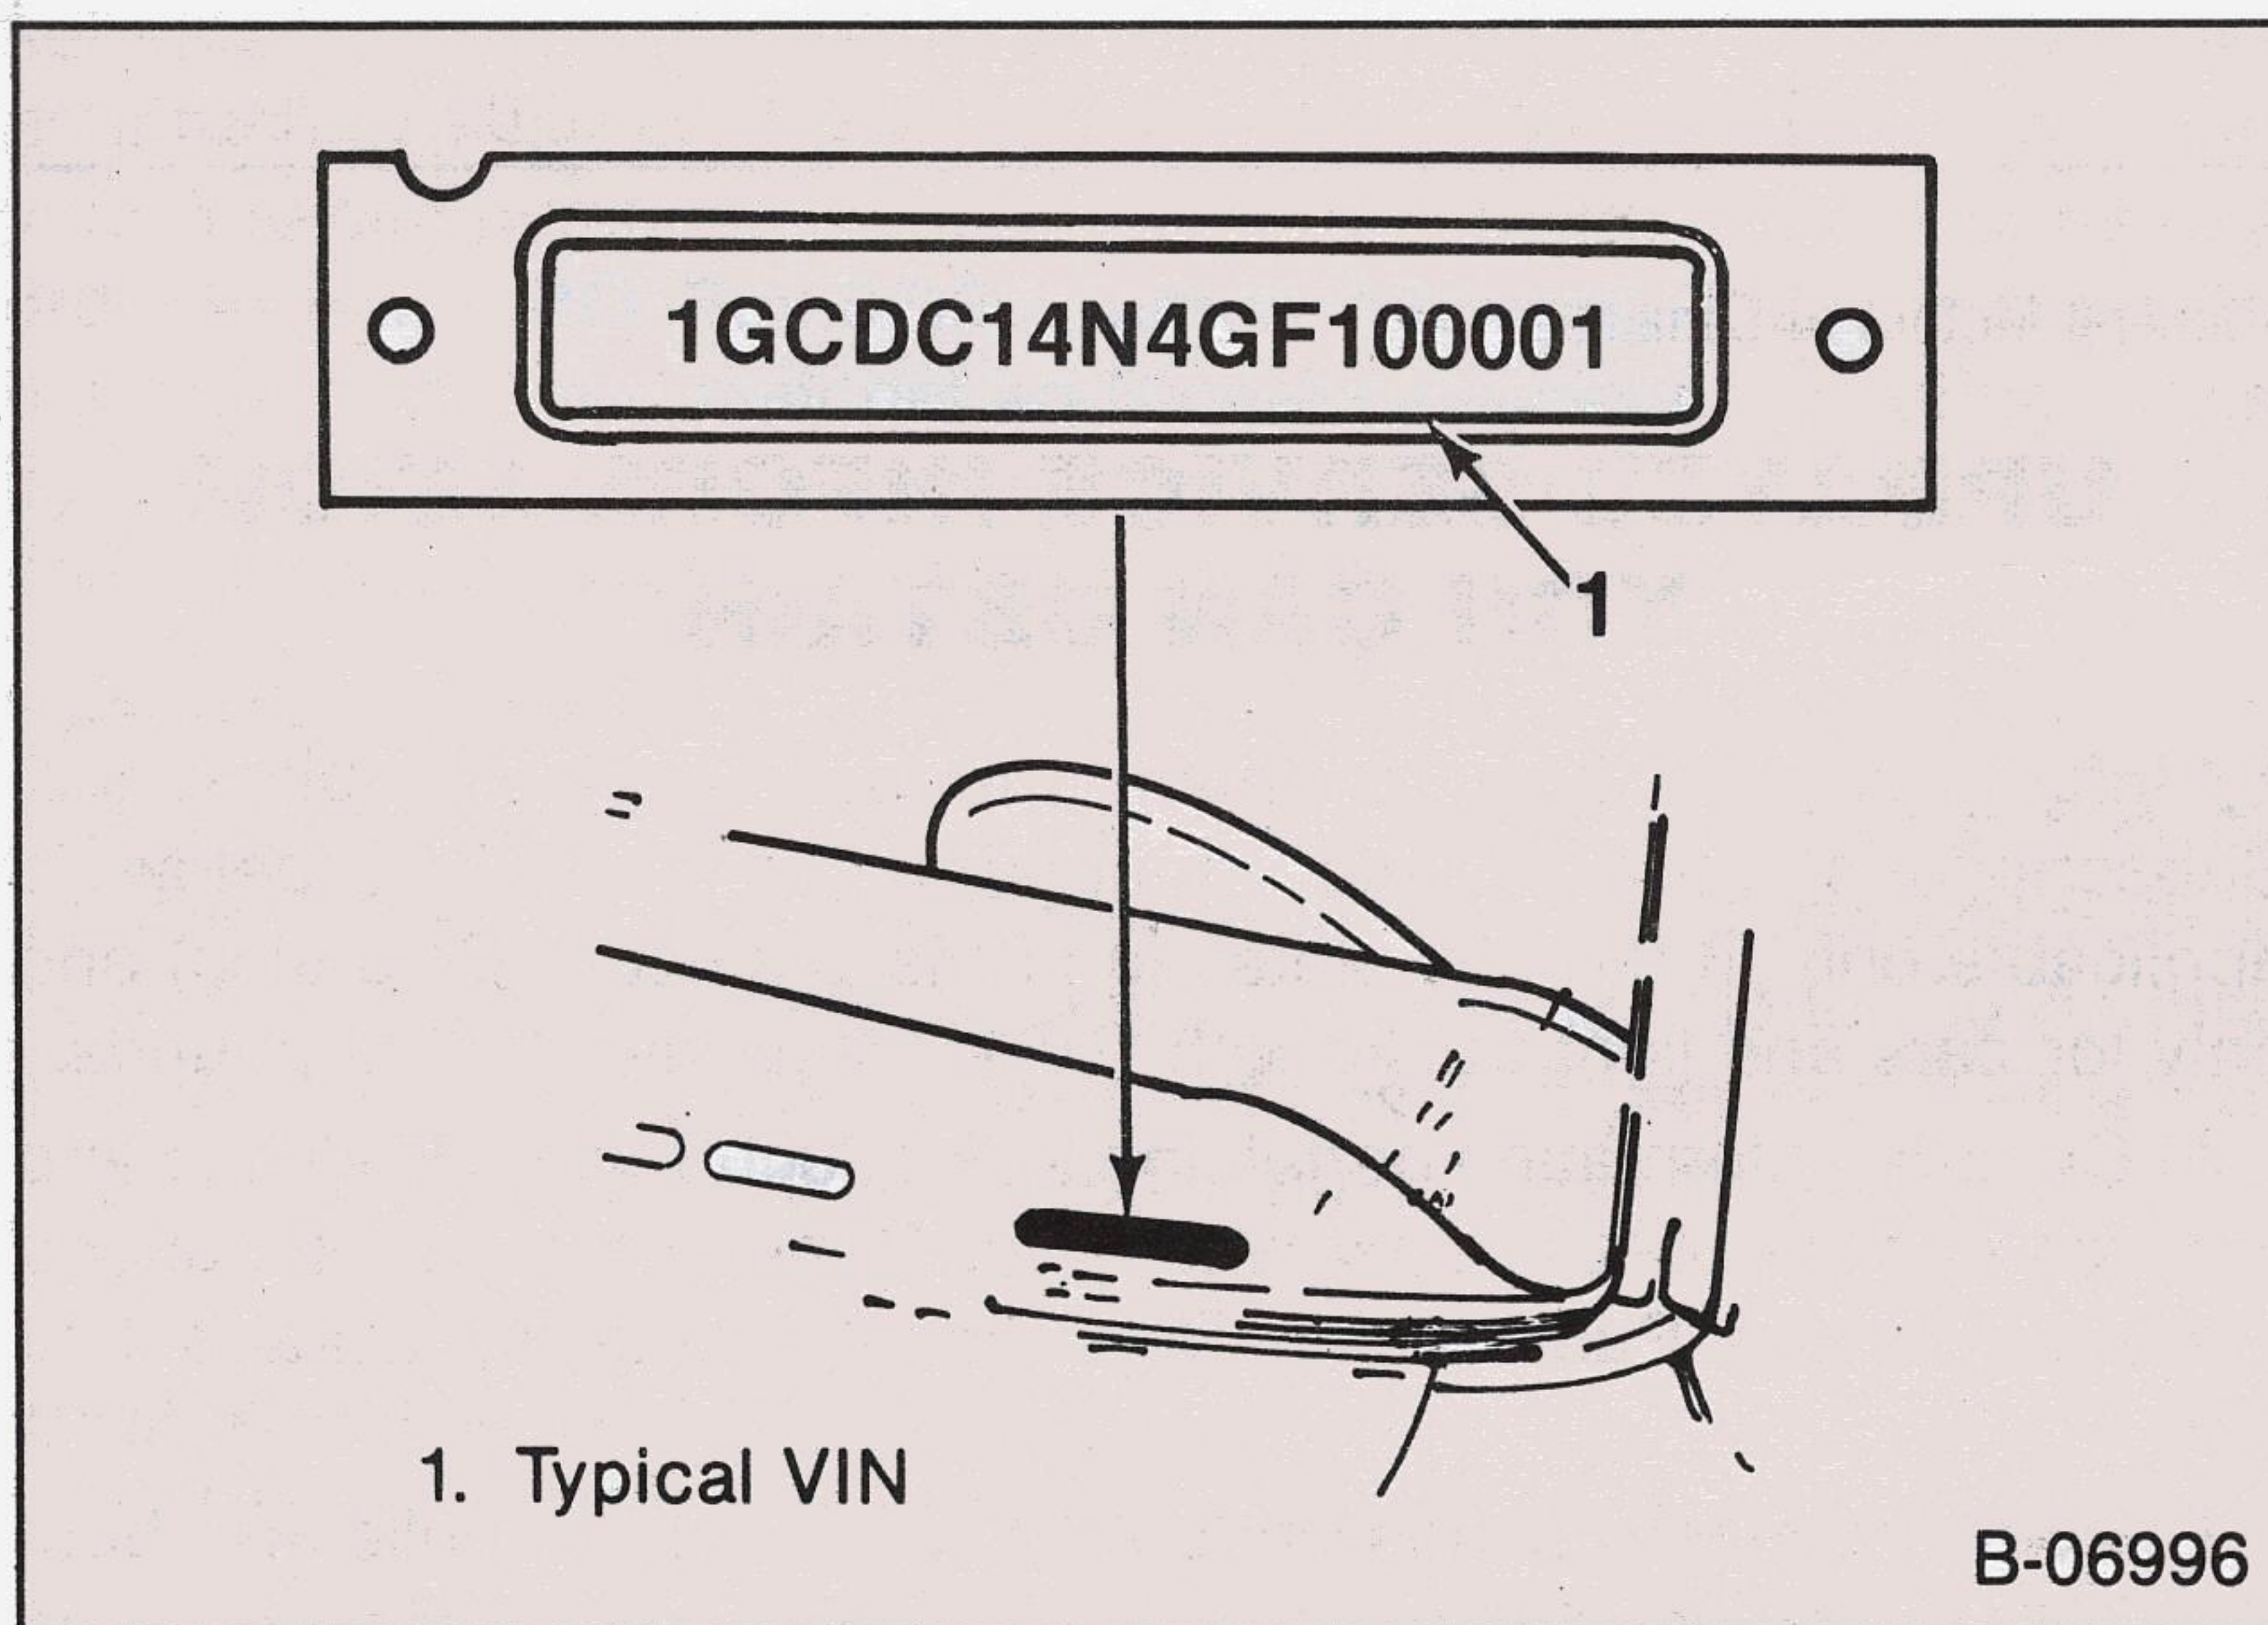

ENGINE IDENTIFICATION

You can identify your 1986 GM engine from the Vehicle Identification Number. The eighth character of the VIN is the Engine Code. See the Engine Code Identification chart below. Some information in this manual may refer to the Engine Code. For example, a 5.7 Liter V-8 engine may be referred to as a 5.7 Liter (Engine Code L) V8 engine.

1986 ENGINE CODE DESCRIPTION

VIN Engine Code	ENGINE DESCRIPTION			Produced in GM Plant Operated By:
	Liter Displacement	Type	Fuel System	
N	4.3	V6	4 Bbl.	Chevrolet Motor
L	5.7	V8	4 Bbl.	Chevrolet Motor*
M	5.7	V8	4 Bbl.	Chevrolet Motor*
F	5.0	V8	4 Bbl.	Chevrolet Motor
H	5.0	V8	4 Bbl.	Chevrolet Motor*
C	6.2	V8	Diesel	Det. Diesel Allison
J	6.2	V8	Diesel	Det. Diesel Allison

*General Motors of Canada

UPDATED SERVICE INFORMATION YOU CAN OBTAIN * *

* * Information on how to obtain Product Service Publications, Subscriptions, Indexes and Summaries as described below is applicable only in the fifty states (and the District of Columbia) and only for cars and light trucks with GVWR less than 10,000 pounds.

In Canada, information pertaining to Product Service Bulletins and Indexes can be obtained by writing to: General Motors of Canada Limited, Service Publications Department, Oshawa, Ontario L1J 5Z6.

Chevrolet regularly sends its dealers useful service bulletins about Chevrolet products. Chevrolet monitors product performance in the field. We then prepare bulletins for servicing our products better. Now, you can get these bulletins, too.

Bulletins cover various subjects. Some pertain to the proper use and care of your vehicle. Some describe costly repairs. Others describe inexpensive repairs which, if done timely, with the latest parts, may avoid future costly repairs. Some bulletins tell a mechanic how to repair a new or unexpected condition. Others describe a quicker way to fix your vehicle. They can help a mechanic service your vehicle better.

Most bulletins apply to conditions affecting a small number of vehicles. Your Chevrolet dealer or a qualified mechanic may have to determine if a specific bulletin applies to your vehicle.

You can subscribe to all Chevrolet bulletins. This way you'll get them as they come out. You can wait a while and get an index to the bulletins. The index summarizes some of the more important bulletins. You can also get individual bulletins. However, you'll need the index to identify them.

SUBSCRIPTIONS

You can subscribe to all Chevrolet Product Service Publications (PSP's). This will include bulletins for all of the vehicles sold by Chevrolet and will not be limited to the PSP's applicable to any particular model. When you buy a subscription, you will receive the PSP's in periodic mailings, shortly after they come out. A subscription costs \$90.00 (\$100.00 includes special binder) and entitles you to all the PSP's published by Chevrolet during the model year. You can purchase a subscription by sending a check or money order to Helm, P.O. Box 07130, Detroit, Michigan 48207, along with the order form. You may get additional subscription ordering forms by calling the toll-free number listed on the following page, or you can find them at participating dealerships.

INDIVIDUAL PSP'S

If you don't want to buy all the PSP's issued by Chevrolet for all vehicle models in the model year, you can buy individual PSP's, such as those which may pertain to a particular model. To do this, you will first need to see our index of PSP's. It provides a variety of information. Here's what you'll find in the index and how you can get one:

What You'll Find In The Index:

- A list of all PSP's published by Chevrolet in a model year (1983 or later). PSP's covering all models of Chevrolet trucks are listed in the same index.
- Ordering information so you can buy the specific PSP's you may want.
- Price information for the PSP's you may want to buy.
- Easy-to-understand summaries of some of the more important PSP's. These summaries highlight some of the PSP's which describe costly repairs or which are designed to prevent costly repairs, or which contain owner use and care information.

How You Can Get An Index:

Indexes are published quarterly each model year, and each quarterly issue is updated cumulatively for that model year. Most of the PSP's which could potentially apply to the most recent Chevrolet

models will be listed in the last quarterly publication for that model year. This means you may want to wait until the end of the model year before ordering an index, if you are interested in buying PSP's pertaining to a current model year vehicle.

Some PSP's pertaining to a particular model year vehicle may be published in later years, and these would be listed in the later year's index. When you order an index for a model year that is not over yet, we'll send you the most recently published quarterly issue. You can specify an index for an earlier model year, but not before 1983.

Cut out the ordering form, fill it out, and mail it in. We will then see to it that an index is mailed to you. There is no charge for indexes for the 1983-1986 model years.

TOLL-FREE TELEPHONE NUMBER

If you want an additional ordering form for an index or a subscription, just call toll-free and we'll be happy to send you one. Automated recording equipment will take your name and mailing address. The number to call is 1-800-551-4123.

COPIES AT PARTICIPATING DEALERS

Copies of Indexes and individual PSP's are at participating Chevrolet dealer. You can ask to see them.

A very important reminder: These PSP's are meant for mechanics. They are not meant for the "do-it-yourselfer". Mechanics have the equipment, tools, safety instructions, and know-how to do a job quickly and safely.


SECTION 7

SERVICE STATION INFORMATION

Refer to "Service and Maintenance," Section 5, for Further Details.

ENGINE COVER REMOVAL

Your 1986 Van can be serviced much the same as conventional passenger cars by raising the hood of the vehicle to check the radiator, battery, engine oil, drive belts, automatic transmission fluid level, windshield washer reservoir, etc. Servicing the air cleaner or distributor requires removal of the engine cover inside of the vehicle which is retained by (6) bolts and (2) clamps.

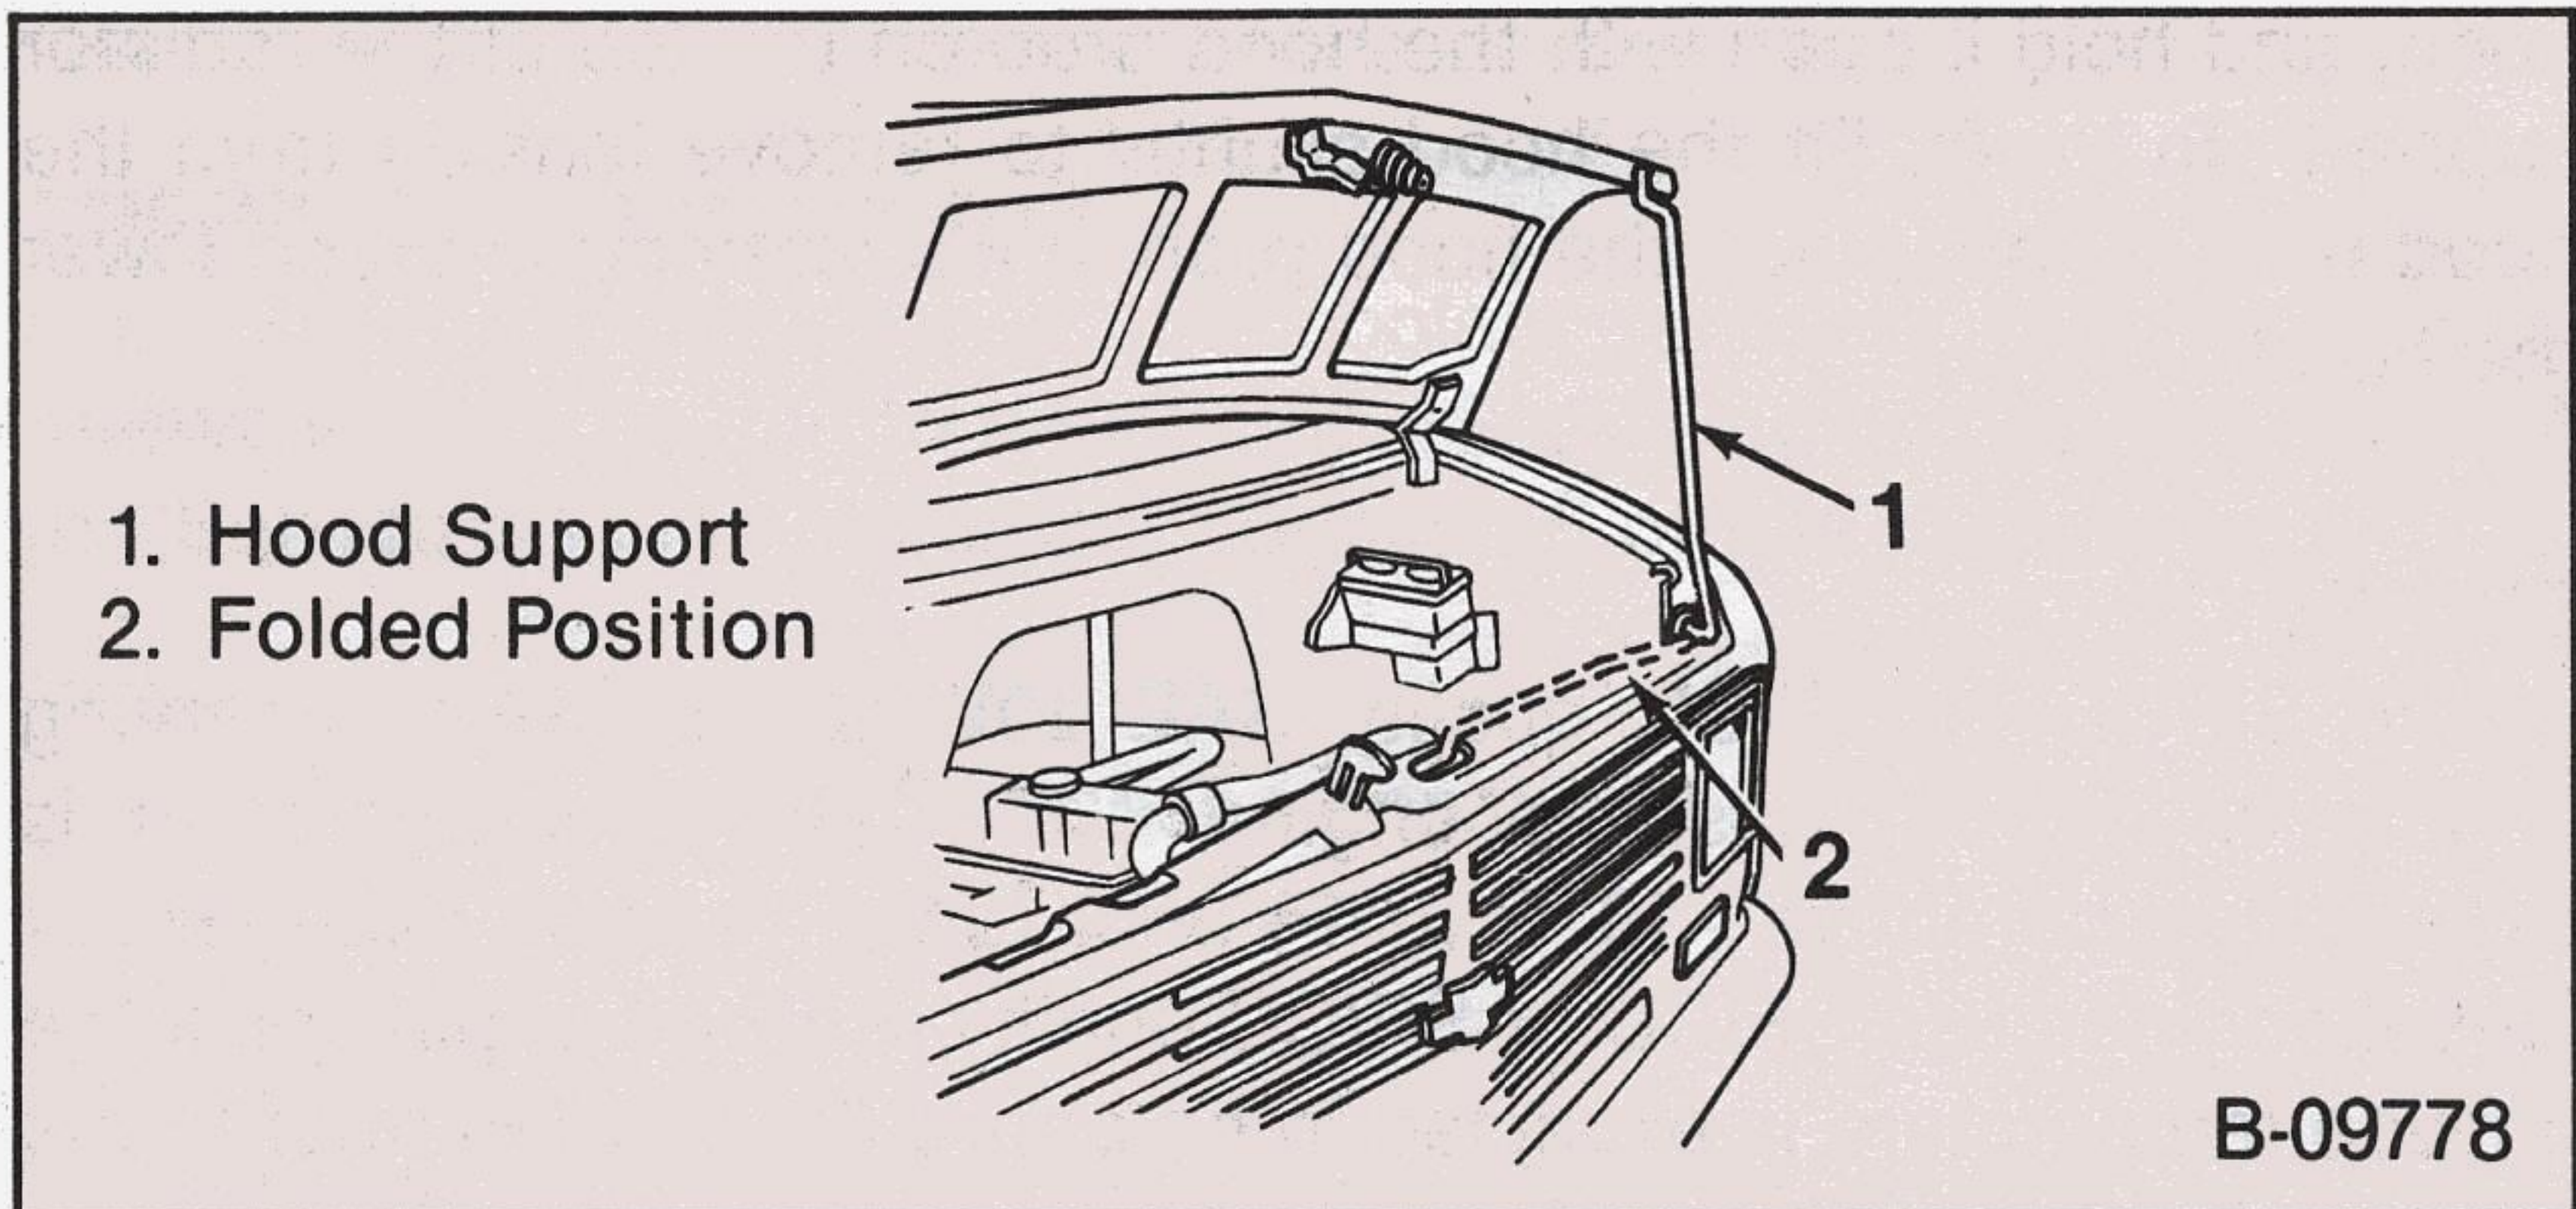

FUEL

FUEL CAP

Located on the left rear quarter panel.

To remove the fuel cap, refer to fuel cap removal procedure in "Service and Maintenance," Section 5 of this manual.

FUEL REQUIREMENTS (GASOLINE ENGINES)

Light Duty Emission Class vehicles use unleaded gasoline. Refer to "Fuel Requirements (Gasoline Engines)" in "Starting and Operating," Section 2 of this manual.

Heavy Duty Emission Class vehicles are certified to meet all applicable emission requirements on regular grade leaded gasoline. Refer to "Fuel Requirements" in "Starting and Operating," Section 2 of this manual.

FUEL REQUIREMENTS (DIESEL ENGINES)

Use only Number 2-D or Number 1-D diesel fuel. If you expect temperatures above -7°C (20°F), use Number 2-D. If you expect temperatures below -7°C (20°F), use a "winterized" blend of Number 2-D, or use Number 1-D. (Refer to "Diesel Fuel Requirements and Fuel System" in Section 2.)


HOOD RELEASE

The hood release handle is on the right side of the instrument panel. To open, pull the handle to release the hood lock. Then, push down slightly on the hood while lifting the underhood lever, raise the hood, and hold it open with the hood prop on the top of the radiator support. To lower, lift the hood slightly to remove tension from the hood prop. Then, place the hood prop in its retaining clip and lower the hood.

ENGINE OIL

Use SF/CD or SF/CC quality SAE 10W-30, Energy-Conserving engine oil in your gasoline engine if the outside temperature is expected to be above -18°C (0°F) prior to the next oil change. For diesel engines use SF/CD or SF/CC quality, SAE 30 engine oil if the outside temperature is expected to be above 0°C (32°F) prior to the next oil change.

For other expected outside temperatures and additional important information on engine oil see "Engine Oil and Filter Recommendations" in Section 5 of this manual for the recommended viscosity grade. Add oil as needed to maintain the proper level within the operating range shown on the dipstick.

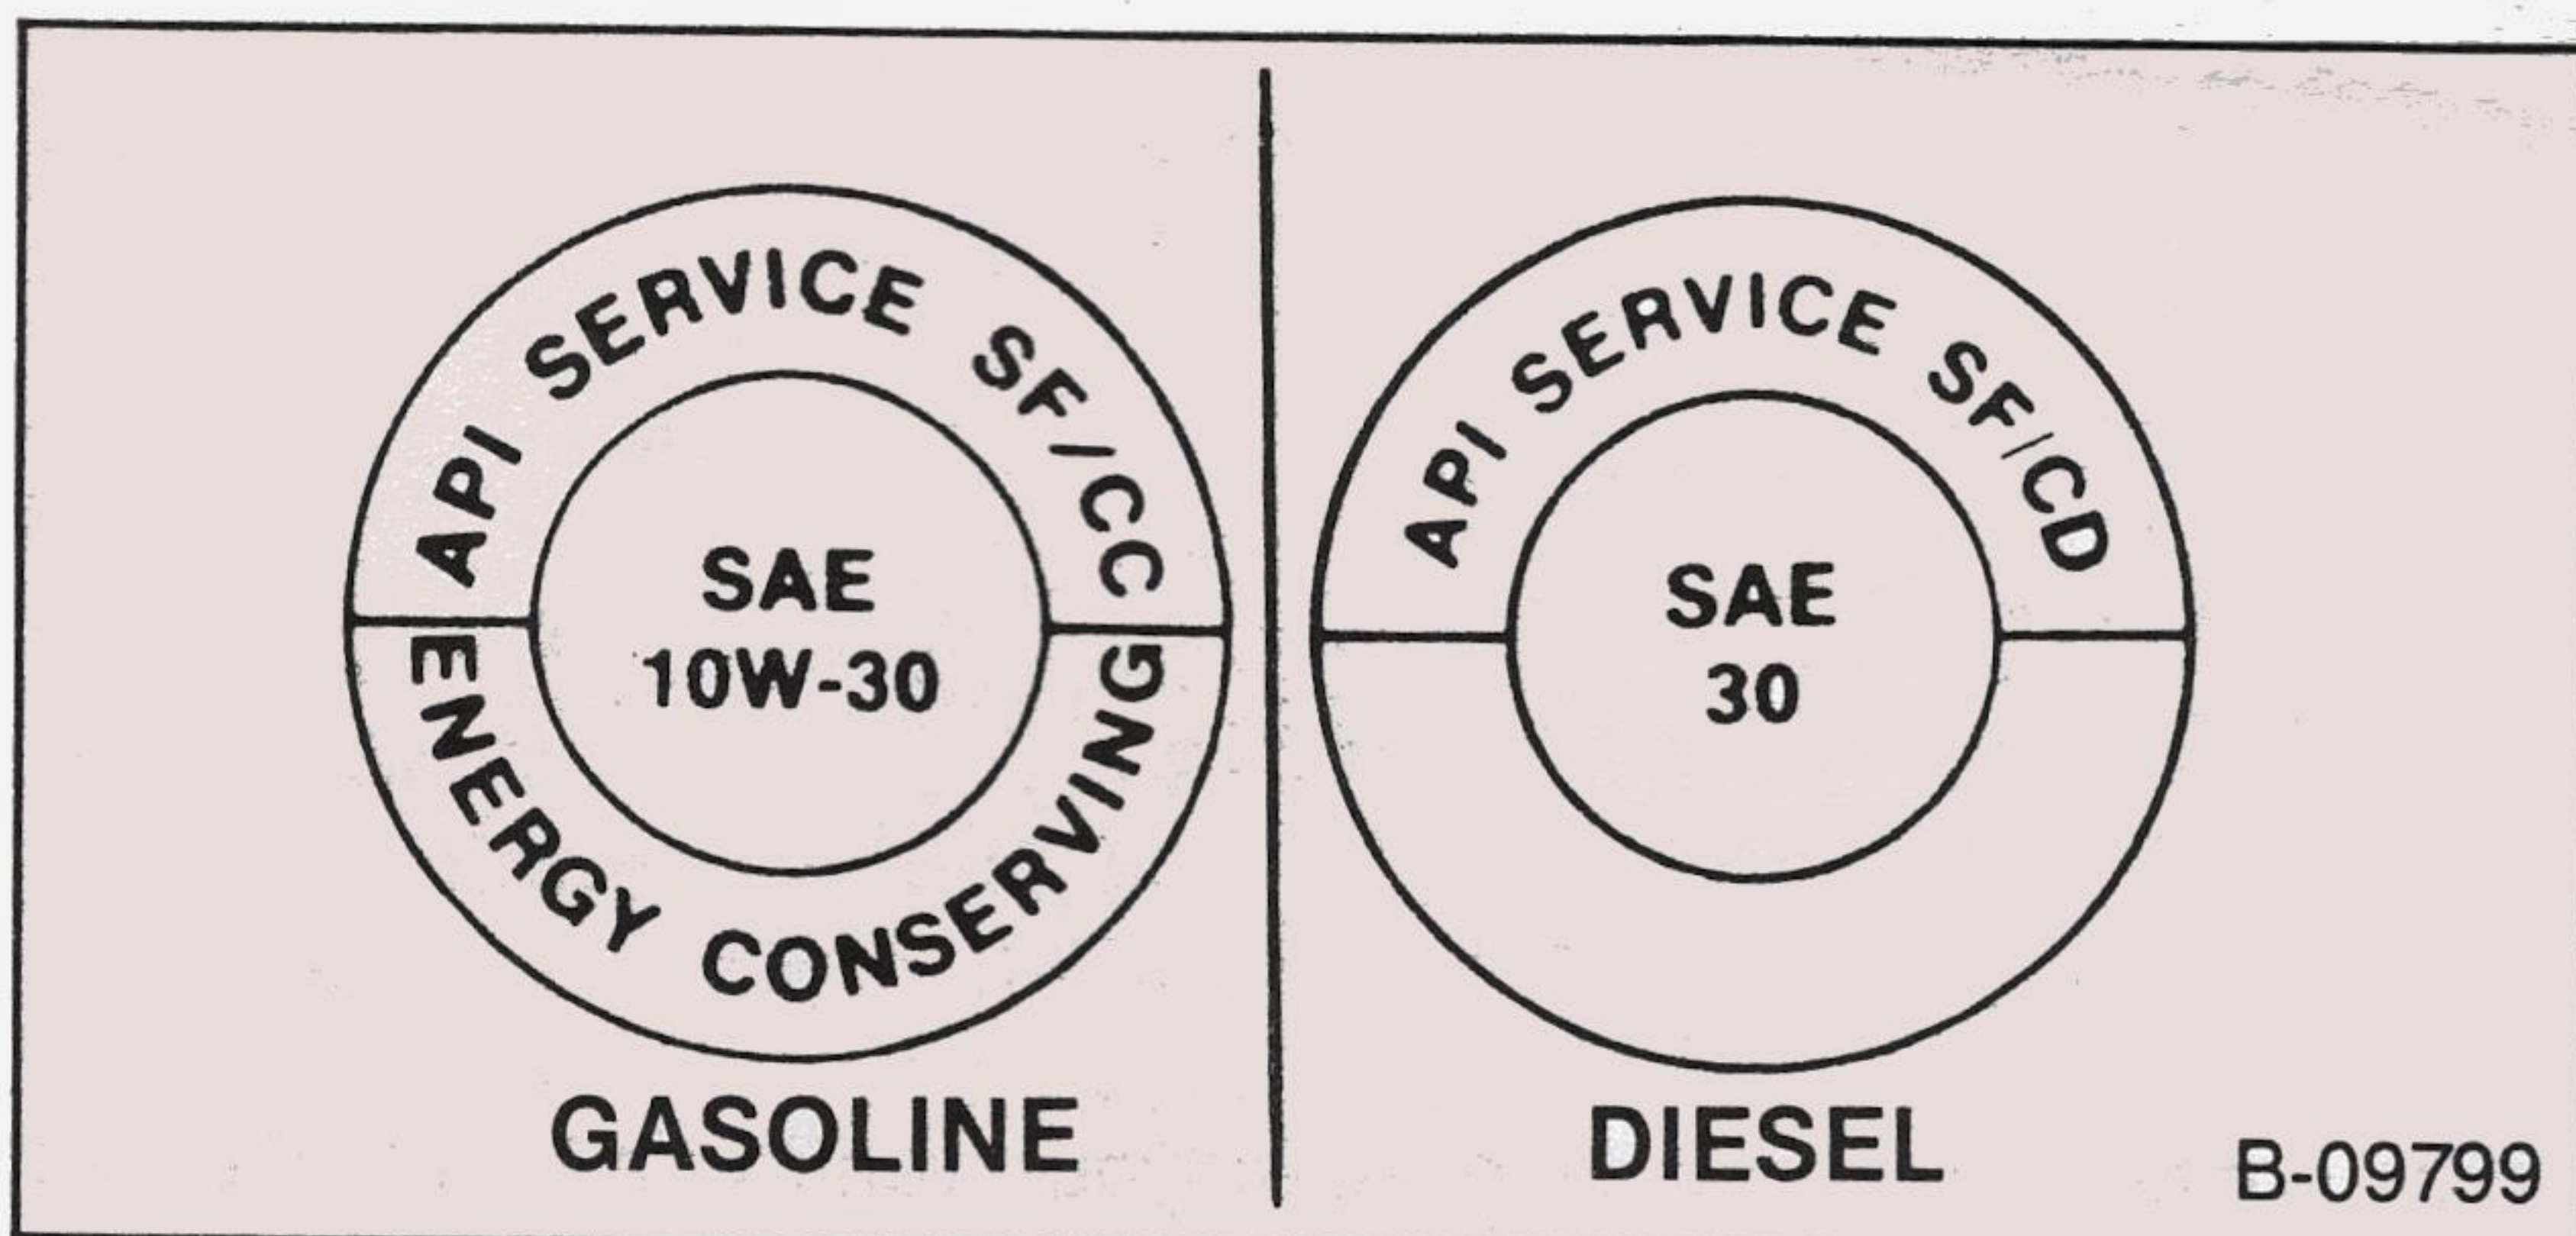

TIRE INFLATION PRESSURES

Check tire inflation pressures at least monthly (including the spare). Keep them inflated to the pressures shown on the Certification Label on the rear of the driver's door.

ENGINE COOLING SYSTEM

Check the fluid level in the coolant recovery tank at regular intervals, such as during a fuel stop. (See "Engine Cooling System" in "Service and Maintenance," Section 5 of this manual.)

WINDSHIELD WASHER

Check the windshield washer reservoir fluid level regularly. Use a washer fluid such as GM Optikleen.

BATTERY

Your new vehicle has a Delco FREEDOM battery (two FREEDOM batteries with an optional diesel engine). You will never have to add water. The hydrometer (test indicator) in the cover provides information for testing purposes only.

For continuing satisfaction keep your vehicle all GM. General Motors parts are identified by one of these trademarks.



INDEX

A

Accelerator Linkage5-25
Adding Coolant5-23
Additives, Engine Oil .5-13, 5-18
Air Cleaner5-8, 6-3
Air Conditioner2-61, 5-28
Air Cylinders2-70
Air Injection Reaction
System5-6
Air Vents2-59
Alcohol/Gasoline Blends . . .2-11
Alignment, Front End5-35
Aluminum Wheels,
Cleaning4-7
Appearance Care4-1
Automatic Transmission . . .2-32
Fluid5-19
Axle
Locking Rear2-70
Maximum Weights0-6
Standard Rear5-25

B

Balancing, Wheels and
Tires5-35
Battery
Delco Freedom5-27, 7-1
Jump Start3-2
Bearings, Front Wheel5-28
Before Driving Off1-1
Belts, Seat and Lap1-13
Bench/Bucket Seat1-9
Block Heater2-24
Body Lubrication5-28
Brake
Floor Controls2-46
Hydraulic Boost System . . .5-26
Hydraulic Power2-48
Master Cylinder5-25

Parking Brake Controls . . .2-49
Pedal2-48
Proportioning Valve2-49
System Maintenance5-25
System Warning Light . . .2-47
Torque Lock2-48
Vacuum Power2-47
Wear Indicators2-49
Wet2-47
Break-In, New Vehicle2-3
Bulbs6-4

C

Cap
Fuel5-4, 7-1
Radiator5-25
Capacities6-2
Care and Cleaning
Aluminum Wheels4-7
Bright Metal Trim4-7
Exterior4-6
Fabric Type Trim4-3
Glass4-5
Interior4-1
Leather4-5
Materials4-10
Polishing4-6
Roof Panels4-6
Seat Belts4-5
Stain Removal4-4
Vinyl4-5
Washing4-6
Weather Strip
Lubrication4-7
White Sidewall Tires4-7
Cargo, Securing0-9
Catalytic Converter5-4
Center Seat Lap Belt1-16
Certification Label0-6

Charging System Warning	
Light	2-54
"CHECK ENGINE" Light	2-54
Checking Engine Oil	5-8, 5-14
Checklist, Driver Daily	1-1
Chemical Paint Spotting	4-8
Child Restraint	1-17
Choke Warning Light	2-55
Cigarette Lighter	2-59
Circuit Breakers	6-5
Cleaning	4-1
Clock	2-59
Clutch	
Pedal	2-50
Pedal Adjustment	5-21
Cold Weather Starting	
Gas	2-23
Diesel	2-27
Computer Command	
Control	5-6
Contents	0-1
Convex Mirror	1-8
Cooling System	5-21
Capacities	6-2
Care	5-22
Coolant Addition	5-23
Engine Overheat	3-4
"LOW COOLANT" Light	2-55
Pressure Cap	5-24
Temperature Gage	2-57
Temperature Warning	
Light	2-55
Thermostat	5-25
Corrosion Protection	
Finish	4-8
Sheet Metal	4-7
Underbody	4-8
Crankcase	
Capacity	6-2
Filter	6-3
Cruise Control	2-44
Cylinders, Air	2-70

D

Daily Checklist	1-1
---------------------------	-----

Damage	
Finish	4-8
Sheet Metal	4-7
Tire	3-12
Data Code, Engine	6-8
Defroster/Defogger	2-62
Deposits, Foreign Material	4-8
Descending a Grade	2-32
Diesel Engine	
Air Cleaner	6-3
Cleaning	5-7
Fuel Filter	6-3
Fuel Requirements	2-12
Dimmer Switch	2-42
Door Locks	1-6
Driver Daily Checklist	1-1
Driver's Seat	
Controls	1-8
Seatback Latches	1-10

E

Electrical	
Battery	5-27
Equipment	6-4
Exterior Lights	6-4
Fuses	6-5
Interior Lights	6-4
System Data	6-4
Emergency	
Engine Overheat	3-4
Hazard Warning Flashers	3-1
Starting	3-2
Stuck Vehicle	3-1
Towing	3-13
Energy Conserving Oils	5-10
Engine, Diesel	
Block Heater	2-28
Cold Weather Start	2-27
Crankcase Capacity	6-2
Identification Number	6-7
Oil	5-14

Engine, Diesel (Cont.)	
Overheat	3-4
Service	5-3
Starting	2-23
Engine, Gasoline	
Block Heater	2-24
Cold Start	2-23
Cooling System	5-21
Crankcase Capacity	6-2
Oil	5-8
Overheat	3-4
Service	5-3
Starting	2-23
Warm Starting	2-24
Ethanol Blends	2-11
Exhaust System	
Engine	2-2
Heavy Duty	5-5
Extended Vehicle	
Storage	3-13
Exterior	
Care and Cleaning	4-6
Chemical Spotting	4-8
Corrosion Protection	4-7
Maintenance Materials	4-10

F

Fabric Care	4-2
Fasteners, Replacement	5-3
Filter	
Crankcase	6-3
Fuel	6-3
Fuel, Replacement	2-20
Fuel, Water Drain	2-17
Oil	5-12, 6-3
Finish Damage	4-8
Flame Arrestor	5-8
Flasher, Hazard	
Warning	3-1, 2-41
Floor Controls	2-46
Fluid	
Automatic Transmission	5-19
Capacities	6-2
Manual Transmission	5-20

Power Steering	5-26
Windshield Washer	2-42
FM Reception	2-63
Foreign Material Deposits	4-8
French Owner's Manual	0-4
Front Seat/Lap Belts	1-14
Front Suspension	5-27
Front Wheel Bearings	5-28
Fuel	
Cap	5-4, 7-1
Filter, Replacement	2-20
Filter, Water Drain	2-17
Gage	2-52
Requirements -	
Diesel	2-12, 7-2
Requirements - Gas	2-8, 7-1
Selection	2-22
Tank Capacities	6-2
Tank Purge	2-18
"WATER IN FUEL"	
Light	2-56
Fuses	6-5

G

Gages	
Engine Coolant	
Temperature	2-57
Fuel	2-52
Oil Pressure	2-57
Voltmeter	2-57
Gasoline	2-12
Alcohol and Ethanol	
Blends	2-11
GAWR	0-6
Glass Surfaces	4-4
Glide-Out Tire Carrier	3-14
Glow Plug Light	2-56
Graphic Symbols	0-3
Guard Against Theft	2-29
GVWR	0-6

H

Hazard Warning Flasher	3-1
----------------------------------	-----

Headlights	
Dimmer Switch	2-42
Hi Beam Indicator	2-58
Main Switch	2-58
Heater	
Engine Block	2-24, 2-28
Output	2-61
Heating System	2-60
Hi Beam Indicator	2-58
Hood, Release	7-2
Hood, Latch and Hinge	5-25
Horn	2-46
Hub Locks	2-44
Hydro-Boost Brake	
System	5-26
Hydraulic Brakes	2-48

I

Identification Numbers	6-7
Indicator Lights	2-53
“CHECK ENGINE”	2-54
Glow Plugs	2-56
Headlight High Beam	2-58
Oil/Choke	2-53
“SERVICE ENGINE	
SOON”	2-54
Inflation Pressure	5-41
Inside Rearview Mirror	1-8
Instrument Panel	2-51
Instruments	
Odometer	2-52
Speedometer	2-52
Interior	
Care and Cleaning	4-1
Light Bulbs	6-4
Introduction	0-2

J

Jacking	3-7
Jack Stowage	3-10
Jump Starting	3-2

K

Keys	1-2
----------------	-----

L

Label	
Certification	0-6
Service Parts I.D.	6-2
Lamp Bulb Data	6-4
Lap Belts	
Care	4-4
Center Seat	1-16
Front Seat	1-14
Inspection	1-17
Retainers	1-13
Latch, Seatback	1-10
Lighter	2-58
Lights	
Exterior Bulbs	6-4
Hazard Warning	3-1
Headlight Dimmer	
Switch	2-58
Indicator	2-53
Interior	6-4
Main Switch	2-58
Warning	2-53
Linkage	5-25
Accelerator	5-25
Steering	5-27
Loading, Vehicle	0-5
Lock	
Door	1-6
Torque (Brake)	2-48
Locking Rear Axle	2-70
Lubrication, Body	5-28

M

Main Lights	2-58
Maintenance	
Air Cleaner	5-8
Appearance Care	
Materials	4-8
Brake System	5-25

Maintenance (Cont.)	
Check Oil Level	5-8, 5-14
Clutch	5-21
Cooling System	5-21
Oil Change Interval	5-11, 5-17
Owner	5-1
Power Steering	5-26
Schedule	5-3
Transmission	5-19
Underbody	4-8
Wheels and Tires	5-29
Manual Window Control	1-7
Manual Transmission	2-37
Driving Precautions	2-38
Fluid	5-20
Master Cylinder, Brake	5-25
Mirrors	1-8
Mobile Radio Systems	2-79

N

New Vehicle Break-In	2-3
Noise Emission	
Control System	5-1
Number Locations	
Engine Serial	6-7
Vehicle Identification	0-8, 6-7

O

Odometer	2-64
Oil	
Additives - Diesel	
Engine	5-18
Additives - Gas Engine	5-13
Change Interval	5-11, 5-17
Check Level	5-8, 5-14
Choke Indicator Light	2-55
Crankcase Capacity	6-2
Disposal of Used	
Oil	5-14, 5-19
Energy Conserving	5-10
Filter	5-12, 6-3
Logo	5-10, 5-16
Pressure Gage	2-57

Recommendations -	
Diesel	5-14
Recommendations - Gas	5-8
Viscosity - Diesel	5-15
Viscosity - Gas	5-9
Operation In Foreign	
Countries	2-21
Operating	2-1
Outside Rearview Mirror	1-8
Overheat	3-4
Overloading	0-5
Owner Maintenance	5-1
Owner's Manual, French	
Edition	0-4

P

Paint Spotting	4-8
Parking	2-30
Parking Brake Pedal	2-49
Parts	
Identification Label	6-3
Replacement	6-3
PCV Valve	6-3
Pedal	
Brake	2-48
Clutch	2-50
Clutch Adjustment	5-21
Pigskin Cleaning	4-4
Power Door Locks	1-6
Power Steering	2-40
Power Window Control	1-7
Propeller Shaft Slip	
Joints	5-29
Proportioning Valve	
(Brake)	2-59
Purge, Fuel Tank	2-18
Publications	Last Pg.

R

Radiator Pressure	
Cap	5-25
Radios	2-63
Rear Axle, Standard	5-25

Rear Seat Belts	1-15
Rear Shoulder Belts	1-16
Replacement Fasteners	5-3
Replacement Parts	6-3
Retainers, Lap Belt	1-13
Roof Panel Cleaning	4-6
Rotation, Tire	5-32
Rust Protection	4-7

S

Seats	1-8
Seatback Latch	1-10
Seat Belt Inspection	1-17
Seat Belt Care	4-5
Service and Maintenance	5-1
“SERVICE ENGINE SOON” Light	2-54, 5-6
Service Parts Label	6-2
Service Publications	Last Pg.
Service Station Information	7-1
Sheet Metal Damage	4-7
Shifting Automatic Transmission	2-32
Manual Transmission	2-37
Slippery Surfaces	2-31
Snow, Operation In (Diesel)	2-25
Spare Tire	3-10
Spark Plugs	6-3
Speakers	2-63
Specifications	6-1
Speedometer	2-52
Stain Removal	4-4
Starting	2-1
Cold Weather	2-23
Diesel Engine	2-27
Gasoline Engine	2-23
Jump Start	3-2
Start-Up Checklist	1-1
Steering Column Controls	2-39
Column Lock	2-39
Linkage	5-27
Power System	2-40

Power System Maintenance	5-26
Tilt Wheel	2-41
Stuck Vehicle	3-12
Suspension, Front	5-27

T

Tailgate, Quick Release	2-8
Tamper Resistant Odometer	2-52
Tape and Tape Player Care	2-69
Temperature Control Lever	2-60
Thermostat	5-25
Tightening Wheel Nuts	3-9
Tilt Steering Wheel	2-41
Tires	5-29
Alignment	5-35
Chains	5-35
Dual Operation	5-34
Damage	3-12
Inflation	5-29
Inspection	5-32
Light Truck Type	5-31
Load and Inflation Information	5-41
Passenger Car Type	5-30
Replacement	5-36
Rotation	5-32
Spare	3-10
Stowage	3-10
Temperature	5-37
Traction	5-35
Treadwear	5-36
Warranty	5-40
Torque, Wheel Nuts	3-10
Towing Emergency	3-12
Trailer	2-4
Trailer Towing Tips	2-7
Traction	5-35
Trailer Package	0-7

Trailer Towing	2-4
Tips	2-7
Transmission	2-31
Automatic	2-32
Descending a Grade	2-32
Fluid, Automatic	5-19
Fluid, Capacity	6-2
Fluid, Manual	5-20
Manual	2-37
Turn Signal	
Bulbs	6-4
Lever	2-41

U

Underbody Maintenance	4-8
Updated Service	
Information	6-8
Used Oil Disposal	5-14

V

Vacuum Brakes	2-47
Valve, PCV	6-3
Vehicle	
Break-In Procedure	2-4
Identification	
Number	0-8, 6-7
Loading	0-5
Operation Over Combustible	
Materials	2-31
Ventilation	2-59
Vents, Air	2-59

Voltmeter	2-57
---------------------	------

W

Warning, Hazard Flasher	3-1
Warning Lights	2-53
“BRAKE”	2-56
Charging System	2-54
Choke	2-55
Engine Coolant	
Temperature	2-54
“LOW COOLANT”	2-55
“WATER IN FUEL”	2-56
Warranty	
Overloading Effect On	0-6
Tire	5-40
Washing Your Vehicle	4-6
Water Drain, Fuel Filter	2-17
“WATER IN FUEL” Light	2-56
Wear Indicators, Brake	2-49
Weights	0-6
Wet Brakes	2-47
Wheels	5-29
Balancing	5-35
Front Bearings	5-28
Nut Torques	3-9
Replacement	5-39
Tightening Sequence	3-9
Window Controls	1-7
Windshield	
Cleaning	4-6
Defrost/Defog	2-61
Delay Wiper System	2-43
Wiper/Washer Controls	2-43

OPERATING RECORD

[illegible][illegible]

Service Publications— Chevy Van

The following publications covering the operation and servicing of your Chevrolet can be purchased by filling out the reverse side of this order form and mailing it with your check or money order to Helm, Incorporated.

SERVICE AND OWNER'S MANUALS

Form No.	Description	Price
ST330-86	1986 CHEVROLET VAN SERVICE MANUAL Contains general service information: maintenance to all systems, removal and installation of components, and electrical system coverage. Some repair information is also included (e.g. brake master cylinder, distributor, etc.) <i>Available January, 1986.</i>	\$18.00
ST333-86	1986 OVERHAUL MANUAL Includes basic off-the-vehicle overhaul of major components, (e.g. transmission, etc.) <i>Available April, 1986.</i>	\$8.00
15547647	1986 CHEVROLET VAN OWNER'S MANUAL	\$2.00

PRODUCT SERVICE PUBLICATIONS

PSPI-83	1983 Index And Summaries	FREE
PSPI-84	1984 Index And Summaries	FREE
PSPI-85	1985 Index And Summaries	FREE
PSPI-86	1986 Index And Summaries (Available Dec., 85)	FREE
PSP-83	All 1983 Product Service Publications	\$35.00
PSP-84	All 1984 Product Service Publications	\$40.00
PSP-85	All 1985 Product Service Publications	\$45.00
PSP-86	Subscription To All 1986 PSP's	\$90.00
Binder	Special — Will Hold All PSP's For An Individual Model Year	\$10.00

Please fill in reverse side of this form completely.

Prices subject to change.

NOTE: Please fill in order form and MAIL TO:

HELM

Post Office Box 07130
Detroit, Michigan 48207

Orders will be mailed within
10 days of receipt. Please allow
adequate time for postal service.

QUANTITY	FORM NO. *	PRICE EACH	TOTAL
		\$	\$
		\$	\$
		\$	\$
		\$	\$
		\$	\$
		\$	\$
PRICES SUBJECT TO CHANGE			
Total Order			\$
Michigan Purchasers—Add 4% Sales Tax ► Mich. Sales Tax			\$
Grand Total			\$

* Orders for Individual Product Service Publications cannot be filled without the appropriate bulletin numbers. These numbers may be found in the PSP Index. Your first Product Service Publication costs \$3.00; each additional PSP costs \$1.00.

Make check or money order (NO STAMPS) for the total amount payable to Helm, Incorporated.

NOTE: Prices apply to owners in the United States only. Canadian residents should obtain a Canadian Service Manual Order Form from any General Motors dealership.

Other purchasers outside domestic U.S.A. please write to Helm, Incorporated, P.O. Box 07130, Detroit, Michigan 48207 for quotation.

Name of Purchaser (Please print clearly)

Street Address

City, State and Zip Code

This is your shipping label  **Please print clearly**

FROM. . .

HELM

Post Office Box 07130

Return Requested

**CHEVROLET MANUAL
DISTRIBUTION DEPARTMENT
DETROIT, MICHIGAN 48207**

FOR

Name

Street Address

Apt. No.

City, State and Zip Code

 **PLEASE COMPLETE SHIPPING LABEL**

CUT HERE 

